# SYMPHONY 18 - SYMPHONY AIR SERIES

71 ¾ x 36 x 21 (1820 x 915 x 535) • Fax on Demand #1347

### MODEL #AIAL7236SYAIR



## AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

## COLOR & TRIM OPTIONS

#### Stock

Almond Bone Linen/Biscuit Sterling Silver White

## **FEATURES**

- Air bath system
- Air blower
- Air heating system
- Automatic purge and dry cycle
- Bath-side on/off button
- Sculpted armrests
- Slip-resistant floor
- Universal drain
- Lucite cast acrylic surface
- Limited 10-year warranty

## **OPTIONS**

- Comfort pillow: Biscuit, Black, White
- Bolt-on grab bar(s): Chrome, Oil-Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, White)
- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Lift & turn waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel
- Optional blower location
- Acrylic skirt: Color Matched






## TECHNICAL SPECIFICATIONS


Symphony Series • Fax on Demand #1347


# SYMPHONY 18

71 ¾ x 36 x 21 (1820 x 915 x 535) inches (mm)



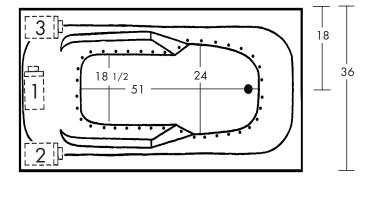

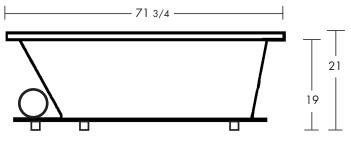



FEATURES Ibs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Air System	Heater	Controls	Drain	Pkg. Wt.
Air Bath #AIAL7236SYAIR	Acrylic	Channel	Inline	Pneumatic	Universal	178 (80)

#### **DIMENSIONS** inches (mm)


Width	<b>Depth</b>	<b>Height</b>	Skirt
Overall / Net	Overall / Net	Overall / Net	Height
71 ¾ (1820)	36 (915)	21 (535)	_

### SUMP DATA inches (mm)

Capacity to Overflow	Min. Operating Capacity	WIDTH @	WIDTH @ centerline		DEPTH @ centerline	
gal (ltr)	gal (ltr)	Тор	Bottom	Тор	Bottom	
80 (302)	60 (230)	64 ½ (1650)	52 ¾ (1340)	26 ¾ (650)	24 ¾ (600)	

### PLUMBING DIMENSIONS inches (mm)

А	В
3 (75)	10 ¾ (275)



# ELECTRICAL DATA

Component	Specification	Requirement
Blower/Heater	5 AMP; 120 V	15 AMP; 120V, separate circuit; Class A GFCI

NOTES: 1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 20 (405 x 510) minimum access required at pump/blower location(s).

Each Symphony air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.