36AC – ACRYLIC SHOWERS

36 x 36 x 84 (915 x 915 x 2135) • Fax on Demand #4001

STANDARD MODEL #36AC
STEAM MODEL #S36AC

FEATURES

– Decorative back wall

– Molded toiletry shelves

– Acrylic grab bar

– Slip-resistant floor

– Center drain

– Lucite cast acrylic surface

– Limited 5-year warranty

– Steam System (S36AC)

– Pre-plumbed steam generator

– Steam outlet: Chrome

– Steam door: Chrome
  w/ Clear or Obscure glass

– Electronic control

– Aromatherapy

– Dome light

– Brass drain with stainless
  steel cover

OPTIONS

– Brass drain (standard on
  steam models)

– Dome light (standard on
  steam models)

– Shower door series: L533

AQUATIC ADVANTAGE

– National distribution

– 6 manufacturing facilities

– Private fleet

– Centralized customer service

– Field support

– 24-hour fax-on-demand

COLOR & TRIM OPTIONS

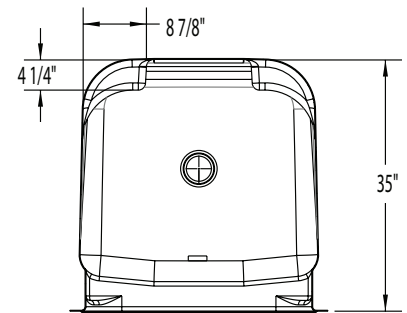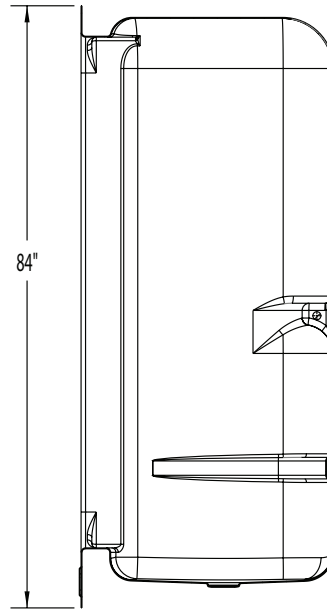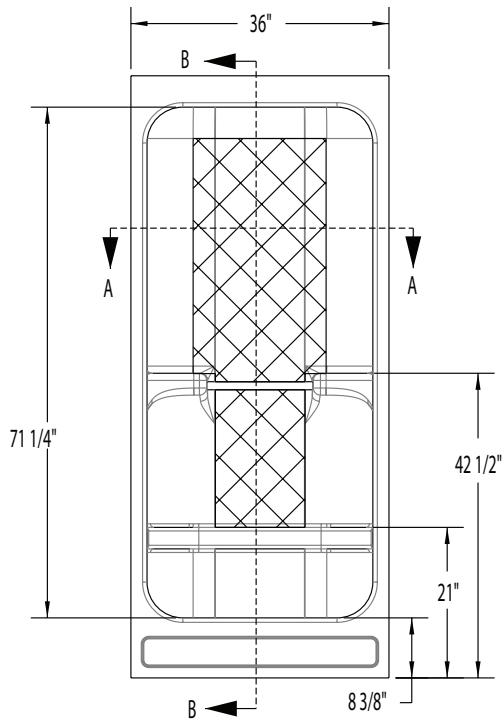| Stock	Premium
Almond	Black
Bone	Cashmere
Linen/Biscuit	Mexican Sand
Sterling Silver	Red
White	Sandbar

AQUATIC

Where Inspiration Takes Shape

36AC

36 x 36 x 84 (915 x 915 x 2135)
inches (mm)

Electrical Requirements:
Generator - 230V, 30AMP, GFCI
Dome Light - 120V, 10AMP, GFCI

36"
B
A — A
71 1/4"
42 1/2"
21"
B
8 3/8"

84"

8 7/8"
4 1/4"
35"

SECTION A-A

FEATURES lbs (kg)

Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

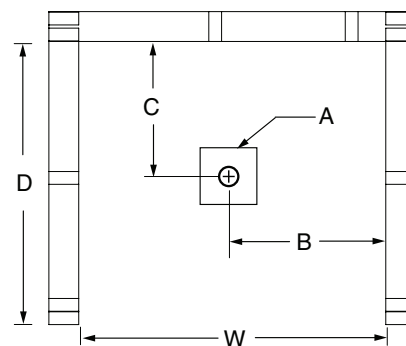| Type and Model #	Material	Wall Finish	Pieces	Drain	Seats	Lights	Pkg. Wt.
Shower #36AC	Acrylic	Smooth wall	1	Center	–	Optional	130 (59)
Steam Shower #S36AC	Acrylic	Smooth wall	1	Center	–	6" Recessed	154 (70)

DIMENSIONS

Specifications	inches (mm)
Width: Overall / Net	36 (915)
Depth: Overall / Net	36 (915) / 36 (915)
Height: Overall / Net	84 (2135)
Enclosure Opening	31 ½ (800)W x 71 (1805)H
Skirt Height	8 ⅜ (210)
Drain Rough-In (from Back Wall)	16 ½ (420)
Drain Rough-In (from Side Wall)	18 (455)
Drain: Diameter / Clearance	3 ¼ (85) / 2 ¾ (70)

FRAMING DIMENSIONS inches (mm)

Type	D Depth	W Width	H Height	A Box-Out	B	C
Alcove	37 (940)	36 ⅛ (920)	–	6 x 6 (150 x 150)	18 (455)	16 ½ (420)

C
A
D
B
W

*Refer to installation instructions for further detail. (domed models)