

# VELENCIA II – BUILDERS' CHOICE

inches (mm)

74 x 44 3/8 x 19 1/2 (1880 x 1125 x 495) • Fax on Demand #5097

SOAKER MODEL #8774620

WHIRLPOOL MODEL #8774621



## FEATURES

- 8 hydrotherapy jets
- .75 hp pump
- Advanced safety suction system
- Bath-side on/off button
- Slip-resistant floor
- Center drain
- Lucite cast acrylic surface
- Limited 10-year warranty

## OPTIONS

- Comfort pillow:  
Biscuit, Black, White
- 1.5kW inline maintenance heater
- Grab bar(s): Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color matched (Biscuit, White, Clear)
- Lift & turn waste & overflow:  
Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel
- Optional pump location

## AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

## COLOR & TRIM OPTIONS

Stock



Almond (C)  
Bone (C)  
Linen/Biscuit (C)  
Sterling Silver (C)  
White (C)

C = Color Matched Trim



# VELENCIA II

74 x 44 3/8 x 19 1/2 (1880 x 1125 x 495)  
inches (mm)

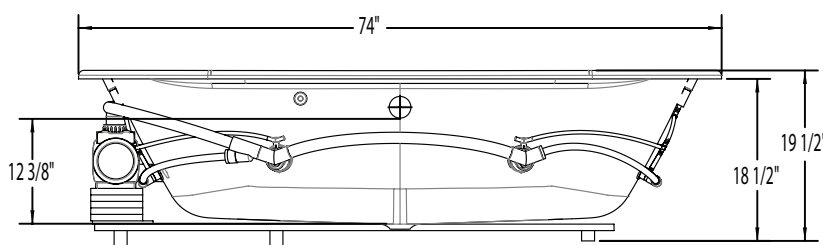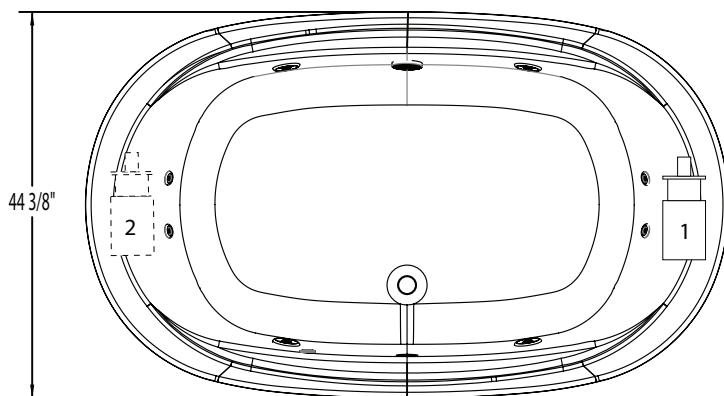

**FEATURES** lbs (kg) Dimensional Tolerance  $\pm 3/8"$ . Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Heater	Controls	Drain	Pkg. Wt.
Soaker #8774620	Acrylic	0	-	-	-	Center Front	86 (39)
Whirlpool #8774621	Acrylic	8	0.75 HP	1.5kW inline (optional)	Pneumatic	Center Front	136 (62)

## DIMENSIONS inches (mm)

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
74 (1880)	44 3/8 (1125)	19 1/2 (495)	-

## SUMP DATA inches (mm)


Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
84 (318)	52 (197)	67 (1700)	52 3/8 (1335)	35 3/8 (900)	32 1/2 (825)

## PLUMBING DIMENSIONS inches (mm)

A	Drain to Overflow	Drain Diameter / Clearance
3 1/2 (90)	12 3/8 (315)	2 (50) / 1 1/4 (30)

## ELECTRICAL DATA

Component	Specification	Requirement
Pump	.75 HP; 5 AMP; 120 V	15 AMP; 120V, separate circuit; Class A GFCI



### NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 20 (405 x 510) minimum access required at pump/blower location(s).