

# SERENITY 16 – SERENITY SERIES

inches (mm)

70 ¼ x 35 ¾ x 24 ¾ (1785 x 910 x 630) • Fax on Demand #1200

SOAKER MODEL #A116AIR7036TO

AIR BATH MODEL #A116AIR7036

HOT SOAK MODEL #A116AIR7036HS



## AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

## COLOR & TRIM OPTIONS

Stock	Premium
Almond	Black
Bone	Cashmere
Linen/Biscuit	Mexican Sand
Sterling Silver	Red
White	Sandbar

## FEATURES (ALL MODELS)

- Deep bathing well
- Slip-resistant floor
- Acrylic grab bar
- Sculpted armrests
- Pre-leveled ABS support base
- Center Front drain
- Lucite cast acrylic surface
- Limited lifetime warranty

## AIR BATH FEATURES

- Variable speed blower with 20-minute timer
- Air heating system
- Electronic controls with wave and pulse features
- Air channels lined with antimicrobial coating
- Automatic purge and dry cycle with water sensors
- Chromotherapy LED lighting

## HOT SOAK FEATURES

- 1.5kW inline maintenance heater
- Quiet run-dry safe pump
- Circulation portal covers
- Pre-leveled ABS support base
- Quiet pad anti-vibration pump mount

## OPTIONS

- Comfort pillow: Biscuit, Black, White
- Grab bar(s): Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color matched (Biscuit, White, Clear)
- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Optional blower/pump location
- Remote control kit
- Remote blower wiring kit





## SERENITY 16

70 1/4 x 35 3/4 x 24 3/4 (1785 x 910 x 630)  
inches (mm)



Note: Serenity tub only models feature a Pre-leveled ABS Support Base.

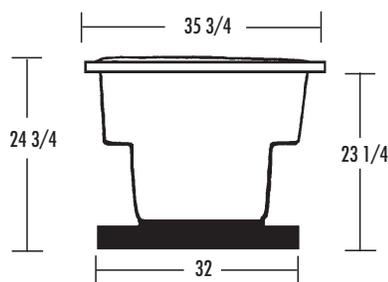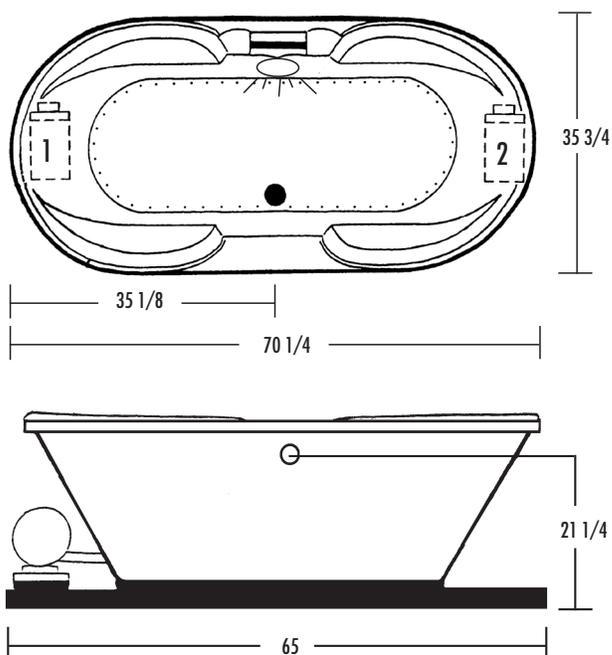

**FEATURES** lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Air System	Blower	Pump	Heater	Controls	Drain	Pkg. Wt.
Soaker #A116AIR7036TO	Acrylic	-	-	-	-	-	Center Front	171 (76)
Hot Soak #A116AIR7036HS	Acrylic	-	-	Run-dry safe	1.5 kW Inline maintenance	Electronic on/off	Center Front	201 (91)
Air Bath #A116AIR7036	Acrylic	Channel	Variable speed	-	Inline	Electronic	Center Front	201 (91)

### DIMENSIONS inches (mm)


Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
70 1/4 (1785)	35 3/4 (910)	24 3/4 (630)	-

### SUMP DATA inches (mm)

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
80 (303)	-	64 (1625)	46 3/4 (1185)	22 3/4 (580)	20 1/4 (515)

### PLUMBING DIMENSIONS inches (mm)

A	B
5 3/8 (135)	12 (305)



### ELECTRICAL DATA

Component	Specification	Requirement
Blower/Heater (Air Bath)	10.5 AMP; 120 V	15 AMP; 120V, separate circuit; Class A GFCI
Pump (Hot Soak)	1/15 HP; 1.3 AMP; 110 V	20 AMP; 110 V, separate circuit; Class A GFCI
Heater (Hot Soak)	1.5 kW; 12.5 AMP; 110 V	

#### NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 20 (405 x 510) minimum access required at pump/blower location(s).

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.