



Technical Product Specifications


Fresh Air Intake with Molded Plastic Grid and Fixed Louvers


- 4" (10.2cm), 5" (12.7cm), 6" (15.2cm) Louvered Vent Hood only 4" (10.2cm) Louvered Vent Hood with Pipe and Collar

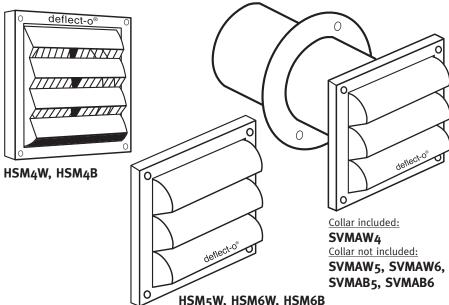

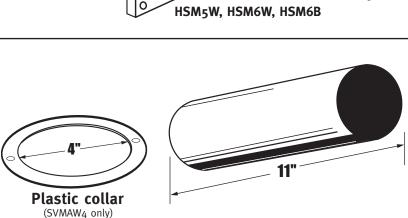

Model No.	Α	В	С
HSM4W	6"	51/2"	4"
HSM4B	6"	51/2"	4"
SVMAW4	6"	51/2"	4"
HSM ₅ W	8"	71/2"	5"
HSM6W	8"	71/2"	6"
HSM6B	8"	71/2"	6"
SVMAW ₅	8"	71/2"	5"
SVMAB ₅	8"	71/2"	5"
SVMAW6	8"	71/2"	6"
SVMAB6	8"	71/2"	6"





for all plastic molded fresh air intake vents

- Calcium filled Polypropylene
- Melting point: 325° F+
- UV Inhibitor added

Pipe

Aluminum

Collar

Styrene

Technical Data

Free Air


4" (10.2cm) dia. = 12 sq.in (77 sq.cm) 5", 6" dia. = 20 & 28 sq.in (129 sq.cm)

Protective Grid Size


4"(10.2cm) dia. = protective grid on each stationary louver 5", 6" dia. = protective grid on back -1/2" (12.7cm)sq. openings

General Information

- Stationary molded plastic louvers
- · quick, easy installation
- plastic furnace fresh air intakes come with a molded screen to help prevent birds and rodents from entering
- · durable weather resistant







Rear View

4/09

DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2