Electronic Exposed TECK° Flush Valves





81T201-WMSBT Exposed Battery Operated 1-1/2" Top Inlet Closet Fixture

- Polished chrome plated vandal resistant metal cover with 4" wallmount sensor
- Right or left-hand supply installation
- ADA compliant, automatic operation battery powered H₂OPTICS[®] technology infrared sensor
- Four (4) 'C' cell batteries
- Low battery level indicator (5000 flushes remaining)
- Infrared sensor range adjustment of 610mm-1422mm (24" 56") in 8" increments, factory
- set at 40" (±2")
- Vandal resistant copper tube conduit
- 24 hour courtesy flush factory set to off
- 6 VDC input
- Electronic manual override button
- Quiet action, Teck® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated finish
- External water conserving flush adjustment, factory set at 60 PSI to 6 litre (1.6 US gal.) (except -48 and -6 models)
- 1" FIP/Copper sweat inlet adaptor, angle check stop with protecting cap
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- Cover tube, stainless steel wall flange, spud flange, concealed spud nut, and 292mm (11-1/2") outlet tube.

🗆 81T201-6-WMSBT


Same as 81T201-WMSBT, but **Not Field Adjustable**

31T201-48-WMSBT

Same as 81T201-WMSBT, but factory set at 60 PSI to 4.8 litre (1.27 US gal.), **Not Field Adjustable**





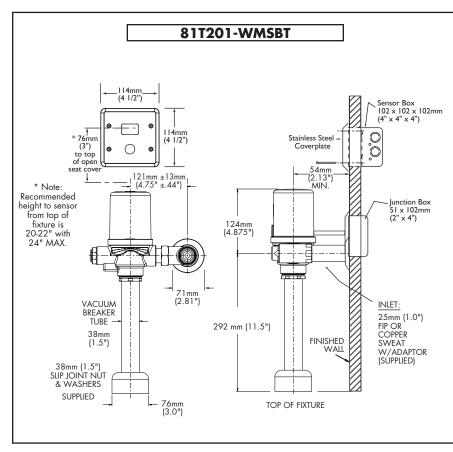

Note: For high and low pressure applications, please see page FEA-81T High Water Pressure note for more details.

Verify flow requirements with bowl manufacturer.

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page as a product submittal sheet.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability. DSP-81T201-WMSBT Rev. B

CSA certified
Complies to ASSE 1037
ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
(Contact Delta Representative for State and/or Local Approvals.)
U.S. Patent # 6, 826, 455

Other Patents Pending

Approvals:



Engineer/Architect Approval

Model Specified:

Approval:

Date: