



Surgeon Scrub-Up

Pedal Valve

Model No: 54T5332A

COMPLIES WITH:

- CSA certified.
- Complies to ASME Standard A112.18.1.
- (Contact Delta Representative for State and/or Local Approvals)
- Long foot pedals ADA compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs operating force





SPECIFICATION:

- Foot Pedal Mixing Valve
- Spout: R2 Gooseneck spout-4.5" radius 10.5" height (unmounted) -Standard rigid/swivel field installation unless LS Limited swing option selected-Vandal resistant .090" wall thickness(R2)
- Outlet#: 2 Vandal Resistant Laminar Flow Outlet- 1.5 USGPM (5.7 L/Min) flow rate at 60 psi- with Antimicrobial by AgION™
- · Forged brass wallmount self close foot pedal valve
- Two aluminum indexed pedals
- Polished chrome plated finish
- · With inlet stops
- With outlet volume control stop
- · Set screw wall flanges
- · Deckmount brass flange,
- 3/8" IPS shank, and locknut


OPERATION:

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 11, 2012.



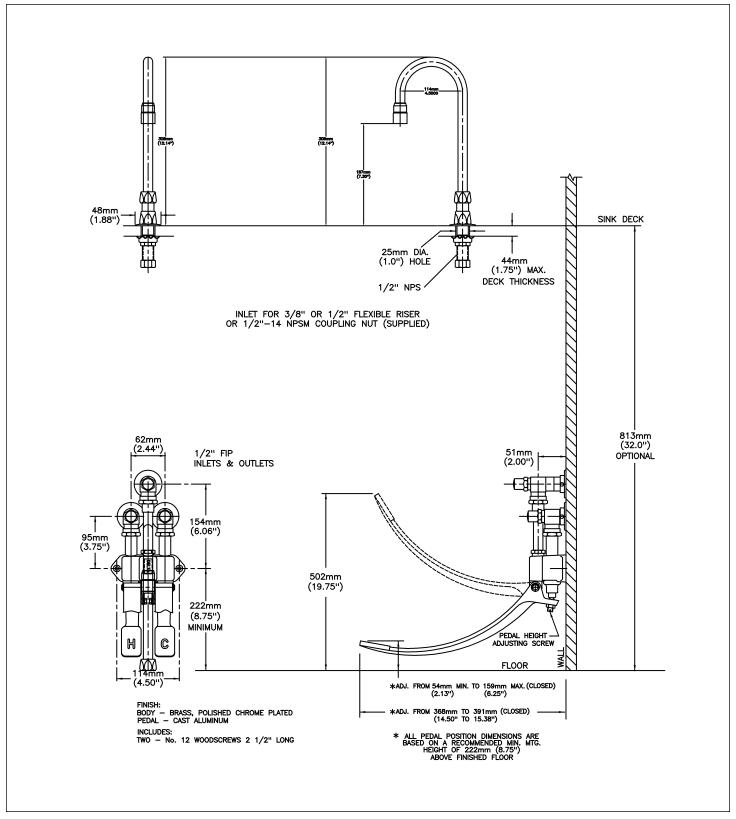

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 11, 2012.