

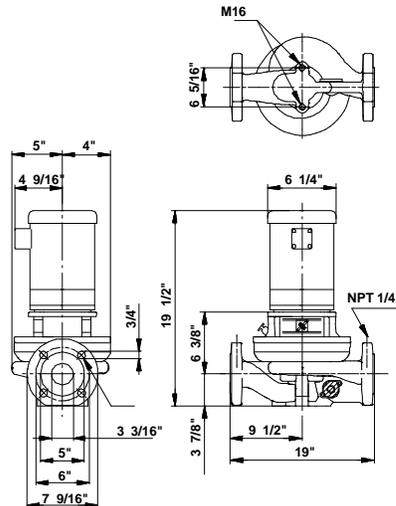


Position	Count	Description	Unit price
		<p>Electrical data:</p> <p>Motor type: Baldor, TEFC Number of poles: 4 Rated power - P2: 0.496 HP Main frequency: 60 Hz Rated voltage: 3 x 208-230/460 V Service factor: 1,25 Rated current: 2,1-2/1 A Starting current: 14,4-13/6,5 A Cos phi - power factor: 63 Rated speed: 1725 rpm Motor efficiency at full load: 74 % Insulation class (IEC 85): B</p> <p>Others:</p> <p>Net weight: 97.2 lb Gross weight: 106 lb Shipping volume: 4.98 ft³</p>	

Description	Value
Product name:	TP 80-40/4 U-G-A-BUBE U-G-A BUBE
Product Number:	96411824
EAN number:	5700390525163
Technical:	
Speed for pump data	1760 rpm
Rated flow:	119 US gpm
Rated head:	8.86 ft
Head max:	13.1 ft
Shaft seal:	BUBE
Maximum operating pressure	145 psi
Approvals on motor nameplate:	UL Recognized Component, CSA
Pump Number:	96405269
Pump version:	U
Materials:	
Pump housing:	Cast iron EN-JL1040 ASTM 25 B
Impeller:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Material code:	A
Installation:	
Maximum ambient temperature:	104 °F
Maximum operating pressure	145 psi
Flange standard:	ANSI
Connect code:	G
Pipe connection:	3"
Pressure stage:	125 Lb.
Liquid:	
Liquid temperature range	5 .. 284 °F
Density:	62.4 lb/ft³
Electrical data:	
Motor type:	Baldor, TEFC
Number of poles:	4
Rated power - P2:	0.496 HP
KVA code:	L
Main frequency:	60 Hz
Rated voltage:	3 x 208-230/460 V
Service factor:	1,25
Rated current:	2,1-2/1 A
Starting current	14,4-13/6,5 A
Load current:	2,5-2,4/1,2 A
Cos phi - power factor:	63
Rated speed:	1725 rpm
Motor efficiency at full load:	74 %
Insulation class (IEC 85):	B
Motor protection:	NONE
Motor Number:	85601002
Others:	
Net weight:	97.2 lb
Gross weight:	106 lb
Shipping volume:	4.98 ft³
Country code:	Namreg

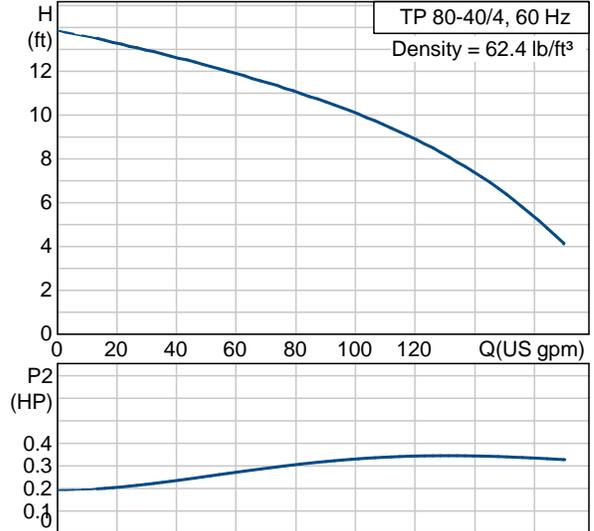

96411824 TP 80-40/4 60 Hz

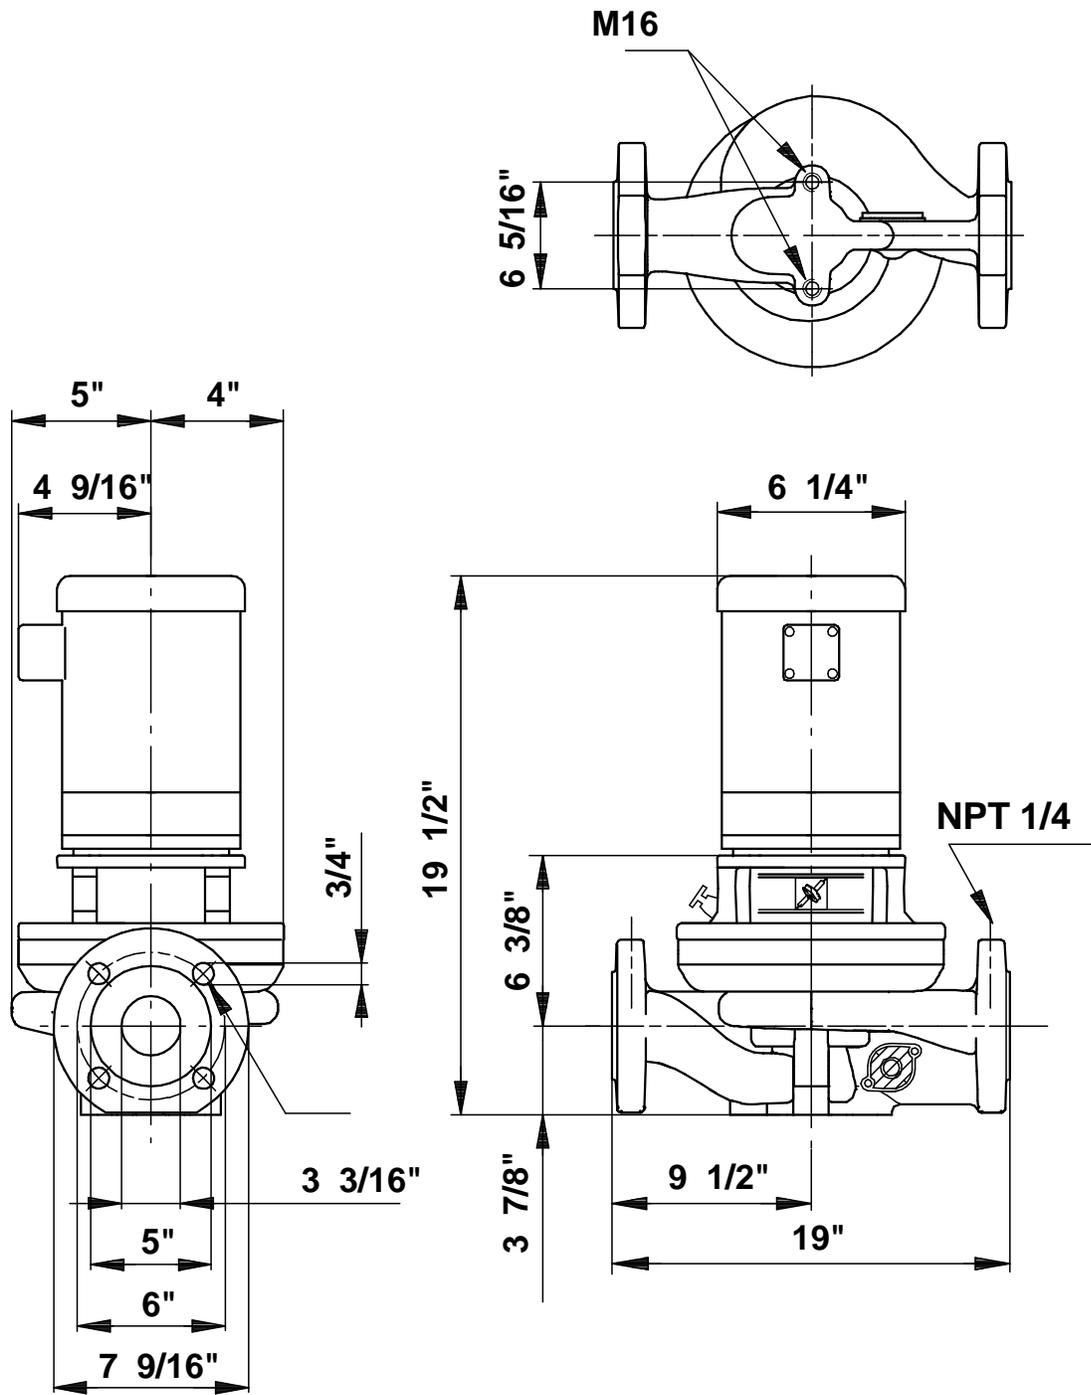

Note! All units are in [mm] unless others are stated.
 Disclaimer: This simplified dimensional drawing does not show all details.