

## Features \_\_\_\_\_

- 60" x 42" x 20-1/4" Oval whirlpool or bathtub
- Six powerful Ultra-Swirl jets
- Dual air knobs for total jet control
- Limited One-Year Warranty
- Available in Standard Colors: white, almond, biscuit and bone



### Options -

#### **Lift and Turn Drain**

Model #	Description	
PF1320	Polished Chrome	PLACE
PF1321	Everbrass (PVD)	
PF1322	Brushed Nickel	
PF1323	Oil Rubbed Bronze	

# Whirlpool Options \_\_\_\_\_

#### **Metal Trim**

Model # Description		Model #	Description		
PF1335	Polished Chrome				
PF1336	Everbrass (PVD)	999	SWP151	In-line Water Heater	
PF1337	Brushed Nickel	<b>6</b> 6			
PF1338	Oil Rubbed Bronze				







## **Specifications**

Model #	Description	Codes/Standards
6015	60" x 42" x 20-1/4" Oval Whirlpool	U P C USPC
6515	60" x 42" x 20-1/4" Oval Bathtub	® Intertek


Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	6
Construction	Self-contained, pre-plumbed whirlpool bath, mounted on a pre-leveled base	Water Capacity	42 gal. (min.) / 55 gal. (max.)
Blower Motor	120V, 60HZ, 5.8 Amp, Single Speed, Single Phase—Pre-mounted	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m <sup>2</sup> )
		Shipping Weight	whirlpool - 148 lbs.
Electrical Requirements	120V, 15 Amp, GFCI protected circuits		bathtub - 128 lbs.
On/Off Control	Air Switch	Warranty	Limited One Year

### **Technical Information**

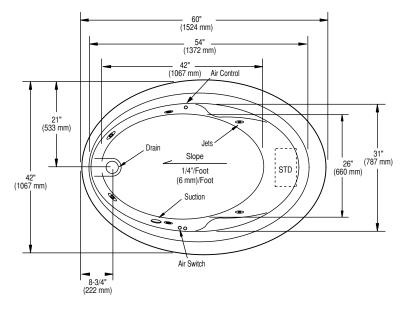



No apron available on this model.



Pump locations are shown for clarity. STD-standard pump location.

Installer Note: Due to the freeform nature of this tub shell, it is recommended that the tub be on the jobsite before making the final cut-out for drop-in installation.

Note: Measurements may vary 1/4" (+/-)

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

