

► Code Number

3072426

► Description

Exposed, Urinal Flushometer for 1¼" top spud urinals.

► Flush Cycle

3.5 gpf/13.2 lpf

► Specifications

Quiet, Exposed, Piston Type, Chrome Plated Urinal Flushometer with the following features:

Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation

ADA Compliant Metal Oscillating Non-Hold-Open Handle

Vacuum Breaker Flush Connection

Fixed Volume Piston with Filtered O-ring Bypass

Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance


Spud Coupling, Wall and Spud Flanges for 1¼" Top Spud

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Free Spinning Vandal Resistant Stop Cap

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories

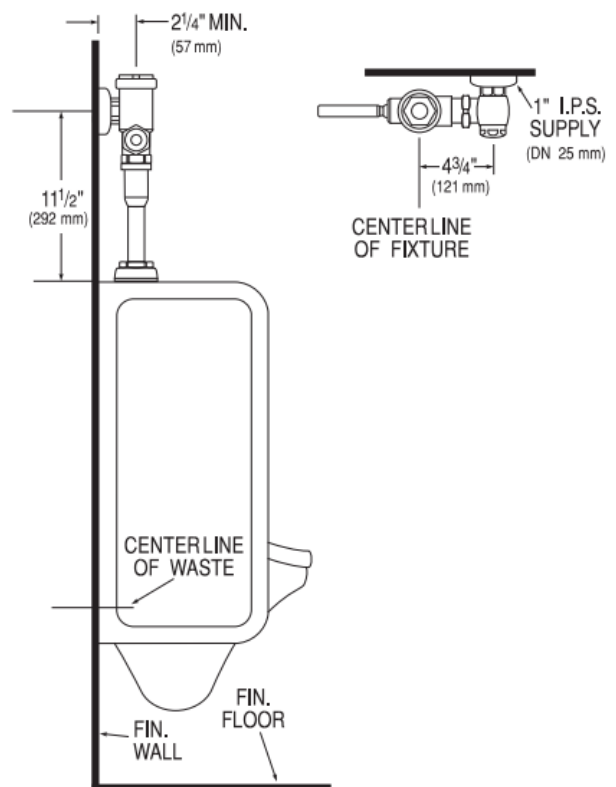

► Compliance & Certifications



This space for Architect/Engineer Approval