SPEAKMAN® SE-625

COMBINATION SHOWER & EYE/FACE WASH

DESCRIPTION

The SE-625 Safe-T-Zone® features the SE-490 eye/face wash with dual spray outlets, flip-top dust covers and stainless steel bowl combined on a stainless steel stanchion with an impeller action deluge showerhead which is activated by a stainless steel pull rod.

SPECIFICATIONS

Showerhead: 8" diameter stainless steel Flow Control: Internal 20 gpm regulator Valve: 1" NPT female stainless steel.

Full flow stay open ball valve

Activator: Stainless steel triangular pull rod Stanchion: 1½" stainless steel, 18 gauge tubing

Inlet & Waste: 1¹/₄" NPT male Performance: 20 gpm @ 30 psi

Finish: Stainless steel
EYE/FACE WASH: SE-490
Bowl: 300 series stainless steel

Spray Heads: (2) yellow plastic spray

outlets with flip-top dust caps

Valve: 1/2" NPT female stainless steel


full flow stay open ball valve

Activator: Stainless steel push handle Performance: 3.8 gpm @ 30 psi Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

■ 30GPM	ougpm regulator
\square FLW	Flow switch
\square FPV	Freeze protection valve
☐ HFO	Hand/Foot operation
\square HS	Hand-held spray
\square PSS	Polished stainless steel finish
\square SPV	Scald protection valve
\square TS	Top supply

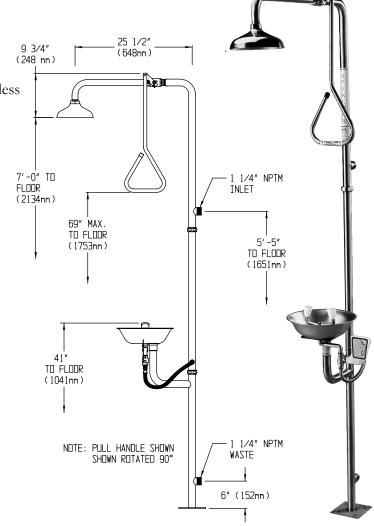

Job Name
Location
Architect/Engineer
Sales Representative
Wholesaler
Date Model #