

HYDAPIPE®

Surface Mounted Shower System

- 1-901S-FSB: Through wall piping configuration with soap dish
- 1-901-FSB: Through wall piping configuration less soap dish

Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Wall/hand shower with flexible 5' metal hose with in-line vacuum breaker, wall connection and flange. 30" slide bar for hand shower mounting. Attached soap dish and sloped metal top cap. Stainless steel covering to be 18 gauge with #4 brush finish.

Modifications:

Valve:

- Suffix 21: Single supply, manual shut off, 4 arm handle
- Suffix 22: Single supply, manual shut off, lever handle
- Suffix 60: Single supply, metering shut off (not ADA compliant)
- Suffix 56: Pressure Balance and metering combination

Soap dish:

- Suffix RS: Recessed soap dish
- Suffix CWM: Wall mounted cake soap dish


Hand spray accessories:

- Suffix FS: Hand spray, hose and wall hook (in lieu of Suffix FSB)
- Suffix OD: Quick disconnect for hand spray units
- Suffix R: White vinyl hose in lieu of metal hose

Seat and Grab bars*:

- Suffix HC1: Slat seat and two wall grab bar (right hand)
- Suffix HC2: Slat seat and two wall grab bar (left hand)
- Suffix HC3: Padded seat and two wall grab bar (right hand)
- Suffix HC4: Padded seat and two wall grab bar (left hand)

*ADA requirements state that the seat shall be located opposite the controls. This will require the construction of a partial wall, or use of a reinforced partition for mounting the folding seat. Construction of a partial wall or reinforced partition to be provided by others.

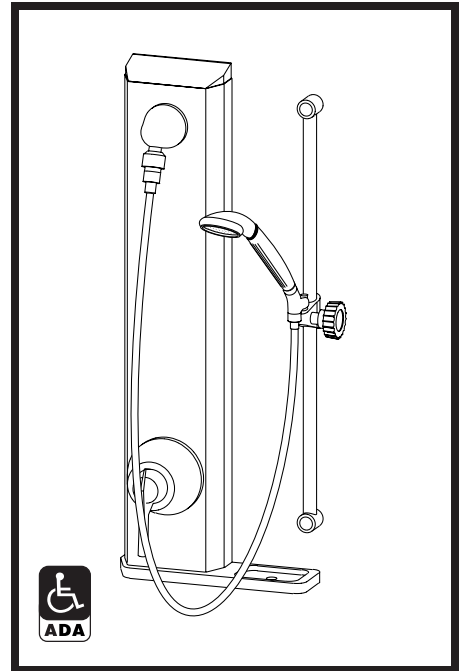

**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

Job/Location

.....
.....

Engineer

.....
.....

Contractor

.....
.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.