

Location:



Shower-Hand Shower System 3505-H321-V-CYL Specification Submittal



Feature Highlights


- Symmons Shower-Hand Shower System with cylinder (CYL) style lever handles
- Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Separate dual outlet diverter valve, #4-458E-BODY
- Showerhead, single mode #352SH
- Showerhead mounting bracket and flange
- Wall/hand shower, single mode with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- 30 inch slide bar for mounting hand shower
- Standard flow rate is 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictor available
- Polished chrome finish (standard)

Model Numbers

- 3505-H321-V-CYL
Shower-Hand Shower System with Symmons Temptrol® mixing valve p/n 4000-BODY and dual outlet diverter p/n 4-458E-BODY
- 3505-H321-V-CYL-TRM
Trim only, valve and diverter must be ordered separately
- 4000-BODY
Symmons Temptrol® mixing valve without trim
- 4000-X-BODY
Symmons Temptrol® mixing valve without trim, valve includes integral service stops to allow water shut-off for service
- 4-458E-BODY
Symmons dual outlet diverter valve without trim

Handle Options / Modifications

Append appropriate -suffix to model number



- LR Lever handle
- LP Loop style lever handle

Options / Modifications

Append appropriate -suffix to model number

- IPS IPS connections: 1/2 inch female IPS connections on Temptrol® mixing valve
- X Service Stops: Temptrol® mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY (Option applies when ordering model 3505-H321-V-CYL)
- CHKS Check Stops: Temptrol® mixing valve includes integral check stops.
(Requires integral service stop option -X) Used in installations where a positive shut-off device is used downstream of mixing valve
- REV Reverse core: Temptrol® mixing valve with reverse core. *(Requires integral service stop option -X)* Used in back-to-back system installations. HOT on the right, COLD on the left
- ETCH Escutcheon with black & white lettering
- B Metal escutcheon
- 2.0 Flow rate restrictor, 2.0 gpm (7.6 L/min)
- 1.5 Flow rate restrictor, 1.5 gpm (5.7 L/min)
- 352SH-3 Showerhead is three-mode in place of standard single mode
- L/HD Showerhead not included, Mounting bracket and flange is included
- L/HS Hand Shower wand not included Includes hose, in-line vacuum breaker, wall connections and flange only
- R Vinyl hose in place of flexible metal hose
- 72 6 foot hand shower hose in place of 5 foot
- QD Quick-disconnect on hand shower
- B48 48 inch slide bar in place of standard 30 inch

Finish Options / Modifications

Append appropriate -suffix to model number

- Polish chrome (standard finish)


Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- 5 years - for commercial installations

Dimensions Shower-Hand Shower System, 3505-H321-V-CYL

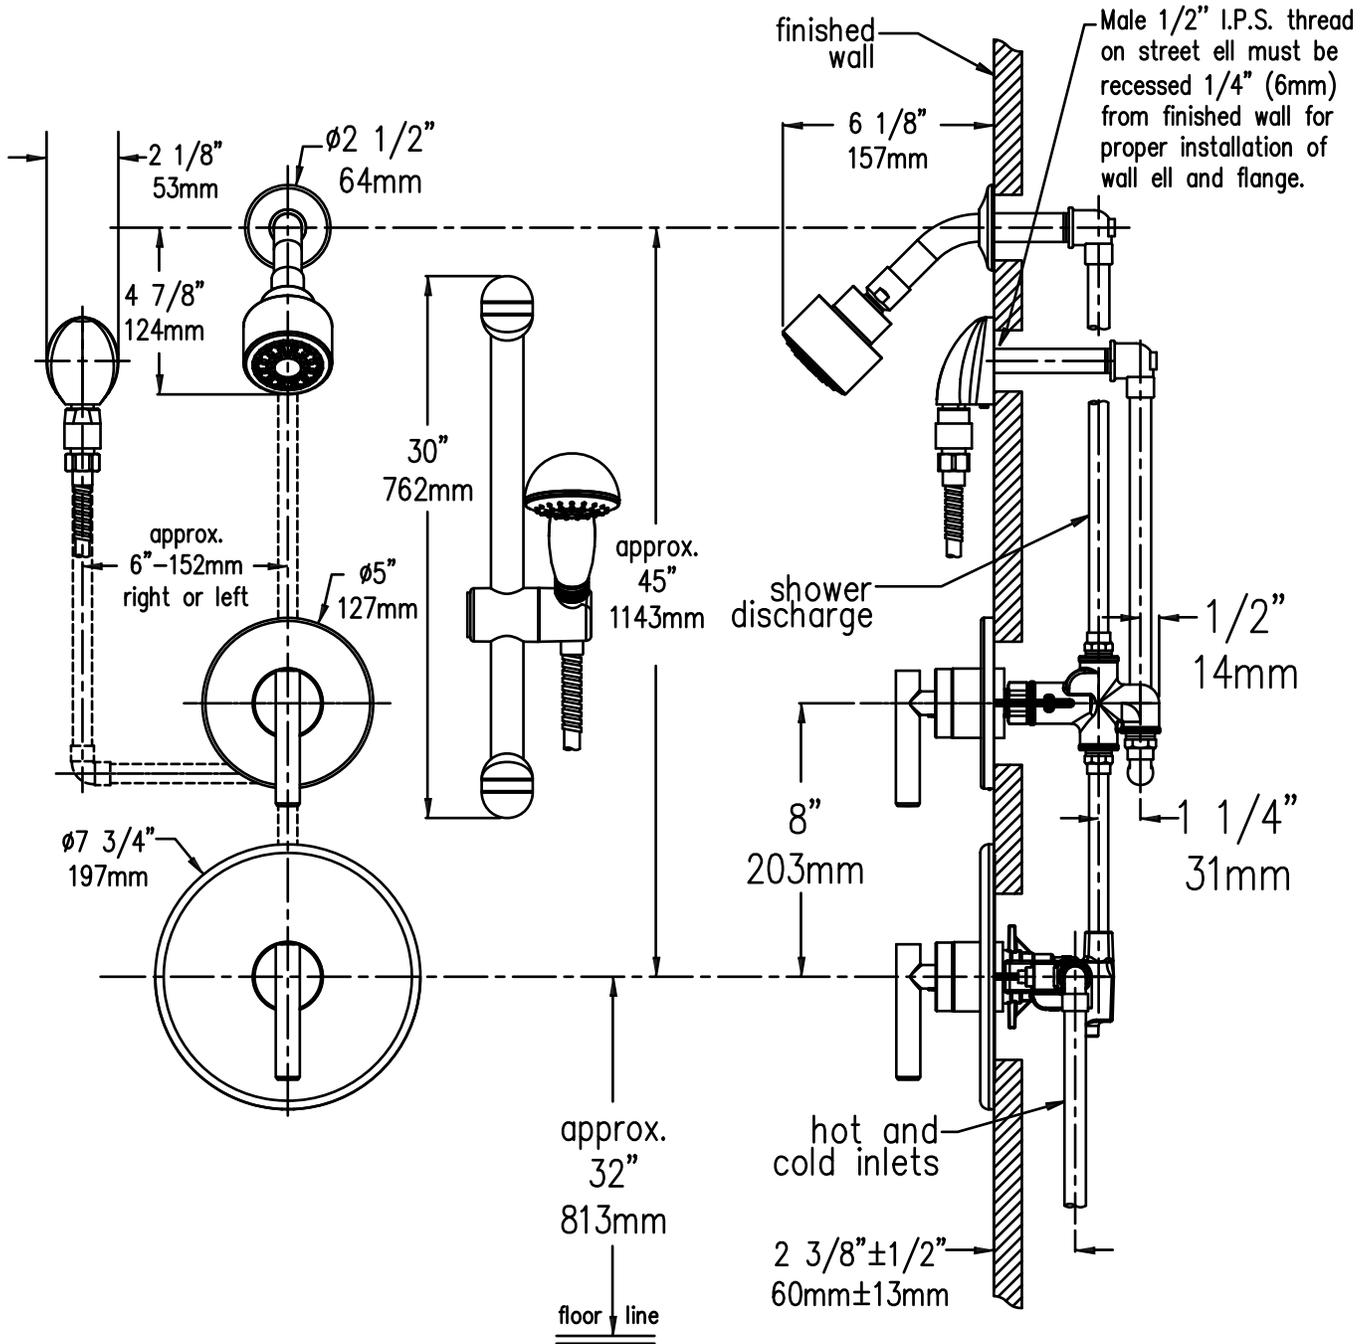

Note: Dimensions subject to change without notice