


Location:



# Tub-Shower & Hand Shower System 3506-H321-V-CYL Specification Submittal



## Feature Highlights


- Symmons Tub-Shower & Hand Shower System with cylindrical (CYL) style lever handles
- Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Separate dual outlet diverter valve, #4-458E
- Showerhead, single mode #352SH
- Showerhead mounting bracket and flange
- Wall/hand shower, two modes, #352HS with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- 30 inch slide bar for mounting hand shower
- Standard flow rate is 2.5 gpm (9.5 L/min)  
*Optional lower flow rate restrictor available*
- Tub spout with diverter, #054
- Polished chrome finish (standard)

## Model Numbers

- 3506-H321-V-CYL  
Tub-Shower and Hand Shower System with Symmons Temptrol® mixing valve p/n 4000-BODY and dual outlet diverter p/n 4-458E-BODY
- 3506-H321-V-CYL-TRM  
Trim only, valve and diverter must be ordered separately
- 4000-BODY  
Symmons Temptrol® mixing valve without trim
- 4000-X-BODY  
Symmons Temptrol® mixing valve without trim. Valve includes integral service stops to allow water shut-off for service
- 4-458E-BODY  
Symmons dual outlet diverter valve without trim

## Handle Options / Modifications

Append appropriate -suffix to model number



- LR Lever handle
- LP Loop style lever handle

## Options / Modifications

Append appropriate -suffix to model number

- IPS IPS connections: 1/2 inch female IPS connections on Temptrol® mixing valve
- X Service Stops: Temptrol® mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY (Option applies when ordering model 3506-H321-V-CYL)
- CHKS Check Stops: Temptrol® mixing valve includes integral check stops  
Note: Requires integral service stop option (-X)  
*Used in installations where a positive shut-off device is used downstream of mixing valve*
- REV Reverse core: Temptrol® mixing valve with reverse core. *Used in back-to-back system installations. HOT on the right, COLD on the left*
- ETCH Escutcheon with black & white lettering
- B Metal escutcheon
- 2.0 Flow rate restrictor, 2.0 gpm (7.6 L/min)
- 1.5 Flow rate restrictor, 1.5 gpm (5.7 L/min)
- 352SH-3 Showerhead is three-mode in place of standard single mode
- L/HD Showerhead not included, Mounting bracket and flange are included
- L/HS Hand Shower wand not included, Includes hose, in-line vacuum breaker, wall connections and flange only
- R Vinyl hose in place of flexible metal hose
- 6 6 foot hand shower hose in place of 5 foot hose
- QD Quick-disconnect on hand shower
- B48 48 inch slide bar in place of standard 30 inch

## Finish Options / Modifications

Append appropriate -suffix to model number

- Polish chrome (standard finish)


## Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

## Warranty

- 5 years - for commercial installations

# Dimensions *Tub-Shower & Hand Shower System, 3506-H321-V-CYL*

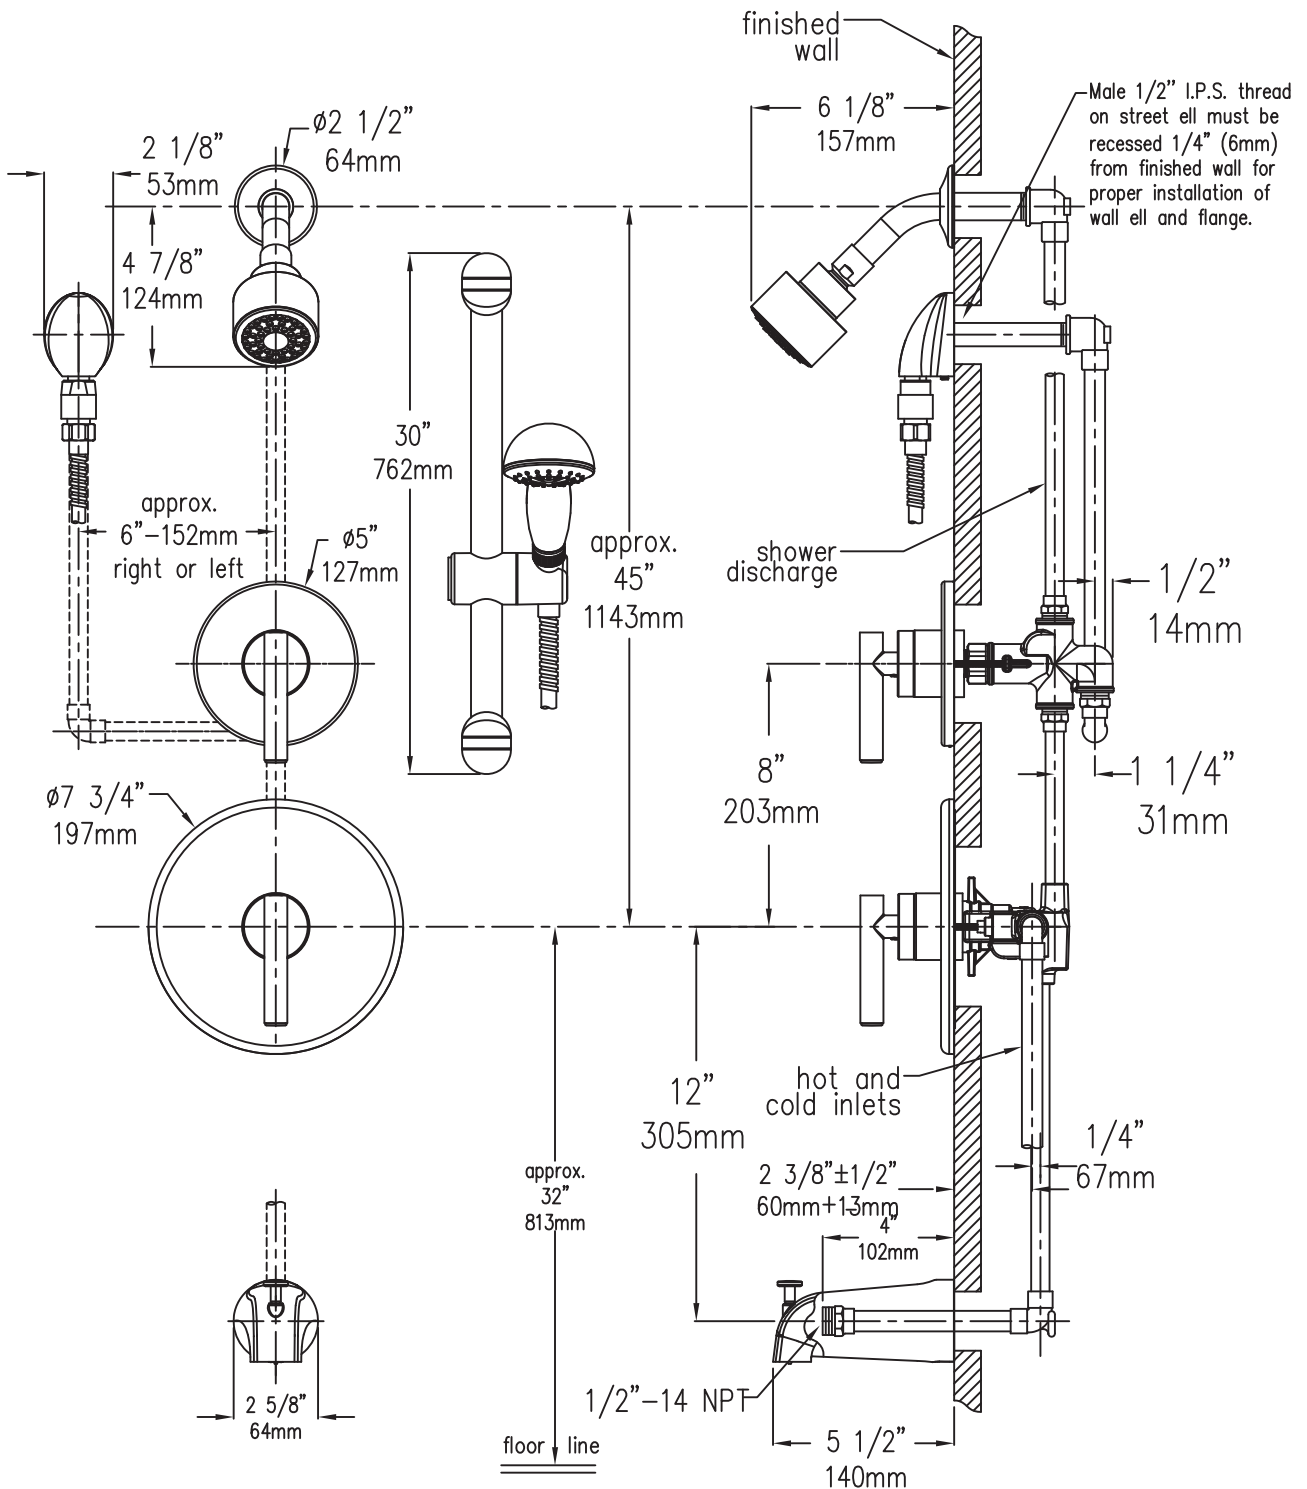

**Note:** Dimensions subject to change without notice

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 664-1300  
 Website: [www.symmons.com](http://www.symmons.com) ■ Email: [customerservice@symmons.com](mailto:customerservice@symmons.com)

© 2010 Symmons Industries, Inc. Printed in U.S.A. ■ ZV-861 ■ 120210

