


4-228 Symmons® Clear-Flo Shower Head

Symmons Clear-Flo shower head with adjustable spray and standard ball joint connection. Polished chrome finish. 2.5 gpm (9.5 L/min) flow rate.

Modifications:

- Suffix M:** Male thread connection (1/2" MIPs)
- Suffix 2.0:** 2.0 gpm (7.8 L/min) flow rate
- Suffix 1.5:** 1.5 gpm (5.7 L/min) flow rate
- Suffix VP:** Vandal resistant
- Suffix BRS:** Radiance® polished brass finish
- Suffix STN:** Satin finish
- Suffix PCB:** Polished chrome with Radiance® polished brass accent

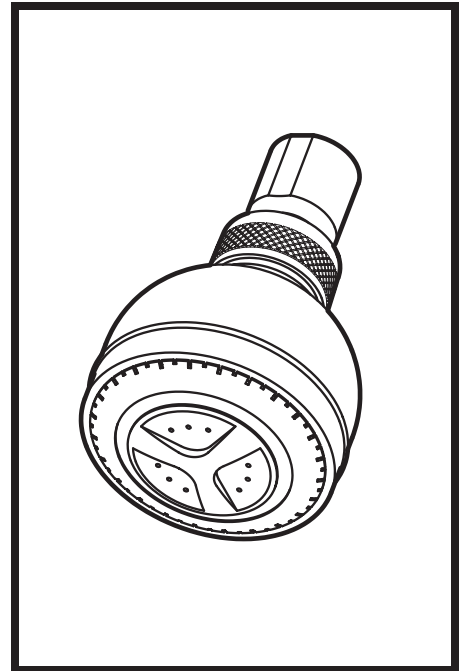

**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

Job/Location

.....
.....

Engineer

.....
.....

Contractor

.....
.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
(800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
Website: www.symmons.com ■ Email: customerservice@symmons.com

©2003, 2008 Symmons Industries, Inc. Printed in U.S.A. ■ 042808

