




SYMMONS® Sereno™

Hand Shower System 4303

Specification Submittal

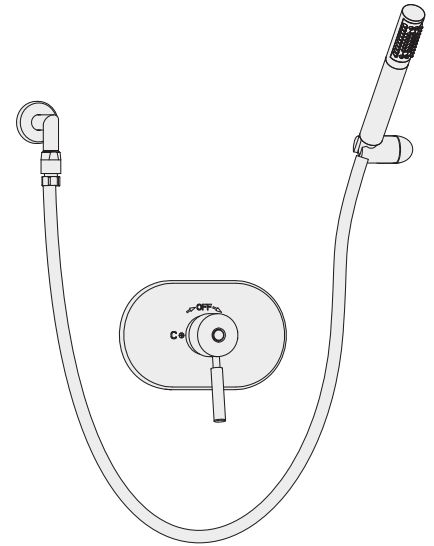

Feature Highlights

- Symmons hand shower system with lever handles.
 - Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
 - Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
 - Flow rate 2.5 gpm (9.5 L/min)
 - Metal construction with polished chrome finish
-

Model Numbers

- 4303Hand Shower System with Symmons Temptrol® pressure balancing mixing valve p/n 4000-BODY
 - 4303-TRMTrim only, valve must be ordered separately
 - 4000-BODY Symmons Temptrol® pressure balancing mixing valve without trim
 - 4000-X-BODY ...Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shut-off for service.
-

Finish Options

Append appropriate -suffix to model number.

- STN Satin nickel finish

Options / Modifications

Append appropriate -suffix to model number.

- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
 - X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 4303.)
-

Standards / Certifications


ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Dimensions *Sereno Hand Shower System, 4303*

Female 1/2" NPT thread must be recessed 7/8" (22mm) min. 2" (51mm) max. from finished wall for proper installation of mitered wall ell and flange.

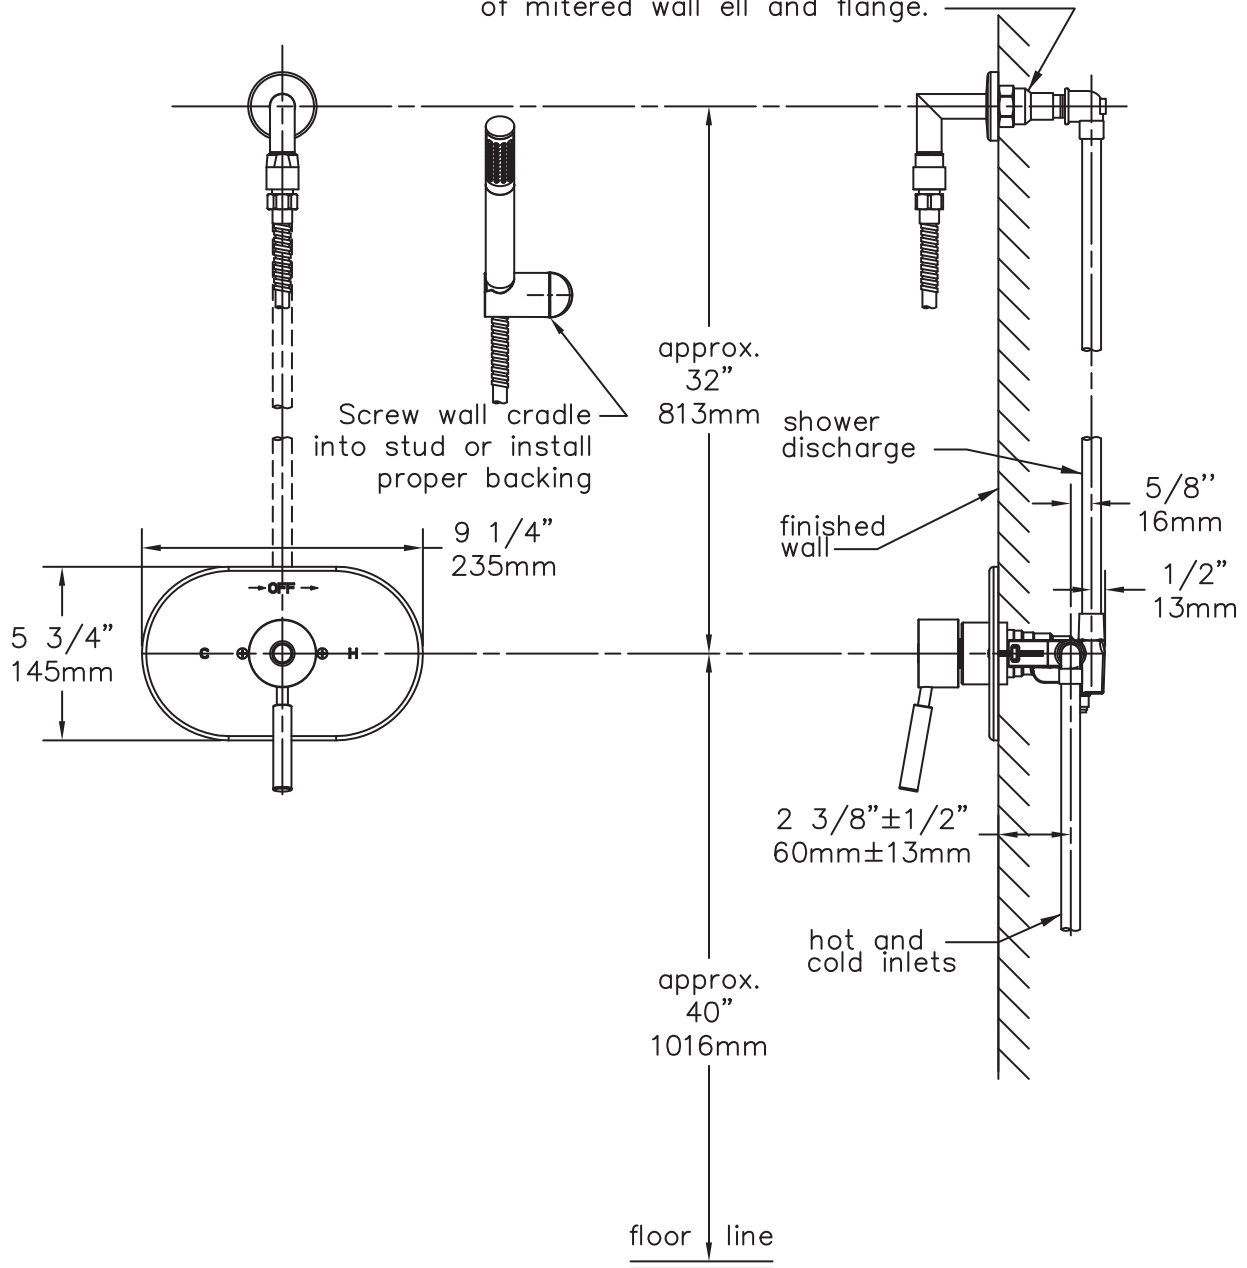

Note: Dimensions subject to change without notice.