


Shower System with Hand Shower 4305 **Specification Submittal**

305





Feature Highlights

- Symmons Shower System with Hand Shower
- Symmons Temptrol[®] pressure balancing mixing valve with adjustable stop screw to limit handle turn
- Separate dual outlet lever diverter valve
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Shower head with mounting bracket
- Flow rate 2.5 gpm (9.5 L/min) for both shower head and hand shower
- Metal construction with polished chrome finish

Model Numbers

4305	Shower System with Hand Shower and Temptrol® mixing valve p/n 4000-BODY and dual outlet diverter p/n 4-458E-BODY
4305-TRM	Trim only, valve and diverter mus be ordered separately
4000-BODY	Symmons Temptrol® mixing valve without trim
4000-X-BODY	Symmons Temptrol® mixing valve without trim. Valve includes integral service stops to allow water shut-off for service.
4-458E-BODY	Symmons dual outlet diverter valve without trim

Finish Options

Append appropriate -suffix to model number

□ STN Satin nickel finish

Options / Modifications

Append appropriate -suffix to model number


- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- -X Symmons Temptrol® mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 4305.)
- ☐ -2.0 2.0 (7.6 L/min) Flow rate restrictor
- ☐ -1.5 1.5 (5.7 L/min) Flow rate restrictor

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime to the original end purchaser in consumer installations.
- 5 years for commercial installations

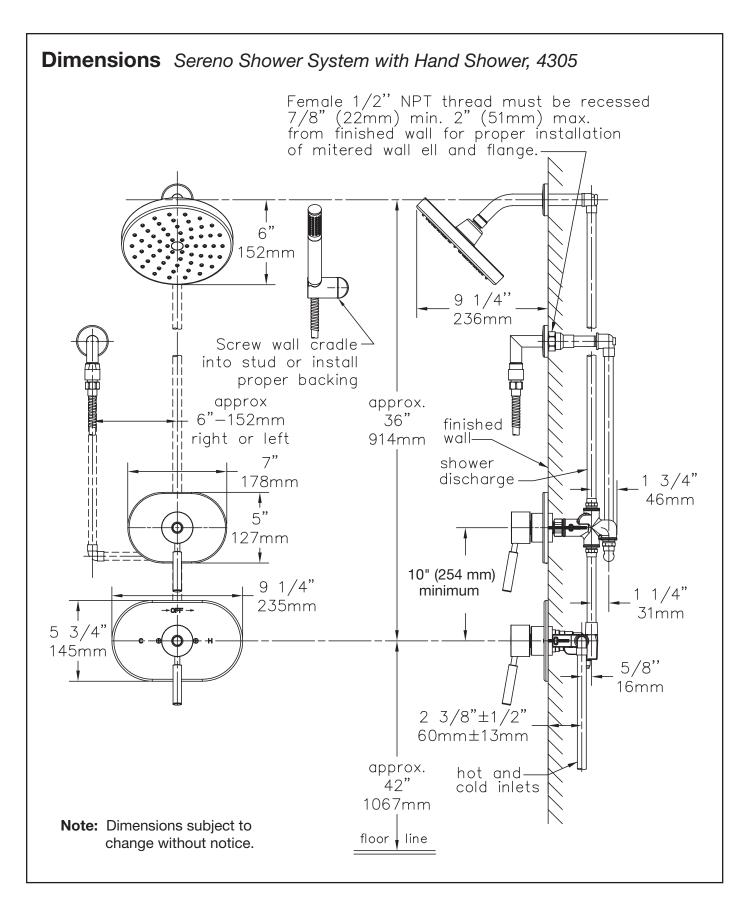

Symmons Industries, Inc. = 31 Brooks Drive = Braintree, MA 02184 (800) 796-6667, (781) 848-2250 = Fax (800) 961-9621, (781) 664-1300 Website: www.symmons.com = Email: customerservice@symmons.com

