
SYMMONS® Deluxe Temptrol™

Tub-Shower System, DS-96-2-LR-OP Specification Submittal







Feature Highlights

- Symmons tub and shower system with lever handle.
- Symmons Temptrol[®] pressure balancing mixing valve with integral diverter and adjustable stop screw to limit handle turn.
- Clear-flo single mode Showerhead, 4-228
- Showerhead mounting arm and flange
- Standard flow rate 2.5 gpm (9.5 L/min)
- Tub spout
- Polished chrome finish (standard)

Model Numbers

Ш	DS-96-2-LR-OP	Symmons Shower system with
		Temptrol® pressure balancing mixing valve,

Options / Modifications

Append appropriate -suffix to model number.

- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- ☐ -X Symmons Temptrol® pressure balancing mixing valve also includes integral service stops to allow water shut-off for service,
- -L/HD Showerhead is not included. Includes mounting arm and flange only.
- □ -2.0 2.0 (7.6 L/min) Flow rate restrictor
- ☐ -1.5 1.5 (5.7 L/min) Flow rate restrictor

Finish Options / Modifications

Append appropriate -suffix to model number.


- ☐ -STN Satin nickel
 - Polished chrome (standard finish)

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime to the original end purchaser in consumer installations.
- 5 years for commercial installations

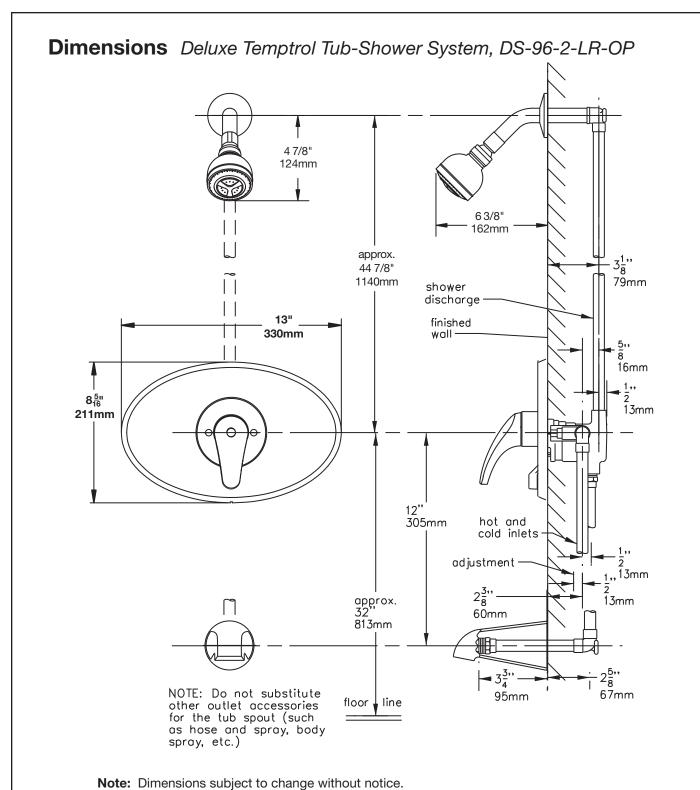

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 664-1300 Website: www.symmons.com • Email: customerservice@symmons.com

