

## Silas™ Widespread Lavatory Faucet

### FEATURES

- WaterSense certified low-flow 1.5 gpm faucet
- Lever handles
- Solid brass construction
- Ceramic disk valve cartridge
- Accommodates 6" -12" spread
- Metal pop-up drain assembly included



### COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

### CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB1953, Vermont S.152 & Maryland HB. 372, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant



### PRODUCT SPECIFICATION



The widespread lavatory faucet shall have a maximum flow rate of 1.5 gpm (5.7 lpm). Product shall have lever handles. Product shall have a solid brass construction. Product shall have a ceramic disk valve cartridge. Product shall accommodate 6" -12" spread. Product shall include metal pop-up drain assembly. Product shall be TOTO Model TL210DD#\_\_\_\_\_.

# TL210DD

## Silas™ Widespread Lavatory Faucet

### SPECIFICATIONS

- Warranty: Lifetime Limited Warranty (Residential Use)  
One Year (Commercial Use)
- Material: Brass
- Shipping Dimensions: 13-1/2" L x 7-1/2" W x 4-3/4" H
- Shipping Weight: 8.6 lbs.
- Maximum Flow Rate: 1.5 gpm (5.7 lpm)

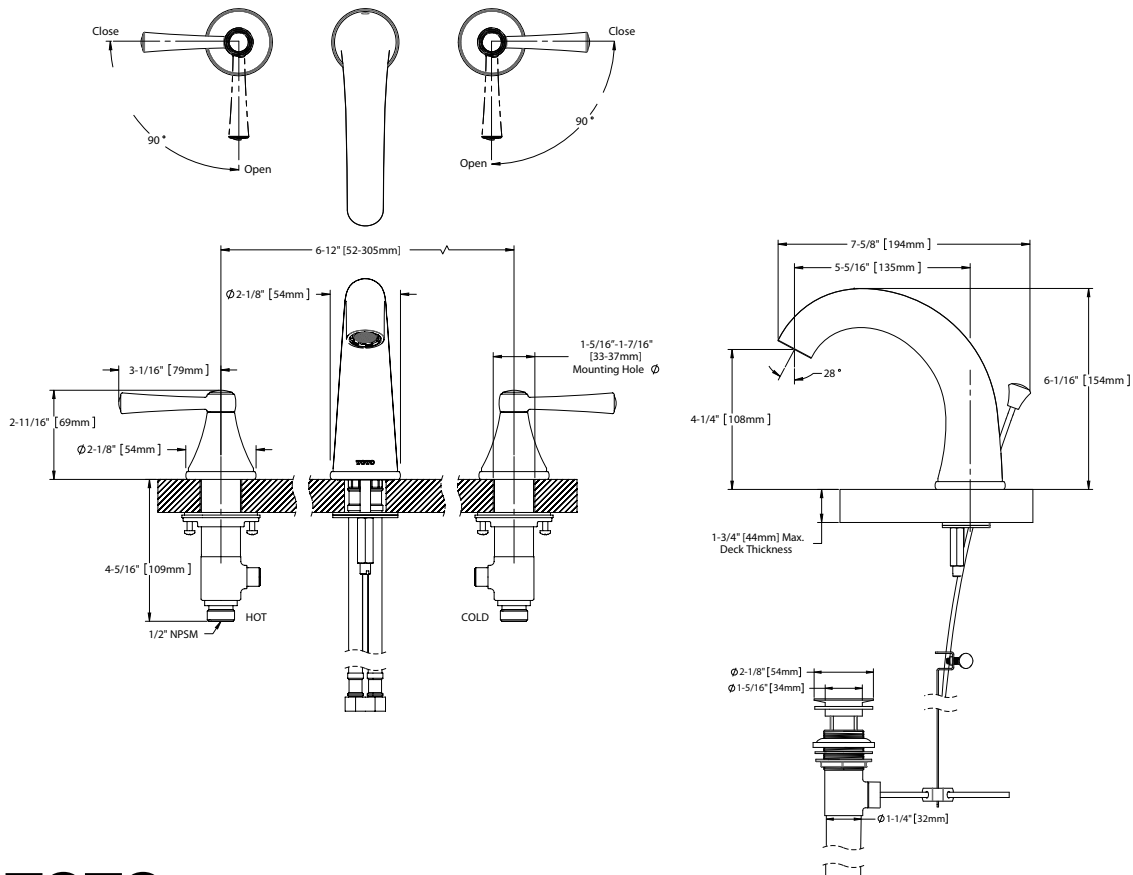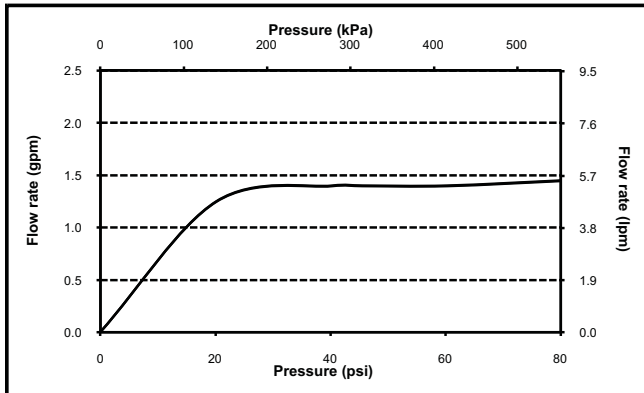

**TOTO**®

*These dimensions and specifications are subject to change without notice*