

Traditional II

Roman Tub without Hand Shower

UF65400
UF65403
UF65405




Installation/Installation/Instalación


CUSTOMER SERVICE
TOLL-FREE 1-888-OK-ULTRA (658-5872)




Tools You Will Need / Outils dont vous aurez besoin / Herramientas necesarias



Adjustable Wrench
Clé à molette
Llave ajustable



Phillips Screwdriver
Tournevis cruciforme
Destornillador cruciforme



Groove join pliers
Pince multiprise
Pinzas ajustables

SAFETY TIPS


- If you use soldering for the installation of the faucet, the seats, cartridges and washers will have to be removed before using flame. Otherwise, warranty will be void on those parts.
- Cover your drain to avoid losing parts.
- 0°C~55°C.

CONSIGNES DE SÉCURITÉ


- Si vous posez le robinet par brasage, il est essentiel de retirer les sièges, les cartouches et les rondelles avant d'appliquer la flamme, faute de quoi la garantie sur ces pièces sera annulée.
- Couvrez le drain pour ne pas perdre des pièces.
- 0°C~55°C.

CONSEJOS DE SEGURIDAD


- En el caso de utilizar soldadura para instalar el grifo, remueva los asientos, cartuchos y arandelas antes de usar la llama. De lo contrario, se anulará la garantía para esos componentes.
- Tape la boca del desagüe para prevenir la pérdida de piezas pequeñas.
- 0°C~55°C.

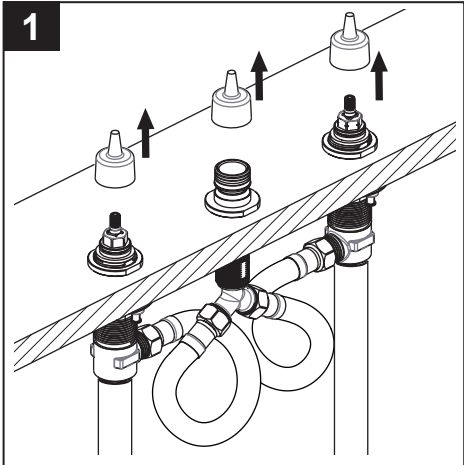


Remove the mud guards from the spout nipple assembly, the hot and cold valves.

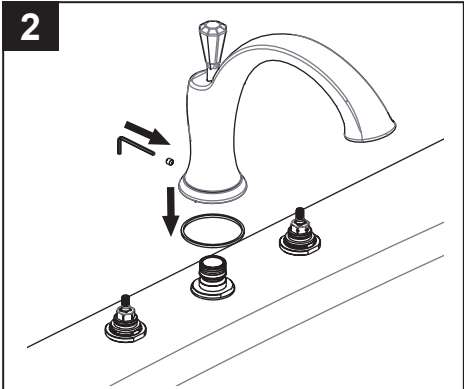


Place the spout washer under the spout and install spout on spout nipple assembly. Be sure the spout is firmly resting on the deck and secure the spout. Secure the spout with the setscrew.

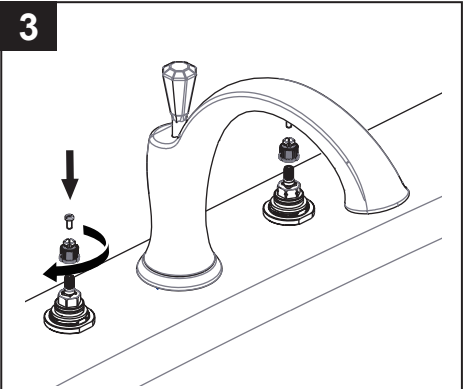


Insert the bush and screw into the hot valve. Secure the assembly by turning the screw clockwise. Repeat for cold valve.

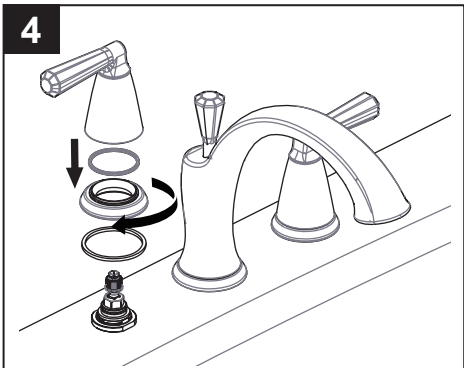


Place the washer over the hot valve. Align the handle and place the handle and escutcheon assembly into the valve. Secure the assembly by turning the escutcheon clockwise. Repeat for cold valve.

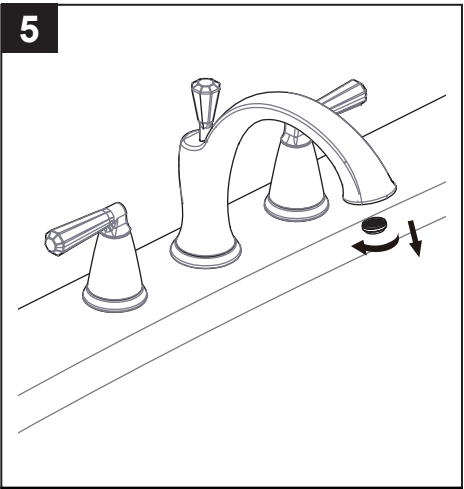


Remove the aerator with tool. Turn water supply on.

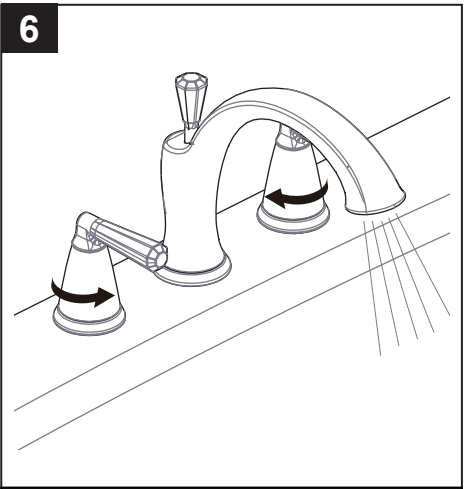

Turn the faucet handles on full for one minute to flush debris.

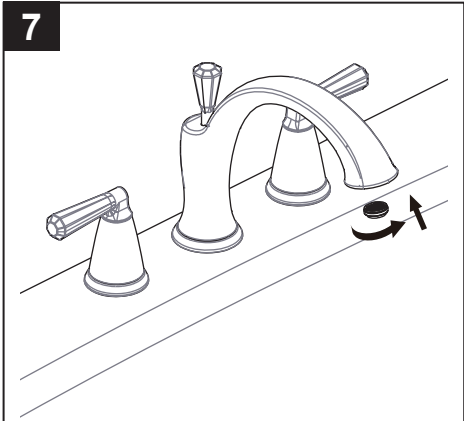


Re-install the aerator with tool.

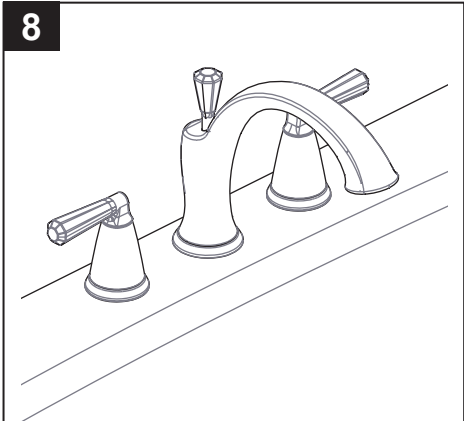

Installation complete.

NO.	Description	Part No.
1	Set Screw & Allen Key	9Q1350NT
2	Handle	5C0001500CP0
3	Bush & Screw Assembly	9Q224700PL
4	Base Assembly	9Q224800CP/AP/HA
5	Base Assembly	9Q224900CP/AP/HA
6	Aerator	5E0M0115PL

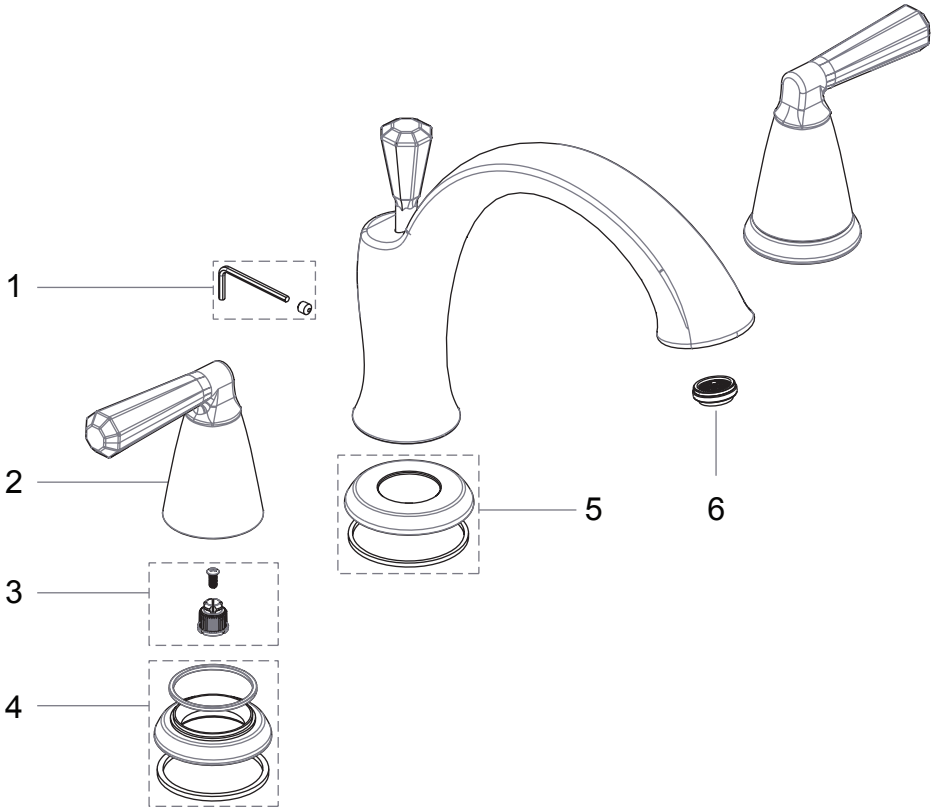

Limited Lifetime Warranty

Ultra Faucets warrants to the original purchaser that its products will be free from defects in workmanship and materials. All Ultra Faucets are provided with a life time limited warranty. This warranty does not cover any other labor or service charges associated with the removal, repair, or reinstallation of Ultra Faucets products. This express warranty does not apply to products that have been damaged as a result of misuse, abuse, negligence, accident, faulty installation or maintenance practices and/or used in any manner contrary to those recommended by the manufacturer.

Need help? Please call our toll-free customer service line at 1-888-658-5872 for additional assistance or service.
Besoin d'aide? Veuillez communiquer avec notre service à la clientèle au numéro gratuit 1-888-658-5872 pour tous renseignements ou services complémentaires.
¿Requiere asistencia? Llame a nuestro Servicio al Cliente, sin costo, al 1-888-658-5872 para asistencia adicional o servicio.