


Straight Couplings

One End Male National Pipe Thread

A.Y. McDonald Service Fittings are made in the United States of America and are manufactured to meet or exceed the AWWA C800 (latest revision) standard. Our service fittings are rated to withstand the same pressures as the tubing they are designed to fit. They are designed and tested for cold potable water only. EPDM rubber gaskets are used in our compression fittings.

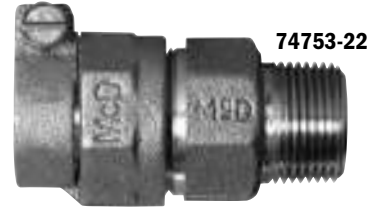

Size	Nut	MNPT	74753 Flare x MNPT	74753-22 -22 CTS Compression x MNPT	74753G G CTS Compression x MNPT	74753Q Q CTS Compression x MNPT	74753T T CTS Compression x MNPT
1/2"	1/2"	1/2"	●	●			
1/2" x 3/4"	1/2"	3/4"	●	●			
3/4"	3/4"	3/4"	●	●	●	●	●
3/4" x 1/2"	3/4"	1/2"	●	●	●	●	●
3/4" x 1"	3/4"	1"	●	●	●	●	●
1"	1"	1"	●	●	●	●	●
1" x 3/4"	1"	3/4"	●	●	●	●	●
1 1/4"	1 1/4"	1 1/4"	●	●	●	●	●
1 1/4" x 3/4"	1 1/4"	3/4"	●	●	●	●	●
1 1/4" x 1"	1 1/4"	1"	●	●	●	●	●
1 1/2"	1 1/2"	1 1/2"	●	●	●	●	●
1 1/2" x 1"	1 1/2"	1"	●	●	●	●	●
1 1/2" x 1 1/4"	1 1/2"	1 1/4"	●	●	●	●	●
2"	2"	2"	●	●	●	●	●
2" x 1 1/2"	2"	1 1/2"	●	●	●	●	●
2 1/2"	2 1/2"	2 1/2"	●	●	●	●	●

Size	Nut	MNPT	74753-33 -33 PEP Compression x MNPT	74753-3G -3G PEP Compression x MNPT	74753-3Q -3Q PEP Compression x MNPT	74753-44 -44 PVC Compression x MNPT	74753-55 -55 IP Compression x MNPT
1/2"	1/2"	1/2"				●	
1/2" x 3/4"	1/2"	3/4"				●	
3/4"	3/4"	3/4"	●	●	●	●	●
3/4" x 1"	3/4"	1"	●	●	●	●	●
1"	1"	1"	●	●	●	●	●
1" x 3/4"	1"	3/4"	●	●	●	●	●
1 1/4"	1 1/4"	1 1/4"	●	●	●	●	●
1 1/4" x 1"	1 1/4"	1"	●	●	●	●	●
1 1/4" x 1 1/2"	1 1/4"	1 1/2"	●	●	●	●	●
1 1/2"	1 1/2"	1 1/2"	●	●	●	●	●
1 1/2" x 1"	1 1/2"	1"	●	●	●	●	●
1 1/2" x 1 1/4"	1 1/2"	1 1/4"	●	●	●	●	●
2"	2"	2"	●	●	●	●	●
2" x 1"	2"	1"	●	●	●	●	●

Size	Nut	MNPT	74753-66 -66 Strong Lead Compression x MNPT	74753-67 -67 X Strong Lead Compression x MNPT	74753-68 -68 XX Strong Lead Compression x MNPT
1/2" x 3/4"	1/2"	3/4"		●	●
5/8" x 3/4"	5/8"	3/4"	●	●	●
3/4"	3/4"	3/4"	●	●	●
3/4" x 1"	3/4"	1"		●	●
1"	1"	1"	●	●	●
1 1/4"	1 1/4"	1 1/4"		●	●
1 1/4" x 1"	1 1/4"	1"		●	●
1 1/2"	1 1/2"	1 1/2"		●	●
2"	2"	2"		●	●

OPTIONS

- For Handyloc - Replace "Q" or "-3Q" with "H" or "-3H" in 3/4" & 1" only.
- For C903 tube - Replace "Q" with "K". On "Q" Series options only 3/4" x 1" only.
- For valve or fitting less flare nut add "L" to end of model number.
- CTS Anode (QA) & Flare Anode (A) - Replace "Q" with QA or add "A" to flare.
- Insert stiffeners are **required** on all flexible plastic connections. See page 23.
- See page 15 for Flare conversion adapters.