

SPECIFICATIONS

OPULENCE™ SINGLE HANDLE POT FILLER


Model

D205057

Description

- Ceramic disc valves at wall and at end of spout
- 2-piece articulated spout folds out of the way when not in use
- Swivel spout reach extends up to 22"
- Designed for cold water hook up
- Single hole wall mount
- 2.2gpm (8.3L/min) maximum flow rate @60 psi

Flow Rate

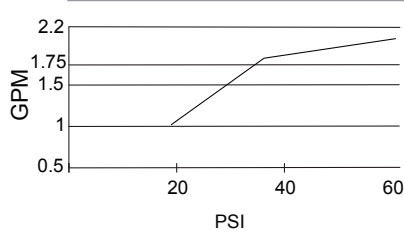

Standards



NSF/ANSI 372

- NSF/ANSI 372

MEETS ASME A112.18.1M/A112.18.1

- ASME A112.18.1M/A112.18.1




- ADA Accessibility Guidelines for Buildings and Facilities - 309.4 Operation for Operable Parts

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

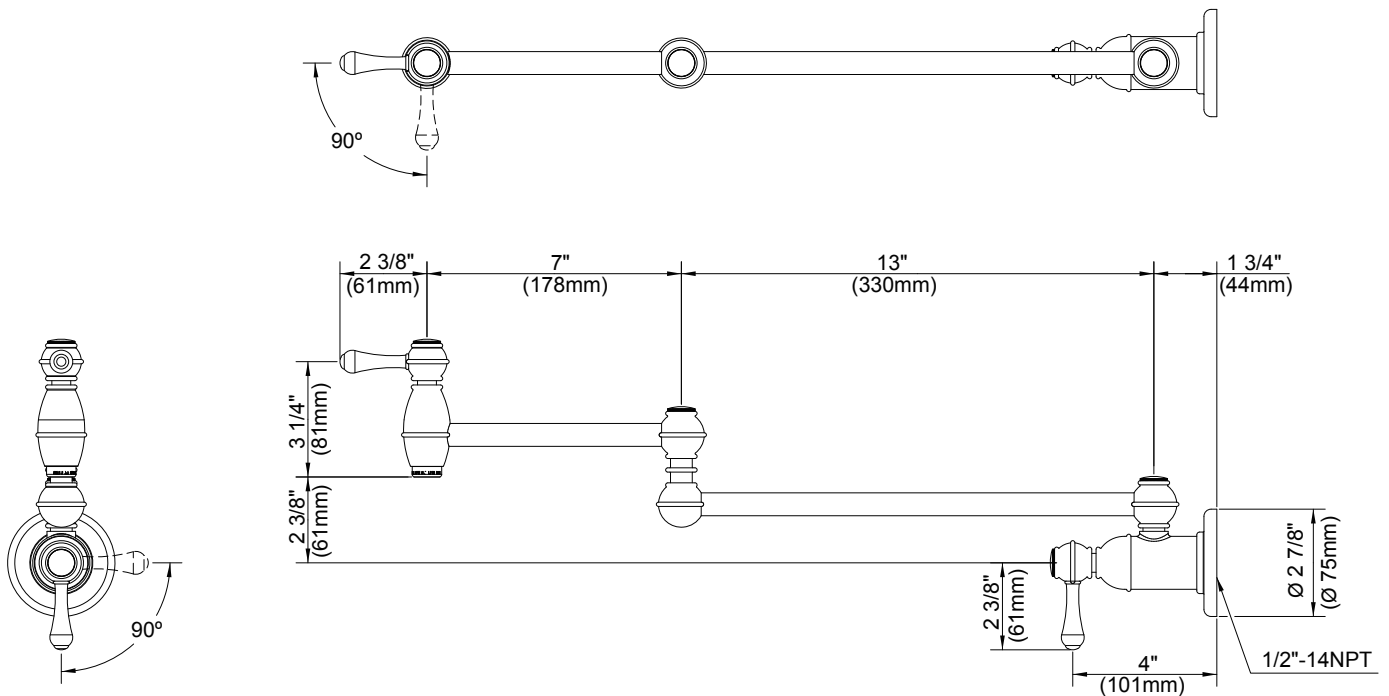

Submittal Information:

Job Name: _____
 Contractor: _____

Location: _____
 Contact #: _____