

## NEOREST® EW™ Wall-Hung Toilet, 1.28GPF & 0.9GPF

### FEATURES

#### NEOREST EW

- 3D Tornado Flush™ system, high efficiency
- CeFiONtect™ ceramic glaze - a highly smoothed surface for easier cleaning
- Dual Flush function (1.28 GPF/4.8 LPF and 0.9 GPF/3.4 LPF)
- Universal Height
- WASHLET® with three wash modes (front, rear, soft)
- Oscillating and pulsing comfort washing
- Auto lid open/close, auto flush
- Automatic air purifying system
- Adjustable heated seat
- Adjustable spray position
- Programmable energy saver system
- Back-up manual flush
- eWater+® - mists the bowl with electrolyzed water, reducing the need for harsh cleaning chemicals.
- Multifunctional remote control
- ADA compliant

#### NEOREST In-Wall Tank Unit

- Dual-Max® flushing system, high-efficiency (1.28 GPF/4.8 LPF & 0.9 GPF/3.4 LPF)
- Adjustable 15"-19" mounting height
- Supports up to 880lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper pipe supply line

### KIT COMPONENTS

- CT994CEFG#01  
Bowl Unit
- SN994M#01  
Top Unit
- WT174M  
NEOREST In-Wall Tank Unit (Copper Pipe)
- YT994#WH  
White Glass Push Plate

### COLORS/FINISHES

- Standard  
#01 Cotton



**3D Tornado Flush**



**WASHLET**



**CeFiONtect**



**ewater+**

### CODES/STANDARDS

- Meets and exceeds:
  - Bowl: ASME A112.4.2, ASME A112.19.2/CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
  - Carrier System: ASME A112.6.2
  - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, and others
- ADA compliant



# CWT994CEMFG

## NEOREST EW Wall-Hung Toilet, 1.28GPF & 0.9GPF

### PRODUCT SPECIFICATIONS

#### **CT994CEFG**

The NEOREST EW with the 3D Tornado Flush system toilet shall be 1.28 GPF/4.8 LPF and 0.9 GPF/3.4 LPF. Toilet shall have CeFiONtect ceramic glaze and be at Universal Height. Toilet shall be of skirted design with auto open and close seat. Toilet shall be TOTO Model CT994CEFG.

Water Use:	1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF)
Flush System:	3D Tornado Flush
Water Pressure:	Flowing: Min 7.25 PSI (0.05MPa) Static: Max 108.75 PSI (0.75 MPa)
Water Surface:	5-3/4" x 4"
Trap Diameter:	2" (53 mm)
Trap Seal:	2-1/16" (53 mm)
Warranty:	Three Year Limited (Residential) One Year Limited (Commercial)
Material:	Bowl: Vitreous china Seat + Cover: Urea-Resin
Shipping Weight:	81.6 lbs
Shipping Dimensions:	29-5/16" L x 18-1/16" W x 17-1/2" H

#### **SN994M**

Power Rating:	AC 120 V, 60 Hz, 1300 W
Power Cord:	1.2 m (3.94 ft)
Water Feature:	Adjustable Water Flow Rate
Rear Washing:	Approx. 0.07 - 0.11 gal/min
Soft Washing:	Approx. 0.08 - 0.11 gal/min
Front Washing:	Approx. 0.08 - 0.11 gal/min
Wide Front Washing:	Approx. 0.09 - 0.11 gal/min
Washing Spray Temperature:	Approx: 86°F - 104°F (30°C - 40°C)
Safety Feature:	Temperature Fuse
Drying Feature:	Air Temperature: Approx: 95°F - 140°F (35°C - 60°C)
Airflow Volume:	10.2 ft <sup>3</sup> /min
Safety Feature:	Temperature Fuse
Seat Warming Feature:	Surface Temperature: Approx: 82°F - 97°F (28°C - 36°C)
Seat Heater Capacity:	59 W
Safety Feature:	Thermal Fuse
Air Purifying Feature:	O <sub>2</sub> Deodorizer
Air Volume:	5.7 ft <sup>3</sup> /min
Ambient Temperature Range:	32°F/0°C to 104°F/40°C
Product Size:	16-7/10" W x 26-3/5" D x 20-9/10" L
Weight:	Net: 97 lbs.
Floor to Seat Height:	17 1/4" (438mm) Recommended
Shipping Weight:	26.5 lbs
Shipping Dimensions:	31-1/4" L x 19-9/16" W x 8-7/8" H

#### **WT174M**


This universal height, high-efficiency, dual flushing, in-wall tank unit toilet shall be 1.28GPF & 0.9GPF. Requires TOTO toilet model CT994CEFG. In-Wall tank system shall be TOTO Model WT174M.

Water Use:	1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF)
Flush System:	Dual-Max <sup>®</sup>
Min Water Pressure:	7.25 PSI (Flowing)
Installation Height:	15" - 19"
Warranty:	One Year Limited
Material:	Various
Shipping Weight:	43 lbs
Shipping Dimensions:	47-1/2" L x 26" W x 6" H

#### **Installation Note**

- Adequate structural bracing is required

#### **INCORRECT INSTALLATION**

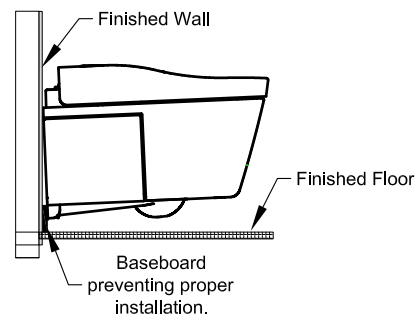


# CWT994CEMFG

## NEOREST EW Wall-Hung Toilet, 1.28GPF & 0.9GPF

### PRODUCT DIMENSIONS


#### CT994CEFG/SN994M

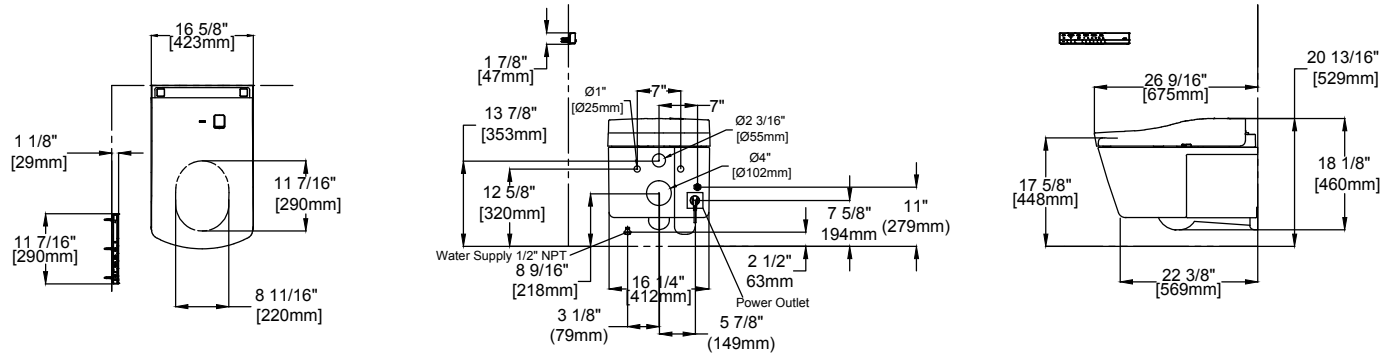

#### WT174M

\*Refer to Installation Manual on the specific Carrier height for the desired height of the toilet

**Frame work**  
Follow wall framing code around the Carrier

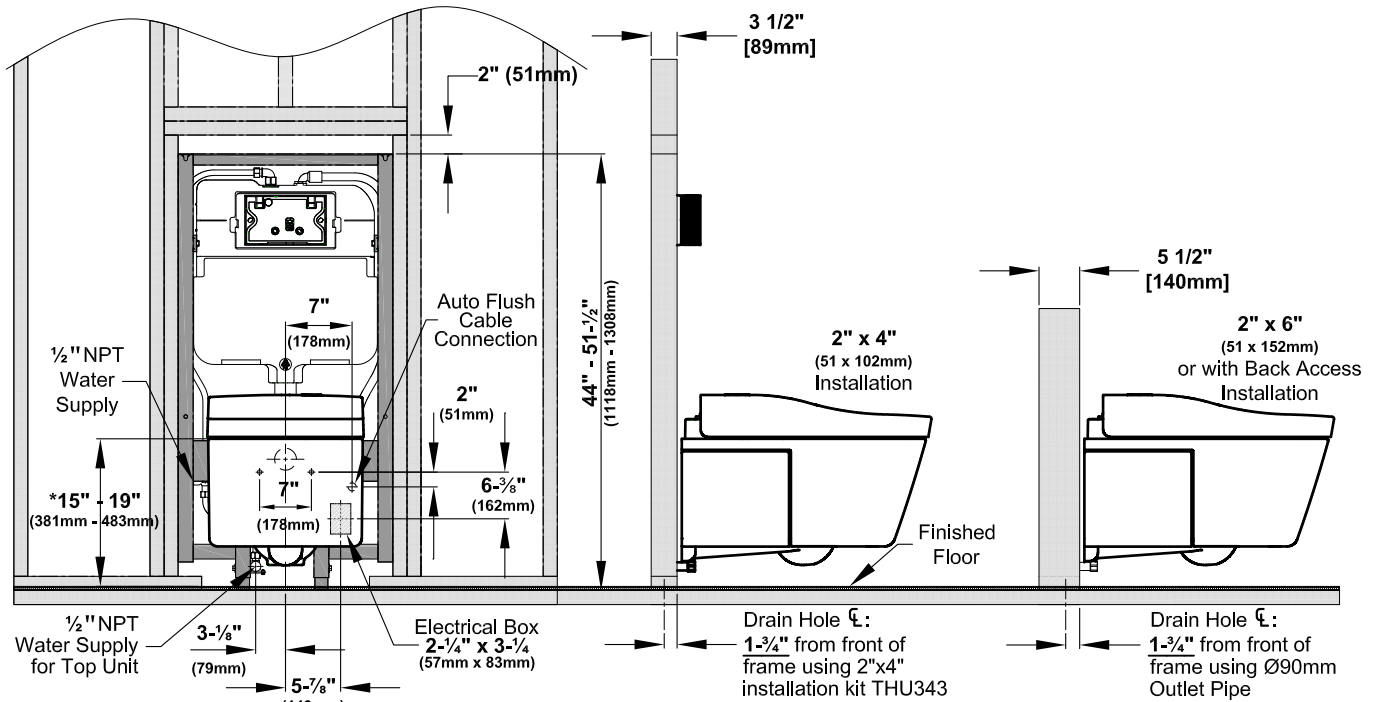

These dimensions and specifications are subject to change without notice