
TAG:


Deck Mounting Mixing Faucet

Architect/Engineering Specifications:

Single hole deck mount mixing faucet, compression cartridges with spring checks, lever handles and 18" flexible stainless steel supply hoses w/ 1/2" NPSM / 5/8" compresstion connections . Certified to ASME A12.18.1/CSA B125.1, NSF 61- Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name	
Model Specified	Quantity
Variations Specified	
Date	

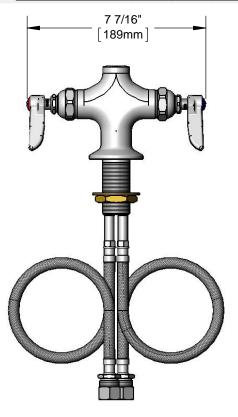





Features & Benefits:

- Single hole deck mount mixing faucet w/ Polished chrome plated brass body
- Eterna compression cartridges with spring checks to prevent the cross flow of water
- Lever handles
- Ø 1 1/8" inlet shank
- 18" flexible stainless steel supply hoses w/ 1/2" NPSM / 5/8" compresstion connections
- 3/8" NPT female outlet will accept all T&S rigid risers and nozzle
- Material: Chrome plated brass

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi Temperature: 40°F - 140°F Flow Rate: 8.10 GPM @ 60 psi

(Outlet Device &/or Final Configuration May Reduce Flow Rate)















