

SPECIFICATIONS

PRINCE™ TWO HANDLE WIDESPREAD LAVATORY FAUCET

Model

D304010

Description

- · Ceramic disc valves
- 3 3/4" spout length, laminar flow
- · Metal touch down drain assembly
- 3 hole mount, 6" 12" installation
- Flow rate: 1.5 gpm @ 60 psi

Standards




- UPC/cUPC
- NSF 61-9
- Energy Policy Act of 1992



ASME A112.18.1



Meets CA AB-1953





 ADA Accessibility Guidelines for Buildings and Facilities -4.27.4 Controls and Mechanisms

PSI 20 40 60 80 PSI 20 40 Certified by

IAPMO R&T





Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

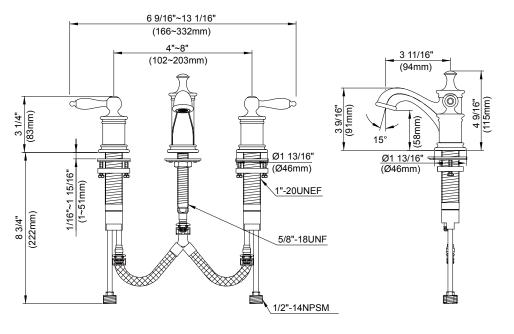



Submittal Information:	
Job Name:	Location:
Contractor	Contact #: