



◆ To pull nozzle riser up:



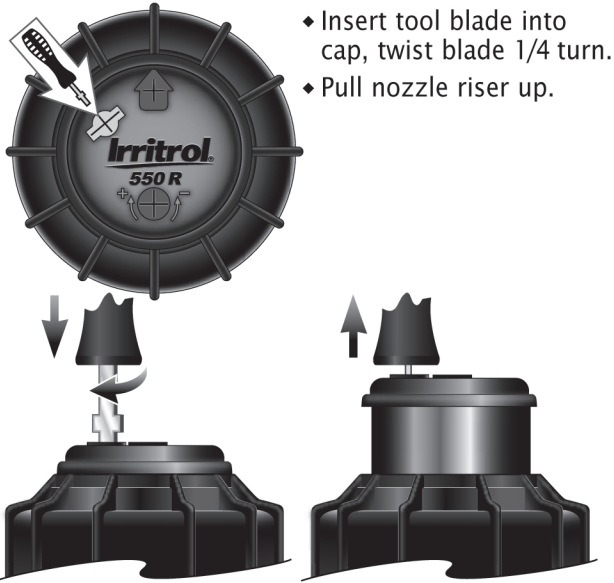


◆ To change nozzle/diffuse spray:

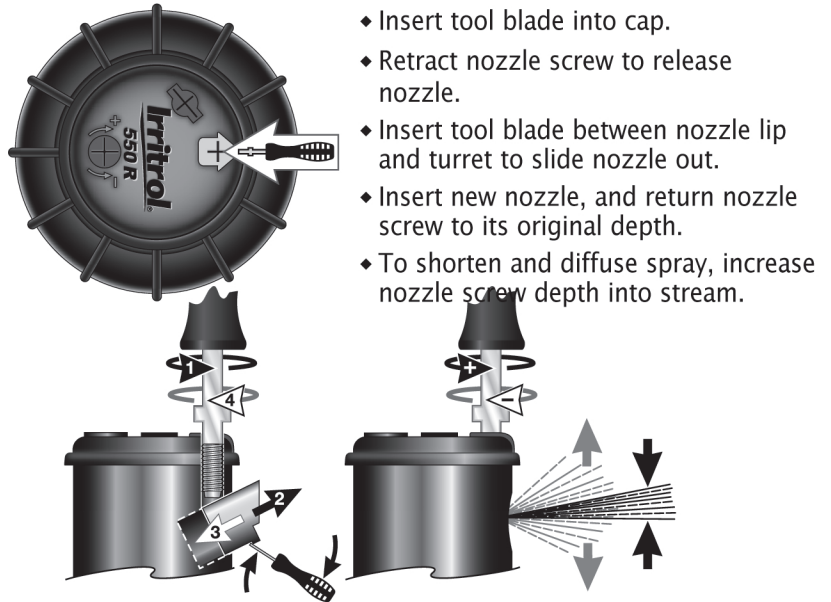

◆ To adjust spray arc:

- ◆ Turn nozzle turret (in the direction of free travel) to view left and right arc stops. The left stop is fixed and aligned to the left border by turning the sprinkler. The right stop is adjustable from 40°-360°.
 - ◆ To adjust the right stop, insert tool blade into cap. Turn blade left to decrease arc; right to increase arc.
- Note:** One full turn of tool blade adjusts arc 90°.

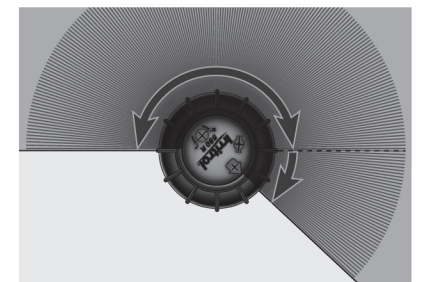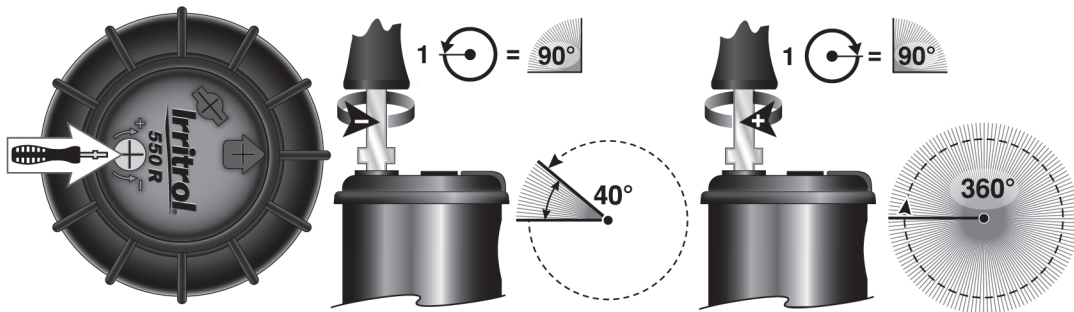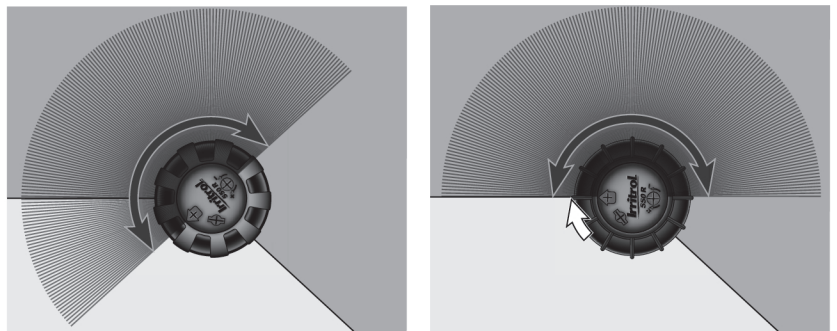

Example: Right stop increased to match right border.

◆ Nozzle Performance

U.S. Charts
Pressure - psi
Radius - Feet
Flow - GPM
Precip. Rate - in./hr.

Metric Charts
Pressure - Bar
Radius - Meters
Flow 1- m³/hr.
Flow 2- LPM
Precip. Rate - mm/hr.

Note: Precipitation rate based on 50% diameter, 1/2-circle operation.

◆ Standard Angle - U.S.

Nozzle	Press.	Rad.	Flow	Precip.	Precip.
1.5	25	33	1.15	0.20	0.23
	35	34	1.38	0.23	0.27
	45	35	1.59	0.25	0.29
	55	35	1.74	0.27	0.32
65	36	1.88	0.28	0.32	
2.0	25	35	1.45	0.23	0.26
	35	36	1.80	0.27	0.31
	45	37	2.12	0.30	0.34
	55	37	2.30	0.32	0.37
65	37	2.58	0.36	0.42	
2.5	25	35	1.75	0.28	0.32
	35	36	2.20	0.33	0.38
	45	37	2.55	0.36	0.41
	55	37	2.80	0.39	0.45
65	37	3.05	0.43	0.50	
3.0	25	36	2.20	0.33	0.38
	35	38	2.60	0.35	0.40
	45	40	3.05	0.37	0.42
	55	40	3.52	0.42	0.49
65	40	3.80	0.46	0.53	
4.0	25	37	2.95	0.41	0.48
	35	40	3.55	0.43	0.49
	45	42	4.10	0.45	0.52
	55	42	4.45	0.49	0.56
65	43	4.85	0.50	0.58	
5.0	25	39	3.75	0.47	0.55
	35	41	4.50	0.52	0.60
	45	43	5.10	0.53	0.61
	55	45	5.75	0.55	0.63
65	45	6.10	0.58	0.67	
6.0	25	39	4.20	0.53	0.61
	35	43	5.20	0.54	0.63
	45	44	6.05	0.60	0.69
	55	47	6.65	0.58	0.67
65	48	7.25	0.61	0.70	
8.0	25	36	5.75	0.85	0.99
	35	43	7.10	0.74	0.85
	45	47	8.05	0.70	0.81
	55	48	8.95	0.75	0.86
65	50	9.70	0.75	0.86	

◆ Standard Angle - Metric

Nozzle	Press.	Rad.	Flow 1	Flow 2	Precip.	Precip.
1.5	1.7	10.1	0.26	4.4	5	6
	2.0	10.2	0.29	4.8	6	6
	2.5	10.4	0.31	5.2	6	7
	3.0	10.7	0.36	6.0	6	7
	3.5	10.7	0.38	6.3	7	8
	4.0	10.8	0.41	6.9	7	8
4.5	11.0	0.43	7.1	7	8	
2.0	1.7	10.7	0.33	5.5	6	7
	2.0	10.8	0.37	6.2	6	7
	2.5	11.0	0.41	6.8	7	8
	3.0	11.3	0.48	8.0	8	9
	3.5	11.3	0.50	8.4	8	9
	4.0	11.3	0.55	9.2	9	10
4.5	11.3	0.59	9.8	9	11	
2.5	1.7	10.7	0.40	6.6	7	8
	2.0	10.8	0.45	7.5	8	9
	2.5	11.0	0.50	8.3	8	10
	3.0	11.3	0.58	9.7	9	11
	3.5	11.3	0.61	10.1	10	11
	4.0	11.3	0.66	11.1	10	12
4.5	11.3	0.69	11.5	11	13	
3.0	1.7	11.0	0.50	8.3	8	10
	2.0	11.3	0.55	9.1	9	10
	2.5	11.6	0.59	9.8	9	10
	3.0	12.2	0.69	11.5	9	11
	3.5	12.2	0.75	12.4	10	12
	4.0	12.2	0.83	13.9	11	13
4.5	12.2	0.86	14.4	12	13	
4.0	1.7	11.3	0.67	11.2	11	12
	2.0	11.7	0.74	12.3	11	12
	2.5	12.3	0.81	13.4	11	13
	3.0	12.8	0.93	15.5	11	13
	3.5	12.8	0.97	16.2	12	14
	4.0	13.0	1.06	17.6	13	15
4.5	13.1	1.10	18.4	13	15	
5.0	1.7	11.9	0.85	14.2	12	14
	2.0	12.2	0.94	15.6	13	15
	2.5	12.5	1.02	17.0	13	15
	3.0	13.1	1.16	19.3	13	16
	3.5	13.4	1.23	20.5	14	16
	4.0	13.7	1.35	22.4	14	17
4.5	13.7	1.39	23.1	15	17	
6.0	1.7	11.9	0.95	15.9	14	16
	2.0	12.5	1.07	17.8	14	16
	2.5	13.1	1.18	19.7	14	16
	3.0	13.4	1.37	22.9	15	18
	3.5	13.9	1.44	24.0	14	17
	4.0	14.5	1.58	26.3	15	17
4.5	14.6	1.65	27.4	15	18	
8.0	1.7	11.0	1.31	21.8	22	25
	2.0	12.0	1.46	24.3	20	23
	2.5	13.1	1.61	26.9	19	22
	3.0	14.3	1.83	30.5	18	21
	3.5	14.5	1.93	32.2	18	21
	4.0	14.9	2.12	35.3	19	22
4.5	15.2	2.20	36.7	19	22	

◆ Low Angle - U.S.

Nozzle	Press.	Rad.	Flow	Precip.	Precip.
1.0 LA	25	25	0.74	0.23	0.26
	35	28	0.94	0.23	0.27
	45	29	1.02	0.23	0.27
	55	29	1.14	0.26	0.30
	65	29	1.25	0.29	0.33
1.5 LA	25	27	1.10	0.29	0.34
	35	30	1.35	0.29	0.33
	45	31	1.52	0.30	0.35
	55	31	1.75	0.35	0.40
65	31	1.90	0.38	0.44	
2.0 LA	25	29	1.40	0.32	0.37
	35	31	1.72	0.34	0.40
	45	32	2.05	0.39	0.45
	55	33	2.25	0.40	0.46
65	33	2.45	0.43	0.50	
3.0 LA	25	29	2.20	0.50	0.58
	35	33	2.60	0.46	0.53
	45	34	3.05	0.51	0.59
	55	36	3.40	0.51	0.58
65	36	3.70	0.55	0.63	

◆ Low Angle - Metric

Nozzle	Press.	Rad.	Flow 1	Flow 2	Precip.	Precip.
1.0 LA	1.7	7.6	0.17	2.8	6	7
	2.0	8.1	0.19	3.2	6	7
	2.5	8.5	0.21	3.6	6	7
	3.0	8.8	0.23	3.9	6	7
	3.5	8.8	0.25	4.1	6	7
4.0	8.8	0.27	4.2	7	8	
4.5	8.8	0.28	4.7	7	8	
1.5 LA	1.7	8.2	0.25	4.2	8	9
	2.0	8.7	0.28	4.6	8	9
	2.5	9.1	0.31	5.1	7	8
	3.0	9.4	0.35	5.8	8	9
	3.5	9.4	0.37	6.2	8	10
4.0	9.4	0.41	6.9	9	11	
4.5	9.4	0.43	7.2	10	11	
2.0 LA	1.7	8.8	0.32	5.3	8	9
	2.0	9.1	0.35	5.9	8	10
	2.5	9.4	0.39	6.5	9	10
	3.0	9.8	0.47	7.8	10	11
	3.5	9.9	0.49	8.1	10	11
4.0	10.1	0.53	8.9	11	12	
4.5	10.1	0.56	9.3	11	13	
3.0 LA	1.7	8.8	0.50	8.3	13	15
	2.0	9.4	0.55	9.1	12	14
	2.5	10.1	0.59	9.8	12	13
	3.0	10.4	0.69	11.5	13	15
	3.5	10.7	0.73	12.2	13	15
4.0	11.0	0.81	13.4	13	15	
4.5	11.0	0.84	14.0	14	16	