

Buy it for looks. Buy it for life.®

DESCRIPTION

- · Brass construction
- 3/4" IPS connections

OPERATION

 Flow lever operates counterclockwise through a 90° arc with off at 6 o'clock and maximum flow at the 3 o'clock position.
Shut off in clockwise direction

CARTRIDGE

· Ceramic disc cartridge design

INSTALLATION

 Volume control valve must be installed with the arrow pointing in the water flow direction


STANDARDS

 Third party certified to meet CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including ASSE1016

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications




3/4" Volume Control Valve

Model: 3600

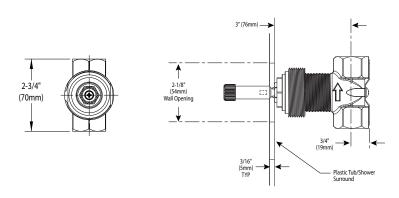

Thin Wall



Thick Wall

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com