

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

- · Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- Includes metal/50/50 pop-up type waste assembly where noted

OPERATION

- Acrylic knob style handle
- Tilt-on/ tilt-off
- Temperature controlled through 100° degree arc of handle travel

FLOW

• Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



CHATEAU®
Single-Handle Lavatory Faucet
with Metal Waste Assembly
Models: 4621 series


Bulk Pack (12 Per Carton): 64620 series

with 50/50 Waste Assembly
Bulk Pack (12 Per Carton): 64621 series

<u>Less Waste</u> Model: 4601 series

Bulk Pack (12 Per Carton): 64601 series

NOTE:THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

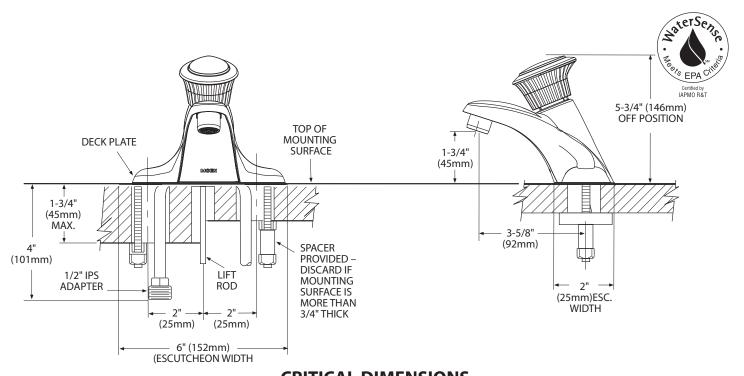

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



Specifications



CHATEAU® Single-Handle Lavatory Faucet with Metal Waste Assembly Models: 4621 series


Bulk Pack (12 Per Carton): 64620 series

with 50/50 Waste Assembly
Bulk Pack (12 Per Carton): 64621 series

<u>Less Waste</u> Model: 4601 series

Bulk Pack (12 Per Carton): 64601 series

NOTE:THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

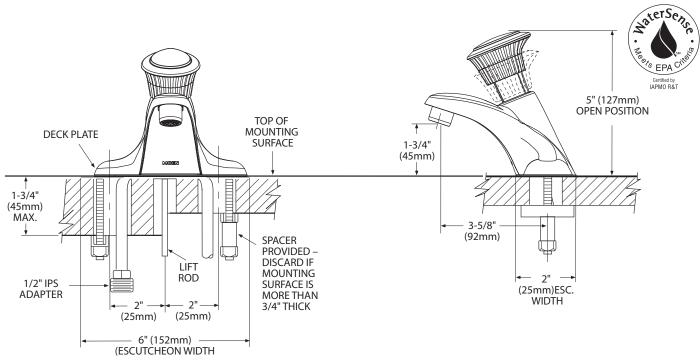

CRITICAL DIMENSIONS

(DO NOT SCALE)

DESCRIPTION

- · Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- Includes metal/50/50 pop-up type waste assembly where noted

OPERATION

- Knob style handle
- Pull-on/Push-off
- Temperature controlled through 180° degree arc of handle travel

FLOW

• Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi, for products made before October 2008 flow is limited to 2.2 gpm max (8.3 L/min)

CARTRIDGE

- · 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

STANDARDS

- Third party certified to WaterSense,® CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

WARRANTY

Rev. 10/10

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com