

Shower Rods Technical Specification

Shower Rod Sets – Exposed Screw

63-5

Stock Numbers:


- q **63-5 – 5' Aluminum Shower Rod Set**
Polished Chrome Finish
1" Diameter Smooth Rod
Exposed Screw Mounting
Fluted Flanges (63-F)
- q **63-5-SS – 5' Stainless Steel Shower Rod Set**
Satin Finish
1" Diameter Smooth Rod
Exposed Screw Mounting
Flanges (63-F)
- q **63-5-HD – 5' Heavy Duty Stainless Steel Shower Rod Set**
Satin Finish
1" Diameter Fluted Rod
Exposed Screw Mounting
Flanges (63-F-PB)

Materials:

Aluminum **Show Rods** are 28-gauge plated aluminum, and Stainless Steel **Show Rods** are stainless steel with triple plated polished chrome finish.

See Technical Specification for 63-F for information on the included flanges.

Dimensions:

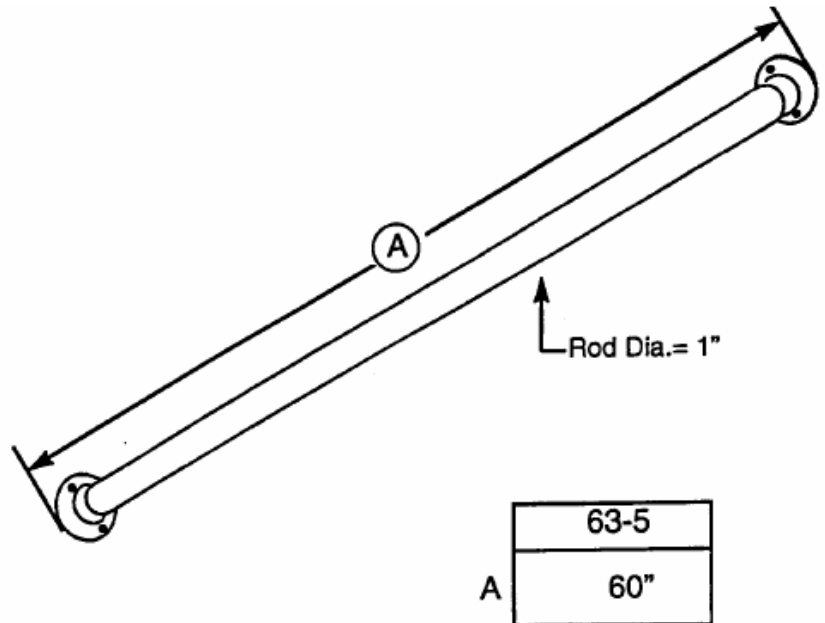

(For flange dimensions, see 63-F Technical Specification)

Installation Instructions:

1. Place flanges on both ends of shower rod.
2. Position rod assembly in desired location.
3. Mark location of mounting holes for both flanges.
4. Drill starter holes.
5. Attach left bracket to wall using 2" screws (provided).
6. Insert rod and right bracket assembly into left bracket.
7. Slide right bracket against wall and attach with 2" screws (provided).

Note: Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, the following optional fasteners are suggested: Tile/Masonry – Plastic or Lead Anchors; Plaster/Drywall – Toggle Bolts

Stock Number: _____ Shower Rod
By Creative Specialties



25300 AL MOEN DRIVE • NORTH OLMS TED, OH 44070
CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636
INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726
CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720
WWW.CSI.MOEN.COM

©Copyright Creative Specialties International 2006