




Submitted Model No.: Specific Features:



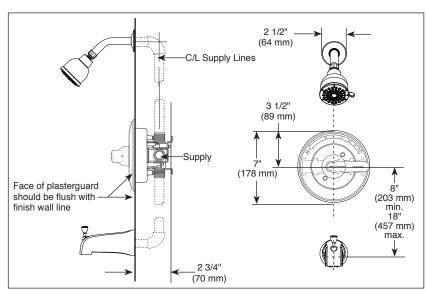











see what Delta can do

# TUB AND SHOWER **FAUCET TRIM**

- Foundations<sup>®</sup> Bath Collection
- Valve Only (BT13010 Series)
- Shower Only (BT13210 Series)
- Tub/Shower (BT13410 Series)

### **FEATURES:**

Monitor® 13 Series pressure balanced bath mixing valve trim

## STANDARD SPECIFICATIONS

- Maximum flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice<sup>®</sup> Universal rough valve body (R10000 Series)
- Back-to-back installation capability
- Solid brass forged body
- Temperature only controlled with handle
- Field adjustable means to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- 1/2" -14 threaded tub spout
- Stem extension kit RP77991 can be ordered to allow for an additional 1 3/4" wall thickness. RP77991 ships with chrome escutcheon screws. For special finishes also order RP12630 escutcheon screws in desired finish.

#### **WARRANTY**

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



#### **COMPLIES WITH**

- ASME A112.18.1 / CSA B125.1
- ASSE 1016

Indicates compliance to

ICC/ANSI A117.1 - Valve control only
■ EPA WaterSense® - Applies to BT13210, BT13410 & RP102064

**Delta Faucet Company** 55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON NSP 4L1 © 2021 Delta Faucet Company