


Submitted Model No.:

Specific Features:



▲ Designate proper finish suffix

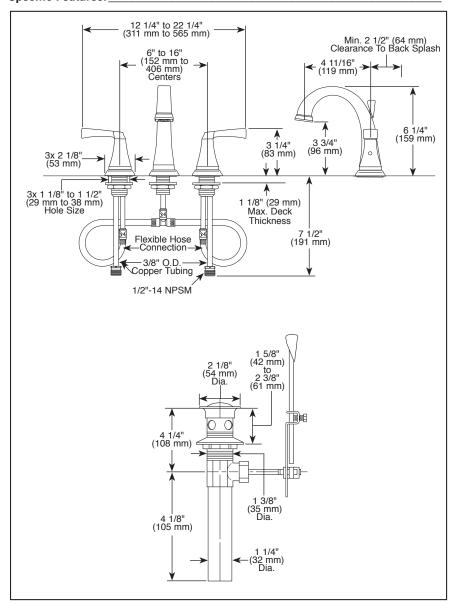

LAVATORY FAUCETS

- Dryden[™] Bath Collection
- Two Handle Widespread Deck Mount

STANDARD SPECIFICATIONS:

- Max. 1.20 qpm @ 60 psi, 4.54 L/min @ 414 kPa
- Three hole mount
- Solid brass fabricated end valve and spout bodies
- Quick-Snap® installation
- 1/4 turn handle stops
- Control mechanism is a rotating cylinder with stainless steel plate and 90° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Metal pop-up drain assembly
- Note: Standard mounting deck thickness can be extended 1" with RP10612

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLETE VALVE COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
 ASME A112.18.2 / CSA B125.2
 Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- "LF" models verified compliant with .25% weighted average Pb content regulations.

