Cartridge Hard Soldering

SUPER FIRE 3

Ergonomic HEAVY-DUTY brazing unit up to Ø 28 mm

For soft soldering, brazing and other applications such as loosening of colour or shrinking of hoses

Brazing: up to Ø 28 mm (with flame reflector in a wind protected environment)

- Versatile for use in all positions (360°)
- Rapid heat-up, less consumption!
- Long service life
- "Twist 'N' Load" system (5 different nozzles available)
- Precise flame adjustment
- Up to 2.5 hours of brazing with one cartridge
















7/16" EU Coupling:

Handle: Aluminium, bolted **Burner:** Brass / stainless steel

"Twist 'N Load": 5 different nozzles for different applications

"Twist 'N' Load"!

Fast "Twist 'N' Load" system

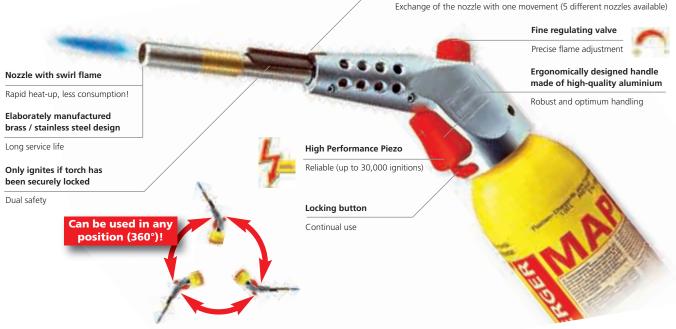

(No. 35456)

SUPER FIRE 3 Nozzles

Quick exchange with the "Twist 'N' Load" system

Pin-point Nozzle (460 °C):

For fine soldering; precise and stable flame (No. 35455) Standard Nozzle (700 °C): For soft soldering and other jobs with lower

Cyclone Nozzle (950 °C):

For hard and soft soldering with an efficient swirl flame

heat application; precise, powerful and stable flame



Hot air Nozzle (400 °C):

For the removal of paint and for shrinking work up to approx. 80 mm diameter; wind-stable, powerful current of hot air





Shrinking Nozzle (720 °C):

For shrinking up to dia. 300 mm and for heating; powerful, wind-stable soft flame



SUPER FIRE 3 HOT BOX







5 part set (No. 035490U) includes: handle (No. 35445), cyclone nozzle (No. 35457), pin-point nozzle (No. 35455), flame reflector (No. 31043), universal torch support (No. 35461), carrying case

Model			No.
SUPER FIRE 3 HOT BOX EU	1	4	35490
SUPER FIRE 3 HOT BOX US (without MAPP®1)	gas) 1	4	035490U