

Single Handle Lavatory Faucet

DESCRIPTION

- Solid brass construction
- Chrome, Brushed Chrome or Brushed Nickel finish
- 1/2" IPS connections
- Solid brass waterways

OPERATION

- Lever handle
- Temperature controlled through 110° arc of handle


FLOW

- Standard aerator is limited to 2.2 gpm max. (8.3 L/min)

CARTRIDGE

- Ceramic disc cartridge *(with temperature limit stop)
- Nonmetallic/nonferrous and ceramic material

STANDARDS

- Third party certified to WaterSense® (only applies to 1.5 gpm), ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein including NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handles

WARRANTY


- Warranted for 5 years against material or manufacturing defects

MODEL	FLOW (gpm)	DRAIN	FINISH	WATERSENSE CERTIFIED
8413	2.2	Without	Chrome	
8413F15	1.5	Without	Chrome	x
8413F05	0.5	Without	Chrome	
8413F03	0.35	Without	Chrome	
8414	2.2	Metal	Chrome	
8414BC	2.2	Metal	Brushed Chrome	
8414BN	2.2	Metal	Brushed Nickel	



See table above

NOTE: This faucet is designed to be installed thru 3 holes, 1" min. dia.

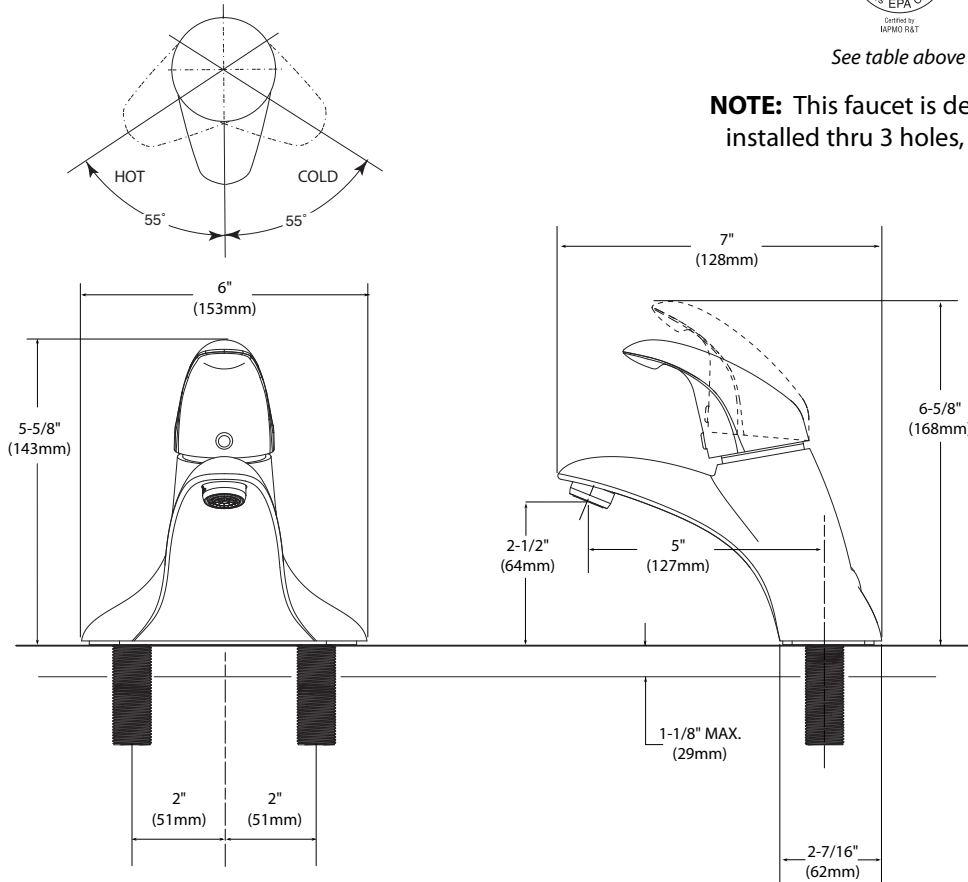

CRITICAL DIMENSIONS

(DO NOT SCALE)