

DESCRIPTION

- Brass construction with chrome plated finish
- 1/2" IPS connections
- 4" centerset
- 5-1/4" spout reach

OPERATION

- 4" wrist blade handles with hot and cold color indicators*
- *Smooth handle models have hot and cold color indicator at torx head screw
- Vandal resistant torx head screws
- Vandal resistant laminar flow aerator

CARTRIDGE


- Brass shell, ceramic disc cartridge
- 1/4 turn operation

STANDARDS

- Third party certified to meet A112.18.1/CSA B125.1 and all applicable specifications referenced therein
- Certified to NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA** for lever handles

WARRANTY

- Warranted for five years against material or manufacturing defects

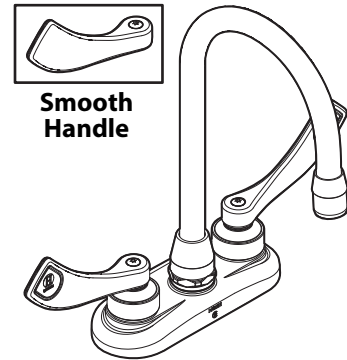


Two-Handle Bar/Pantry Faucet		
MODEL	FLOW (gpm/Lpm)	HANDLE STYLE
❖ 8279	1.2/4.5	Decal
❖ 8279SM	2.2/8.3	Smooth
❖ 8279SMF12	1.2/4.5	Smooth

❖ Includes optional 2.0 gpm (7.6 L/min) max. laminar flow spout base conversion kit

❖ Includes optional 1.2 gpm (4.5 L/min) max. laminar flow spout base conversion kit



NOTE: Designed to be installed through 2 holes - 1" min. dia.

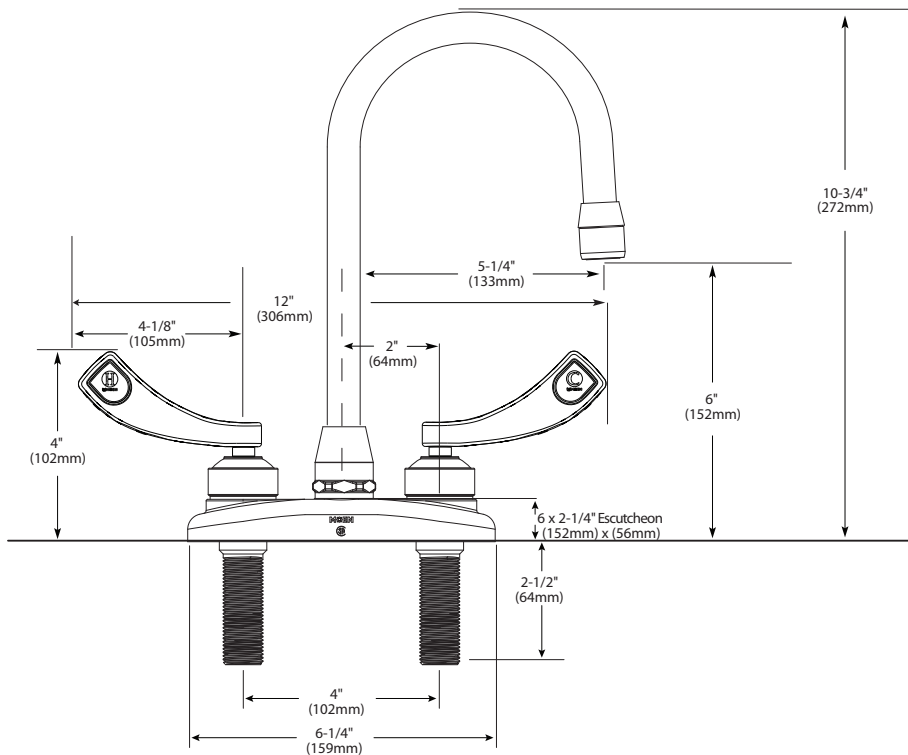

CRITICAL DIMENSIONS

(DO NOT SCALE)