의용

This unit offers anti-siphon protection only.

The Woodford Model 22 is designed to provide yearround hot and cold water service regardless of outside temperature. Separate hot and cold inlet tubes and operating handles allow for manually operated water temperature control.

Available in three models:

- Model 22 Horizontal Mount Rough Brass
- Model V22 Vertical Mount Rough Brass For end wall installation
- Model 22CC Close Coupled Rough Brass For use in non-freeze areas - Fits within 2" X 4" wall

SUGGESTED USES:

Residential structures where hot and cold water service is required.

FEATURES:

- Faucet drains automatically when hose is removed.
- Permanent stainless steel seat will not wire draw.
- · EPDM packing to prevent leaking.
- Loose Tee Key optional

OPTIONAL: An RK-PT Repair Kit is available at additional cost to convert the hot side handle to a Push to Turn. This will reduce the potential to unintentionally turn on the hot water.

SPECIFICATIONS:

- ASSE 1019 Type A approved
- CSA certified
- UPC®/IAPMO Listed

Nozzle - 3/4" male hose thread

Valve Operating Threads - Full circle threads on valve body and retainer

No Lead Solder - All solder joints

Seat Washer - Standard "O" size

Handle - Polycarbonate Optional - Powder coated die cast aluminum

Max. Pressure - 125 p.s.i.

Max. Water Temperature - 120° F

U.S. Patents: Manufactured under one or more of the following patents: 6,206,039B1; 5,632,301; 5,590,679

Model 22 & V22 Shipping Weight

Wall Thickness (inches)

16 18 24 3.0 3.2 3.8 4.0 Shipping Wt. Ea. Lbs.

*Overall Length Dimension: Add wall thickness and inlet option length shown in chart at the right. Overall length for Model 22CC (Close Coupled) is 2 3/4". See reverse side for Rough-In-Dimensions.

Freezeless WOODFORD **Hot & Cold Wall Faucet Model 22/V22/22CC**









COMBINATION 1/2" Male Pipe Thread 1/2" Female Sweat

> **CP3 INLET** COMBINATION 3/4" Male Pipe Thread 3/4" Female Sweat


PINLET COMBINATION 1/2" Female Pipe Thread 3/4" Male Pipe Thread


PX INLET 1/2" PEX Tube Fitting W INLET 1/2" Wirsbo® Tube Fitting **R INLET** 1/2" Rehau® Tube Fitting


CM INLET COMBINATION 1/2" Compression Fitting 1/2" Copper Sweat Fitting


C1 INLET 1/2" Female Sweat Fitting 22 Close Coupled ONLY

1 3/4










When ordering, specify model, inlet and wall thickness



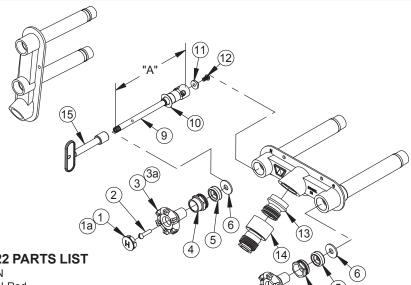

MODEL 22 & V22 PARTS LIST

ITEM	PART#	DESCRIPTION			
1.	30463	Plug Button-H-Red			
1a.	30566	Plug Button-H-Red (for aluminum handle)			
2.	30002	Handle Screw (2)			
3.	30099	Wheel Handle (2)			
3a.	30096	Wheel Handle (2) (aluminum)			
4.	30497	Long Packing Nut			
5.	30560	EPDM Packing (2)			
6	30006	Packing Support Washer			

6. 30006 Packing Support Washer
7. 30462 Plug Button C-Blue

7a. 30565 Plug Button-C-Blue (for aluminum handles)

8. 30059 Packing Nut

9. 35XXX Valve Stem Assembly (See chart at right)

Note: Valve stems are interchangeable with Model 22 and V22 Head assemblies.

10. 30459 Check Valve (2)

10. 30459 Check Valve (2) 11. 30008 Valve Seat Rubber (2) 12. 30009 Retainer Screw (2)

13. 55434 1-1/8" Brass Nozzle Assembly w/O-ring

14. 32070 VB222 Vacuum Breaker
15. 50012 Tee Key
RK-PT Push To Turn Repair Kit


RK-22 Repair Kit

Includes 1 ea: Item 1, 4, 7, 8


2 ea: Items 2, 3, 5, 6, 10, 11, 12 RK-22MH Repair Kit (aluminum handles) Includes 1 ea: Item 1a, 4, 7a, 8

2 ea: Items 2, 3a, 5, 6, 10, 11, 12

VALVE STEM ASSEMBLY DIM. "A"				
Wall Thickness	Length	Part No.		
CC (1 3/4)	3 5/8"	35942		
4	5 7/8"	35720		
6	7 7/8"	35721		
8	9 7/8"	35722		
10	11 7/8"	35723		
12	13 7/8"	35724		
14	15 7/8"	35725		
16	17 7/8"	35736		
18	19 7/8"	35726		
20	21 7/8"	35737		
22	23 7/8"	35738		
24	25 7/8"	35727		



Model 22 Rough-In Dimensions



Model V22 Rough-In Dimensions

For more information contact...

WOODFORD MANUFACTURING COMPANY