# 144-123 **QUANTUM**®

## **MANSFIELD®**

Elongated Front, Pressure-Assist, Rear Outlet, Wall-Mount, Vitreous China Two-Piece Toilet

### **FEATURES**

- High performance, pressure-assist Flushmate III™ system
- 1.6 gpf / 6.0 lpf low water consumption
- · Elongated rear outlet, wall-mount
- · Model 45 chrome-plated, metal trip lever
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty on china, Flushmate ten-year limited warranty on vessel
- · Available in White



#### **COMPONENTS**

MODEL #	DESCRIPTION	CODES/STANDARDS			
144-123	Elongated front, rear outlet, wall-mount pressure-assist, two-piece toilet. Includes tank trim and chrome-plated metal trip lever. Less toilet seat and supply.				
144	Elongated front, rear outlet, wall-mount toilet bowl only. Less toilet seat and supply.				
123	Pressure-assist tank and cover only with left hand chrome-plated, metal trip lever. Less supply. Specify color.				
TANK OPTIONS	TANK OPTIONS ADA COMPLIANT				
123RH	Pressure-assist tank and cover only with right hand chrome-plated, metal trip lever. Less supply. Specify color.				
122	Pressure-assist tank and cover only with chrome-plated metal push button actuator. Less supply. Specify color.				
TANK TRIM & RE	TANK TRIM & REPLACEMENT PARTS				
45	Trip lever - chrome-plated, metal trip lever, left hand				
125-LID	Tank lid				
FLUSHMATE® 503	Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460.				

When properly installed, this product meets the requirements for the Americans with Disabilities Act of 1990 (ADA). Refer to local plumbing codes, as they may vary by location and application.

# 144-123 **QUANTUM**®

## **MANSFIELD®**

Elongated Front, Pressure-Assist, Rear Outlet, Wall-Mount, Vitreous China Two-Piece Toilet

### **SPECIFICATIONS**


MODEL #	DESCRIPTION	CODES/STANDARDS
144-123	Elongated front, rear outlet, wall-mount (1.6 gpf / 6.0 lpf) two-piece toilet	C ® ADA COMPLIANT

MATERIAL	Vitreous China
WATER PRESSURE RANGE	35 to 80 PSI
FLUSH SYSTEM	Flushmate III™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	9-3/4' X 8'
ROUGH-IN	Rear outlet, wall mount
MAP RATING	1,000 grams

TRAP DIAMETER	2'
TRAP SEAL	2-1/8'
SHIPPING WEIGHT	Model 144 - 61 lbs. (27.6 kg) Model 123 - 41 lbs. (18.5 kg)
WARRANTY	Vitreous China - Limited Lifetime Vessel - Limited Ten Year (Flushmate)

### **TECHNICAL INFORMATION**

Note: these dimensions are nominal and subject to change without notice.

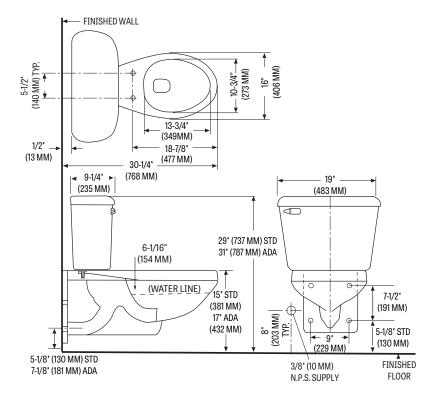

When properly installed, this product meets the requirements for the Americans with Disabilities Act of 1990 (ADA). Refer to local plumbing codes, as they may vary by location and application.

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.