


## P3 Comforts Toilet wall mounted Duravit Rimless for SensoWash® # 256159..00

| < 380 mm > |

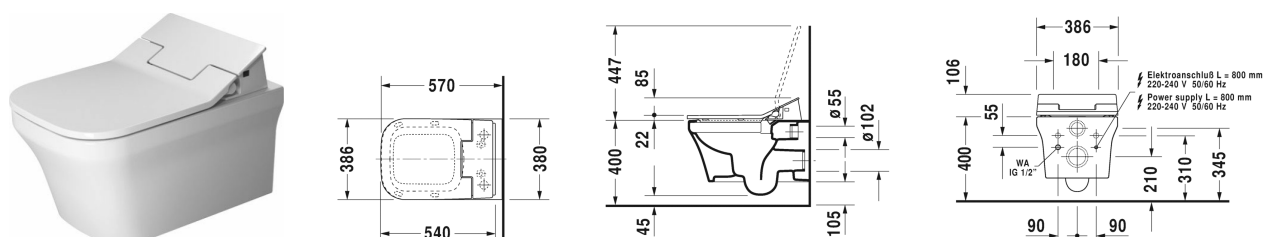

Toilet wall mounted Duravit Rimless for SensoWash®	Dimension	Weight	Order number
rimless, washdown model, Durafix included, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, EWL class 1			
<b>Colors</b>			
00 White Alpin 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
<b>Variant</b>			
4,5 l	380 x 570 mm	24.500 kilogram	256159..00
<b>Infobox</b>			
Durafix for invisible fixation is included in delivery, Wall-mounted toilet is ADA compliant, when installed with a seat height of 17" - 19" from the finished floor			
Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come. When ordering WonderGliss please add a "1" as eleventh digit to the model number.			
<b>Accessory for ceramics</b>			
Fixing for wall mounted bidet and wall mounted toilet	Ø 12 x 180 mm	0.200 kilogram	006500
<b>Accessory</b>			
Connecting set in combination with SensoWash, for Geberit Monolith sanitary modules for WCs			100692
Connecting set in combination with SensoWash, for in-wall carriers with conduit pipe for connection inside the tank			100691
Pre-installation kit in combination with SensoWash, for in-wall carrier with horizontal support without shower toilet pre-installation/conduit pipe			005072
Noise reduction gasket for wall mounted toilet		0.300 kilogram	005064
<b>Suitable products</b>			

## P3 Comforts Toilet wall mounted Duravit Rimless for SensoWash® # 256159..00

|< 380 mm >|

SensoWash® Slim shower toilet seat for P3 Comforts\* with concealed connections, Remote control included, Locking function via remote control, Rear-, Lady- and Comfortwash, Individual adjustment of water temperature as well as spray wand position and water spray intensity, Self-cleaning spray wand, with soft closure, Night light, Seat and lid easy removable one-handed, Automatic drainage in periods of prologed disuse, on / off-button, 386 x 540 mm

386 x 540 mm

611400

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished ceramic piece.*