

Location:

SYMMONS® Origins®

Kitchen Faucet S-23 Series

Specification Submittal



Model S-23



Feature Highlights

- Single lever kitchen faucet with red & blue indicators on handle
- Handle limit stops
- 8-3/4 inch swing spout with aerator
- Ceramic control components

- Supply has 3/8 inch copper tubing, 8-inch centers
- Metal construction, polished chrome finish
- 2.2 gpm (8.3 L/min) standard flow rate





Standards / Certifications

ASME A112.18.1/CSA B125.1
NSF/ANSI 61.9, NSF/ANSI 372




Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations


S-23 series			
S-23-2-LP	S-23-2-W	S-23-1	S-23-3
			
Ordering Information Model Numbers Append appropriate -suffix to model number. ☐ S-23 Faucet only ☐ S-23-1 Faucet with swivel spray aerator in place of hose and spray (not available in low flow). ☐ S-23-2 Faucet with hose and spray ☐ S-23-3 Faucet with hose and spray mounted on escutcheon		Other Options Append appropriate -suffix to model number. ☐ -LST 18 inch copper supply tubing ☐ -BH 20 inch (508 mm) braided hose supplies (not available with -SM option for S-23-2 and S-23-3 configurations) ☐ -10 10-7/8 inch swing spout with aerator ☐ -IPS 1/2 inch IPS connections ☐  -0.5 Vandal resistant, 0.5 gpm (1.9 L/min) aerator ☐  -1.0 1.0 gpm (3.8 L/min) aerator ☐  -1.5 1.5 gpm (5.7 L/min) aerator ☐ -VP Vandal resistant, 2.2 gpm (8.3 L/min) aerator ☐ -VP-1.5 Vandal resistant, 1.5 gpm (5.7 L/min) aerator ☐ -NA Non-aerated, 2.2 gpm (8.3 L/min) laminar flow outlet ☐ -SM Single hole mounting (not available with -BH option for S-23-2 and S-23-3 configurations)	
Finish Options / Modifications Append appropriate -suffix to model number. ☐ -STN Satin nickel finish* - Polished chrome (standard finish)			
Handle Options / Modifications Append appropriate -suffix to model number. ☐ -LP Loop handle ☐ -W Lever handle 6 inch (152 mm) chrome only			

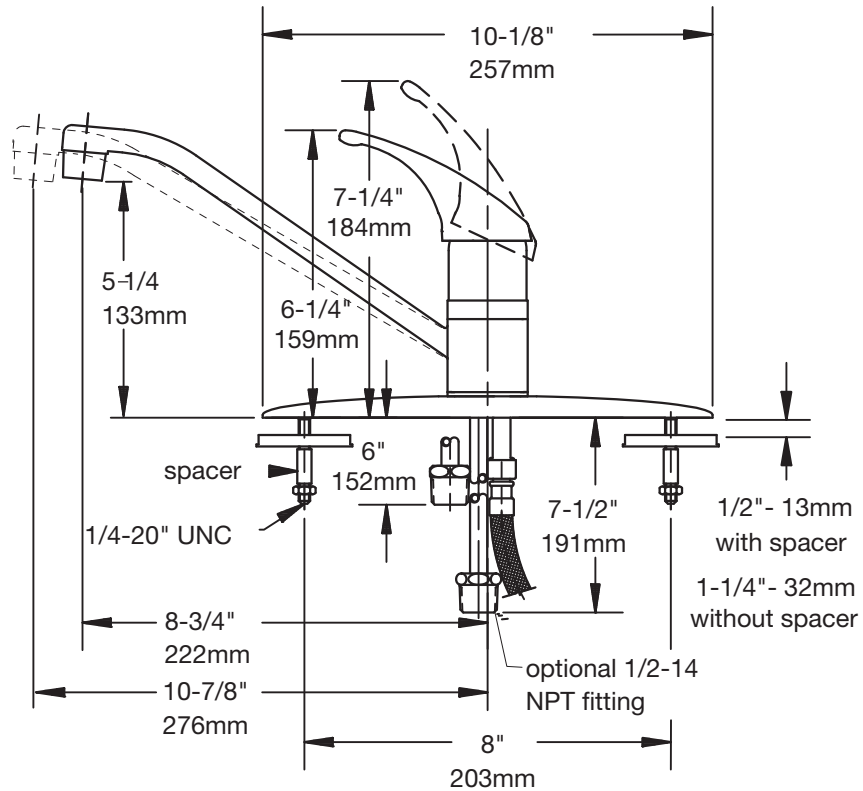Dimensions *Symmetrix Kitchen Faucet, S-23*




Note: Dimensions subject to change without notice.

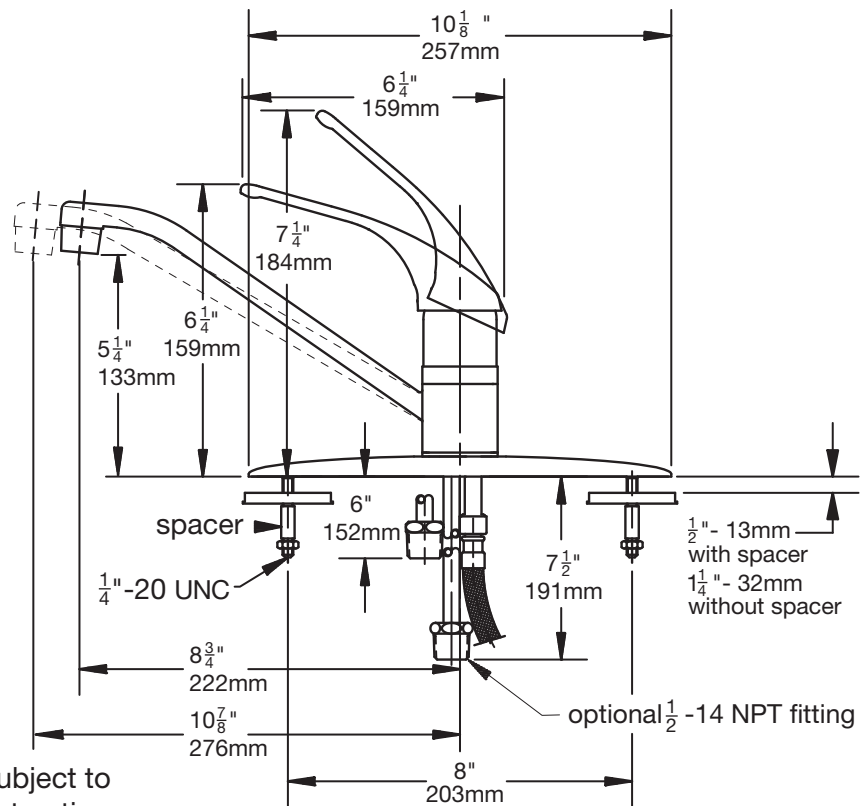Dimensions *Origins Kitchen Faucet, S-23-W*




Note: Dimensions subject to change without notice.

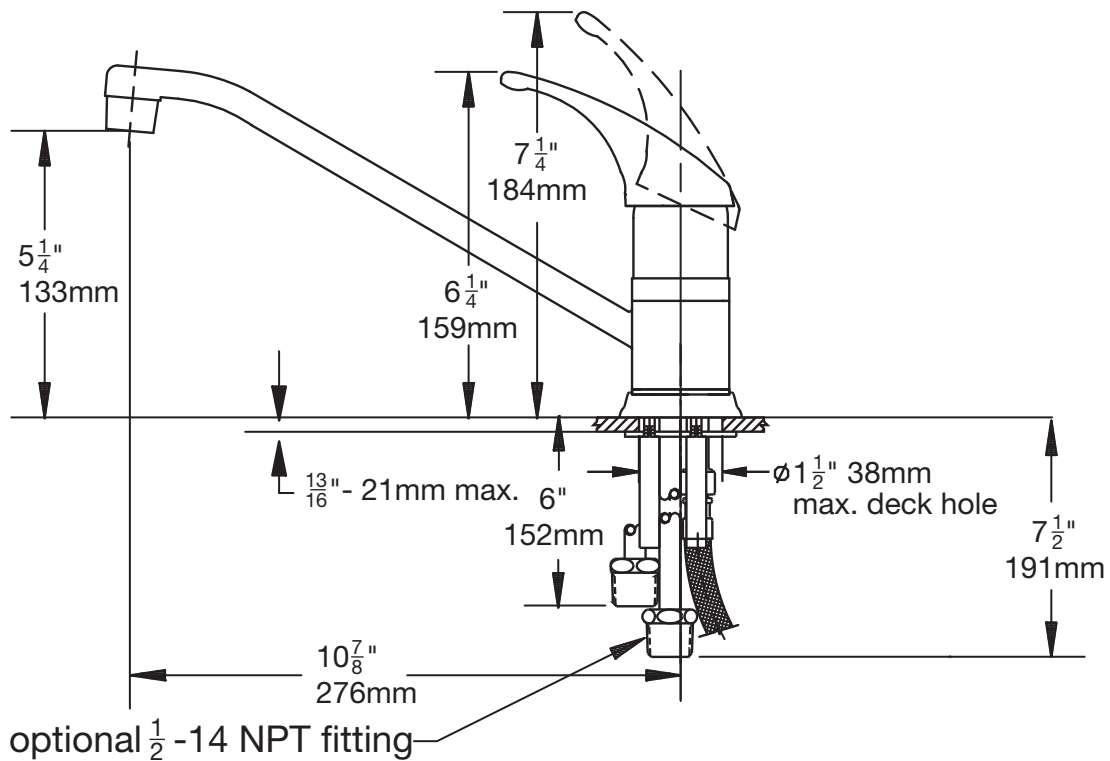Dimensions *Origins Kitchen Faucet, S-23-SM-10*




Note: Dimensions subject to change without notice.

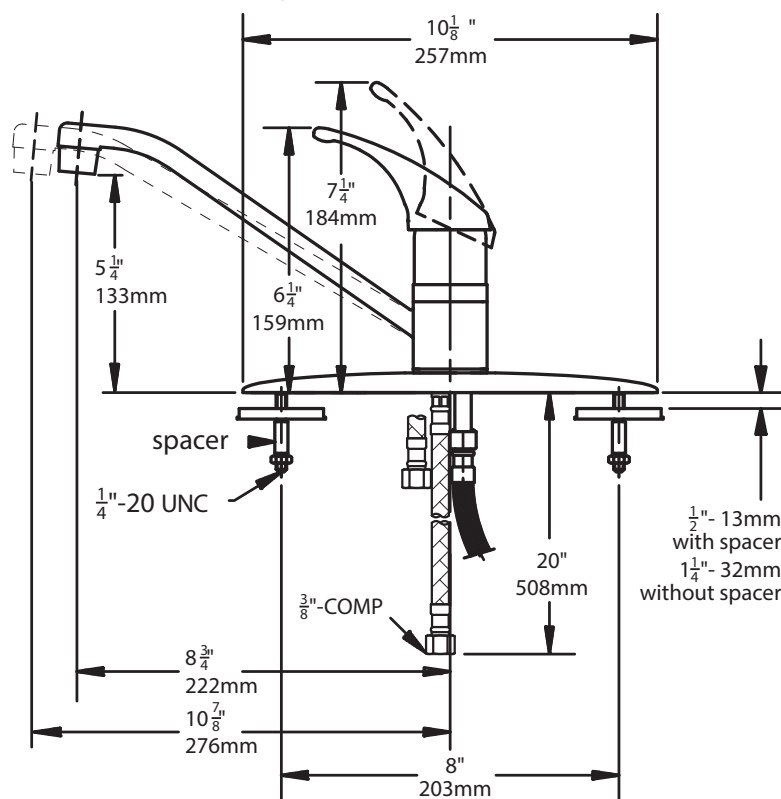Dimensions *Origins Kitchen Faucet, S-23-BH*




Note: Dimensions subject to change without notice.

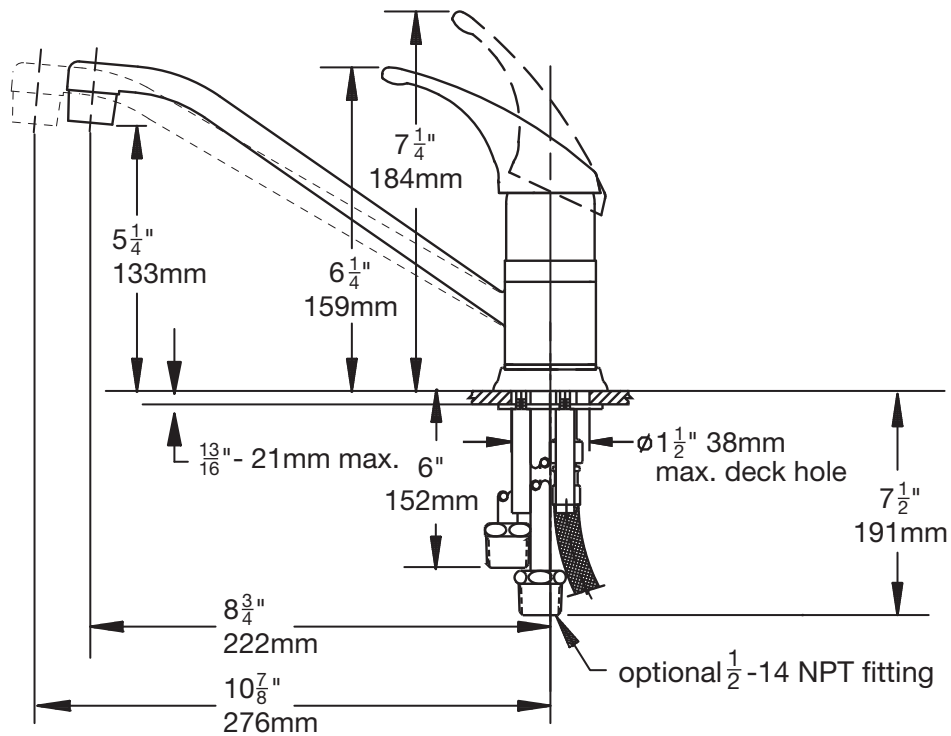Dimensions *Origins Kitchen Faucet, S-23-SM*



Note: Dimensions subject to change without notice.

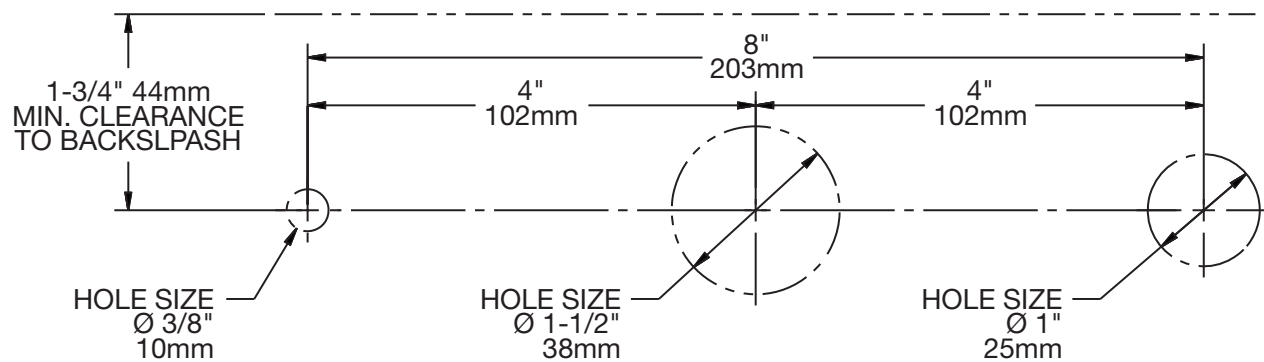Dimensions *Suggested Hole Template for S-23-3 Series*



Note: Dimensions subject to change without notice.

Emplacement:

SYMMONS® Origins®

Robinet de cuisine de série S-23

Présentation des spécifications



Modèle S-23



Principales caractéristiques

- Robinet à levier unique de cuisine livré avec pastilles rouges et bleues sur la poignée
- Limite d'arrêt de la poignée
- Bec pivotant 8-3/4 pouces avec aérateur

- Composants des commandes en céramique
- Alimenté par un tuyau de cuivre de 3/8 pouces, centres de 8 pouces
- Construction métallique, finition chromée polie
- Débit standard de 2,2 gpm (8,3 L/min)





Normes/certifications

ASME A112.18.1/CSA B125.1
NSF/ANSI 61.9, NSF/ANSI 372



Garantie

- Garantie à vie limitée - à l'acheteur initial dans les installations du client.
- 5 ans - pour les installations commerciales

Série S-23			
S-23-2-LP	S-23-2-W	S-23-1	S-23-3
 	 	 	 
Informations de commande Numéros de modèles Joindre le -suffixe approprié au numéro de modèle. ☐ S-23 Robinet seulement ☐ S-23-1 Robinet avec aérateur de pulvérisation pivotant à la place du boyau et pulvérisateur (non disponible pour les modèles à faible débit) ☐ S-23-2 Robinet avec boyau et pulvérisateur ☐ S-23-3 Robinet avec boyau et pulvérisateur montés sur une rosace		Autres options Joindre le -suffixe approprié au numéro de modèle. ☐ -LST Tuyau d'alimentation en cuivre de 18 pouces ☐ -BH Fournitures de boyau fileté de 508 mm (non disponible avec l'option -SM pour les configurations S-23-2 et S-23-3) ☐ -10 Bec pivotant de 10-7/8 pouces avec aérateur ☐ -IPS Raccords IPS de 1/2 pouce ☐  -0.5 Aérateur résistant au vandalisme de 1,9 L/min ☐  -1.0 Aérateur de 3,8 L/min ☐  -1.5 Aérateur de 5,7 L/min ☐ -VP Aérateur résistant au vandalisme de 8,3 L/min ☐ -VP-1.5 Aérateur résistant au vandalisme de 5,7 L/min ☐ -NA Sortie à flux laminaire non aéré de 8,3 L/min ☐ -SM Fixation à trou unique (non disponible avec l'option -SM pour les configurations S-23-2 et S-23-3)	
Options/modifications du fini Joindre le -suffixe approprié au numéro de modèle. ☐ -STN Fini nickel satiné*			
Options/modifications de la poignée Joindre le -suffixe approprié au numéro de modèle. ☐ -LP Poignée en boucle ☐ -W Poignée en levier 6 pouces (152 mm) chrome seulement			