

# **Specifications**

#### DESCRIPTION

- Metal construction with various finishes identified by suffix
- Flexible supply lines with 3/8" compression fittings
- Includes metal pop-up waste assembly

### **OPERATION**

- Lever style handle
- Temperature controlled by 100° arc of handle travel

#### **FLOW**

Flow is limited to 1.0 gpm max (3.8L/min) at 60 psi

1255™ Duralast™ cartridge for Single-Handle Faucets


#### **STANDARDS**

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1, NSF 61/9 & 372 and all applicable requirements referenced therein
- Products marked with 1.0gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 🖶 for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original

10 year limited warranty when used in a multifamily installation 5 year limited warranty when used in a commercial installation




90 DEGREE™ **Single-Handle Lavatory Faucet** 

**Models:** S6701

S6701BN

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/8" MIN. DIA.

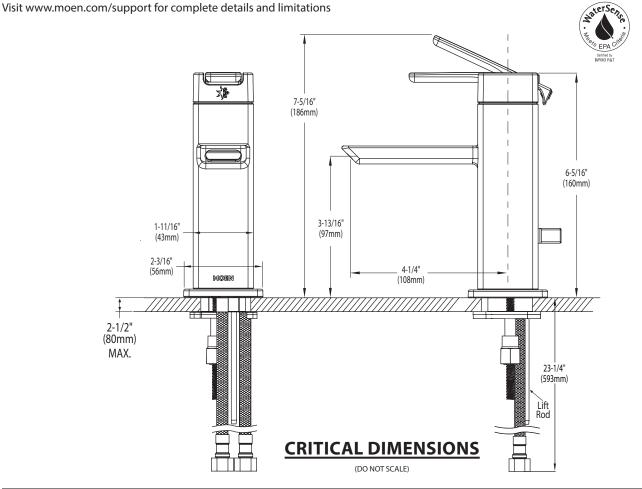

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com