

## DUPLEX HARD PIPED PACKAGES

### APPLICATIONS

Low pressure sewer applications, sewage wastewater transfer for light commercial or residential applications

### FEATURES

- Basin is 36" x 48" heavy-duty fiberglass and solid fiberglass cover with non-skid surface
- Basin comes configured with hard pipe installation
- 1-1/4" SCH 80 PVC check valve and ball valve
- SCH 80 PVC discharge piping with union disconnect
- 4" Adapt-A-Flex inlet
- 1-1/4" FNPT discharge flange factory installed
- Control panel with integral pump starting components
- Two 2 hp GP Series grinder pumps
- Four weighted control floats



### SERIES SPECIFICATIONS

#### DUPLEX GRINDER HARD PIPED PACKAGE SYSTEM\*\*

Item No.	Model	Basin			Style	Description
		Size	Height	Discharge Center Line (Installed from top)		
520847	GP-DPLXFG-HP	36" x 48" 61 cm x 121.9 cm	48" 121.9 cm	12" 30.48 cm	Fiberglass	BS3648FGHP

\*\* Multiple Grinder Package configurations and Basin/Cover assemblies available. Please call 1.800.701.7894 for information on additional package specifications not shown here.

#### PUMP

Item No.	Model	Volts
520862	GP-M231-15	208-230

#### CONTROL PANEL

Item No.	Model	Volts
513355	1026540	208/230


#### FLOATS

Item No.	Model	Volts
950266	CFSW	115/230

# GRINDER PACKAGES

## DUPLEX HARD PIPED PACKAGES

### ENGINEERING DATA

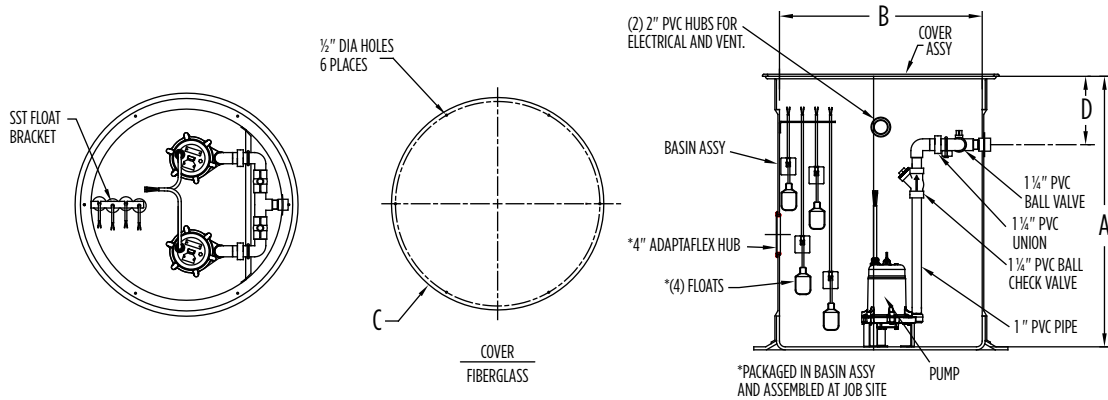

Item No.	Model	A	B	C	D
520847	GP-DPLX3660	48" 122 cm	36" 91.44 cm	40" 101.6 cm	12" 30.48 cm

### PUMP PERFORMANCE DATA

