


# UTILITY TRANSFER PUMPS

## APPLICATIONS

Ideal for draining hot water tanks, appliances, boat bilges and aquariums as well as water transfer applications where easy portability is required.

## FEATURES & BENEFITS

- Portable non-submersible transfer pumps
- Choice of 115 Volt or 12 Volt DC models
- Stainless steel construction
- Dual threaded intake and discharge fits both 3/4" male garden hose thread and 3/8" FNPT pipe connection
- Includes replacement impeller kit
- MPFVK115 includes hoses and suction attachment

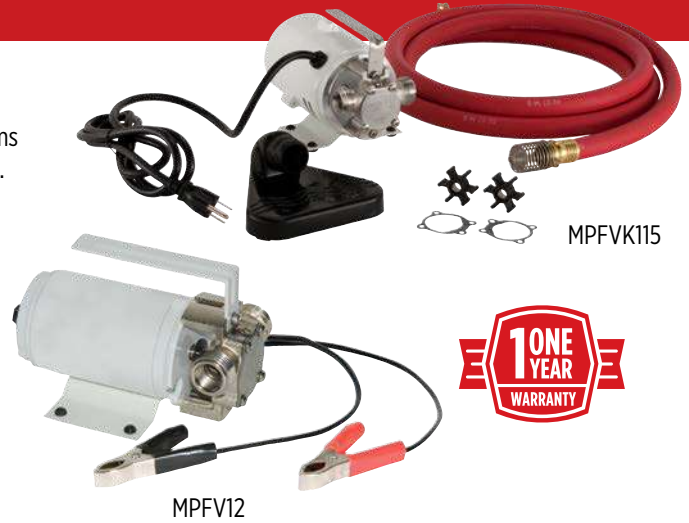

Model	Item No.	UPC	HP	Amps	Volts	Intake	Discharge	Cord Length	Gallons Per Hour at Height			
									0'	5'	10'	15'
MPFVK115	14942015	0 10121 00615 7	1/10	1.7	115	3/4" GHT, 3/8" FNPT	3/4" GHT, 3/8" FNPT	6'	365	330	300	280
MPFV12	14942004	0 10121 11803 4	1/10	7	12 V DC	3/4" GHT, 3/8" FNPT	3/4" GHT, 3/8" FNPT	6' leads	300	270	240	222

## CARTON SPECIFICATIONS

Model	Length	Width	Height	Weight (lbs)	Carton Cubes (cu ft)	Master Pack Quantity
MPFVK115	11"	12"	5"	8.6	0.38	2
MPFV12	4.75"	5.5"	7.5"	4.5	0.11	6

## MASTER PACK SPECIFICATIONS

Model	Length	Width	Height	Weight (lbs)	Carton Cubes (cu ft)	Pallet Quantity	Quantity per Layer	Layers per Pallet
MPFVK115	11"	10.75"	12.5"	17.2	0.86	36 Master Packs	12 Master Packs	3
MPFVK12	14.75"	11"	8.25"	26.7	0.77	36 Master Packs	12 Master Packs	3

Utility Transfer Pumps

