

Libella® ECOPOWER® Faucet

FEATURES

- Self-generating hydropowered ECOPOWER system
- No minimum daily usage requirement
- Micro-sensor positioned underneath the spout head for accurate hand detection ensuring smooth and consistent water distribution
- Vandal resistant aerator housing
- Durable chrome plated spout body
- Single-hole mount
- Kit includes spout body, controller box , and mounting hardware; supply lines not included
- 0.35 gpm aerated flow
- Contributes to earning LEED® credits

MODELS

- ☐ **TEL1A3-D20E**
 - TELS1A3 (Libella Spout)
 - TELC103-D20E (Controller: 0.11gpc, 20 sec on-demand)
- ☐ TEL1A3-D20EM
 - **TEL1A3-D20E** (Libella Spout Kit)
 - TLM10 (Mixing Valve)
- ☐ TEL1A3-D20ET
 - **TEL1A3-D20E** (Libella Spout Kit)
 - TLT20 (Thermostatic Mixing Valve)

COLORS/FINISHES

- #CP Polished Chrome

OPTIONAL ACCESSORIES

- THP3158#CP - 4" Cover Plate
- THP3159#CP - 8" Cover Plate
- THP3237 - Swivel Coupling

PRODUCT SPECIFICATION

TOTO Model # _____ The faucet shall have hydropowered self-generating, ECOPOWER System. The faucet shall have maximum of 20 seconds on-demand flow (0.11gpc). The faucet shall have self-adjusting sensor. Product equipped with 0.35gpm flow regulator.



CODES/STANDARDS

- Operates below federally mandated consumption limit of 0.25gpc
- Complies to California Green Building Code/ CALGreen of 0.20gpc
- Meets or exceeds ASME A112.18.1M/CSA B125.1, and NSF372-2011
- Certifications: IAPMO(cUPC), California Energy Commission (CEC) State of Massachusetts, and others
- Complies with California Green Code and City of Los Angeles Water Efficiency Ordinance
- ADA compliant
- Complies with Federal and State statutes as low-lead (contains a weighted average of 0.25% lead or less)
- Complies with CA Prop 65 warning requirements

* For codes and standards of mixing valve TLM10 and TLT20, please refer to corresponding product spec sheet.



TEL1A3 Series

Libella® ECOPOWER® Faucet

SPECIFICATIONS


Power Supply	ECOPOWER
Sensor Detection Range	5-1/8" - 7-7/8" (130 - 200mm) Sensor is self-adjusting
Water Supply Pressure	Min Flowing) Pressure: 15 psi (100kPa) Max (Static) Pressure: 80 psi (551kPa)
Water Supply	G1/2 (1/2 NPSM compatible)
Inlet Temperature Range	32-110°F(0-42°C)
Ambient Temperature	32-104°F(0-40°C)
Humidity	Max. 90% RH
Flow Rate	0.11 gpc* - max 20 second On-Demand** (0.11 gpc = 0.35 gpm x 20/60 sec) Equipped with 0.35 gpm flow control
Warranty	Three years limited

*Gallons per cycle (gpc) is the amount of water per usage cycle.


**On-demand refers to the way in which the water is dispersed (i.e.; water is only dispersed when the sensor is activated by the user as needed).

PRODUCT DIMENSIONS


Libella

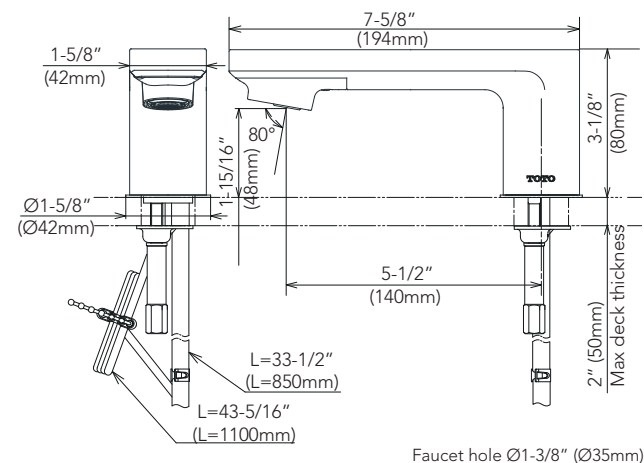


Controller

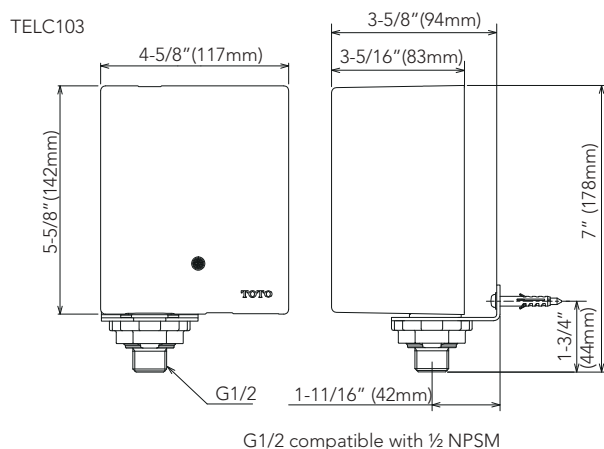

Available Mixing Valves

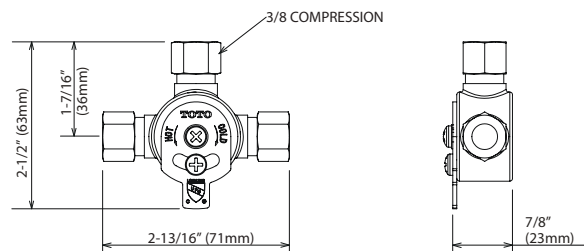

Hot/Cold Mixing Tee (TLM10)

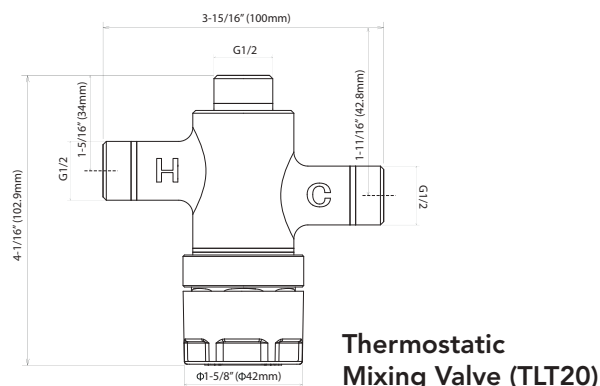

Thermostatic Mixing Valve (TLT20)

TOTO

These dimensions and specifications are subject to change without notice