





SPECIFICATIONS
AD SERIES
 DUCTLESS RANGE HOODS

Advantage Series Ductless Range Hood

- **Dimensions**
 Overall bottom projection - 18 1/2"
 Overall top projection - 12"
 Height - 6"
 Available widths: 21", 24", 30" & 36"
- **Hood Body**
 Stainless Steel: 24 gauge, grade 430 stainless steel.
 Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.
- **Motor**
 2 speed, single coil, thermally protected, permanently lubricated.
 Rated 120 volts, 60 hz., 0.7 amps. Complete with 105°C lead wires.
- **Lighting**
 Single 60 watt cook light capacity (bulb not included).
- **Ducting Options**
 Ductless - combination grease/charcoal filter included. (Model RF55)
- **Fan Blade**
 One piece polymeric, electronically balanced blade. 6 1/8" diameter with 3 paddles.
- **Electrical connection**
 Hood top - 7/8" knockout hole for use with 1/2" cable clamp
 Hood back - 7/8" knockout hole for use with 1/2" cable clamp
- **Filters**
 UL rated, class 2 filter.
 Combo Grease/Charcoal: RF55 - 8 7/8" x 10 3/8" (included).
- **Available Finishes**
 White, Biscuit, Almond, Black & Stainless Steel.

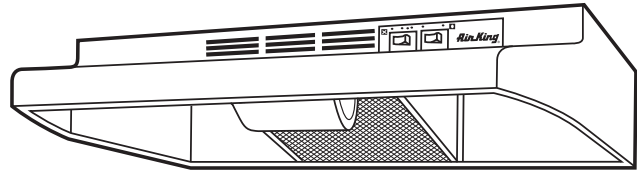

AD SERIES

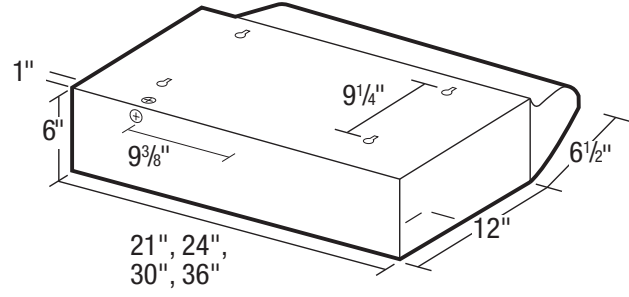

PROJECT							ARCHITECT		
LOCATION							ENGINEER		
CONTRACTOR							SUBMITTED BY		DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



U.S.: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada:
 Brampton, Ontario
 Tel: 800-250-8767
 Fax: (905) 456-1015