



# Electronic Exposed TECK® Flush Valve Retrofit Kits

## 81TURBTRKA - Exposed Battery Operated Retrofit Kit for Urinal

- Polished chrome plated vandal resistant metal cover with top mounted sensor operated H<sub>2</sub>OPTICS™ electronics
- Right or left-hand supply installation
- ADA compliant, automatic operation battery powered infrared sensor
- Scratch resistant replaceable lens window
- Four (4) size AA alkaline batteries factory installed with valve in sleep mode for easy installation
- Hinged battery housing for easy maintenance
- Low battery flashing light (5000 flushes remaining) with battery strength indicator
- Infrared sensor range adjustment of 457mm-914mm (18" - 36"), factory set at 28" (±2")
- Optional 24 hour automatic flush factory set to ON
- Set-up sensor range adjustment indicator lights
- 6 VDC input, 8 second arming delay
- Electronic operated non-hold-open **metal** manual override button with 5 second lockout
- Quiet action, TECK® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated finish
- **External water conserving flush adjustment**, factory set at 60 PSI to 1.9 litre (.50 US gal.)
- Handle-end plug

81TURBTRKA-38  
Same as 81TURBTRKA, but factory set at 60 PSI to 3.8 litre (1.0 US gal.), **Not Field Adjustable**


81TURBTRKA-19  
Same as 81TURBTRKA, **Not Field Adjustable**

81TURBTRKA-05  
Same as 81TURBTRKA, but factory set at 60 PSI to 0.5 litre (0.13 US gal.), **Not Field Adjustable**

**Note:** For **Hardwire** order **061069A** Hardwire Kit (includes 24VAC to 6VDC Converter, Vandal Resistant copper tube conduit and 2 x 4" Junction Box).

For **Hardwire with Battery Backup** order **016069A-BB**. 24VAC to 6VDC with 9V battery. (See DSP-BB).

Transformer ordered separately.

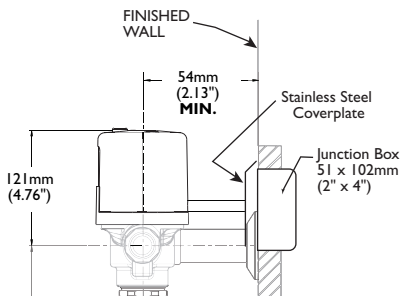

### Approvals:

- CSA certified
- ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.

- IAPMO listed

(Contact Delta Representative for State and/or Local Approvals.)

U.S. Patent # 6, 826, 455

Other Patents Pending



### Engineer/Architect Approval


Model Specified:

Approval:

Date:



81TURBTRKA

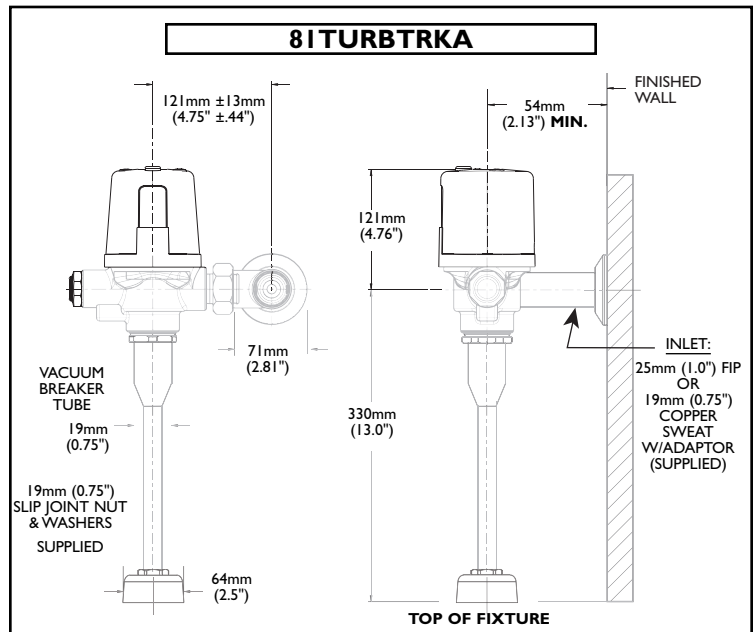

Note: For high and low pressure applications, please see page FEA-81T High Water Pressure note for more details. Verify flow requirements with bowl manufacturer.

Note: Measurements may vary ± 6mm (0.25")

Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Note: Use this page as a product submittal sheet.