




Tub and Shower

TRIM ONLY for Dual shower unit w/standard 24" SS Bar w/ ADA Slide handshower & shower div. valve-backflow protection via 2 integral check valves.
Req. R10700-UNWS Rough-in

Model No: T13H322-20

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Pressure Balance Valve ASSE 1016
-  Indicates compliance to ICC/ANSI A117.1
- Pressure Balance and Diverter lever handles ADA compliant to ICC/ANSI A117.1/ADA
- Handshower backflow protection provided by two integral certified check valves in series, which operate independently, ASME A112.18.3
- Handshower ADA compliant to ICC/ANSI A117.1/ADA
- (Contact Delta Representative for State and/or Local Approvals)



SPECIFICATION:

- Polished chrome plated finish - Pressure Balance cartridge - Temperature only controlled with handle - Field adjustable to limit handle rotation into hot water zone
- Integral checks in the cartridge prevent crossflow between Hot and Cold water inlets.
- Cartridge rated minimum 1.2 gpm @ 45 psi (4.5 L/min @ 310 kPa).
- Non-Removable Blue/Red visual cover indicator for Cold, Mixing and Hot handle positions
- Standard 24" Stainless Steel Bar with ADA Slide handshower and shower diverter valve-backflow protection provided by two integral check valves in handshower
- ADA Compliant diverter handle
- Handshower MAX: 1.5 GPM @ 80 PSI (5.7 L/min @ 552 kPa) - Handshower MIN: 1.13 GPM @ 45 PSI (4.3 L/min @ 310 kPa)
- Handle#: 2 - Metal Lever Handle – ADA compliant - 85mm (3.33")
- Optional 1753 mm (69") Long CP Stainless Steel Hose Stretches to 92" (2337 mm)
- #2 Shower - 3-Function Touch-Clean Showerhead, Arm & Flange
- #2 Shower Flow Rate MAX: 2.0 GPM @ 80 PSI (7.6 L/min @ 552 kPa)
- #2 Shower Flow Rate MIN: 1.7 GPM @ 45 PSI (6.4 L/min @ 310 kPa)

OPERATION:

- **NOTE FOR SHOWER #6: Not for use as anti-ligature device.**
- PAUSE warning—for T13H9, T13H3 & optional handshower #2

Plumbing Codes req. that showerheads and handshowers provide a small but continuous flow of water (trickle) when in "PAUSE" mode

- Because of this, pressure variations in the water line and/or changes in the position of the shower temp. control handle while in "PAUSE" mode could result in dramatic changes to the temp. of the water when the shower head or hand shower is returned to the "ON" position.

ALWAYS point the shower head away from yourself when returning to the "ON" position and feel the water with your hand before resuming your shower to ensure the water flow is not too hot or too cold.


DO NOT allow children or others who might not understand this warning to use the "PAUSE" function.

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced November 29, 2017.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030

Model No: T13H322-20

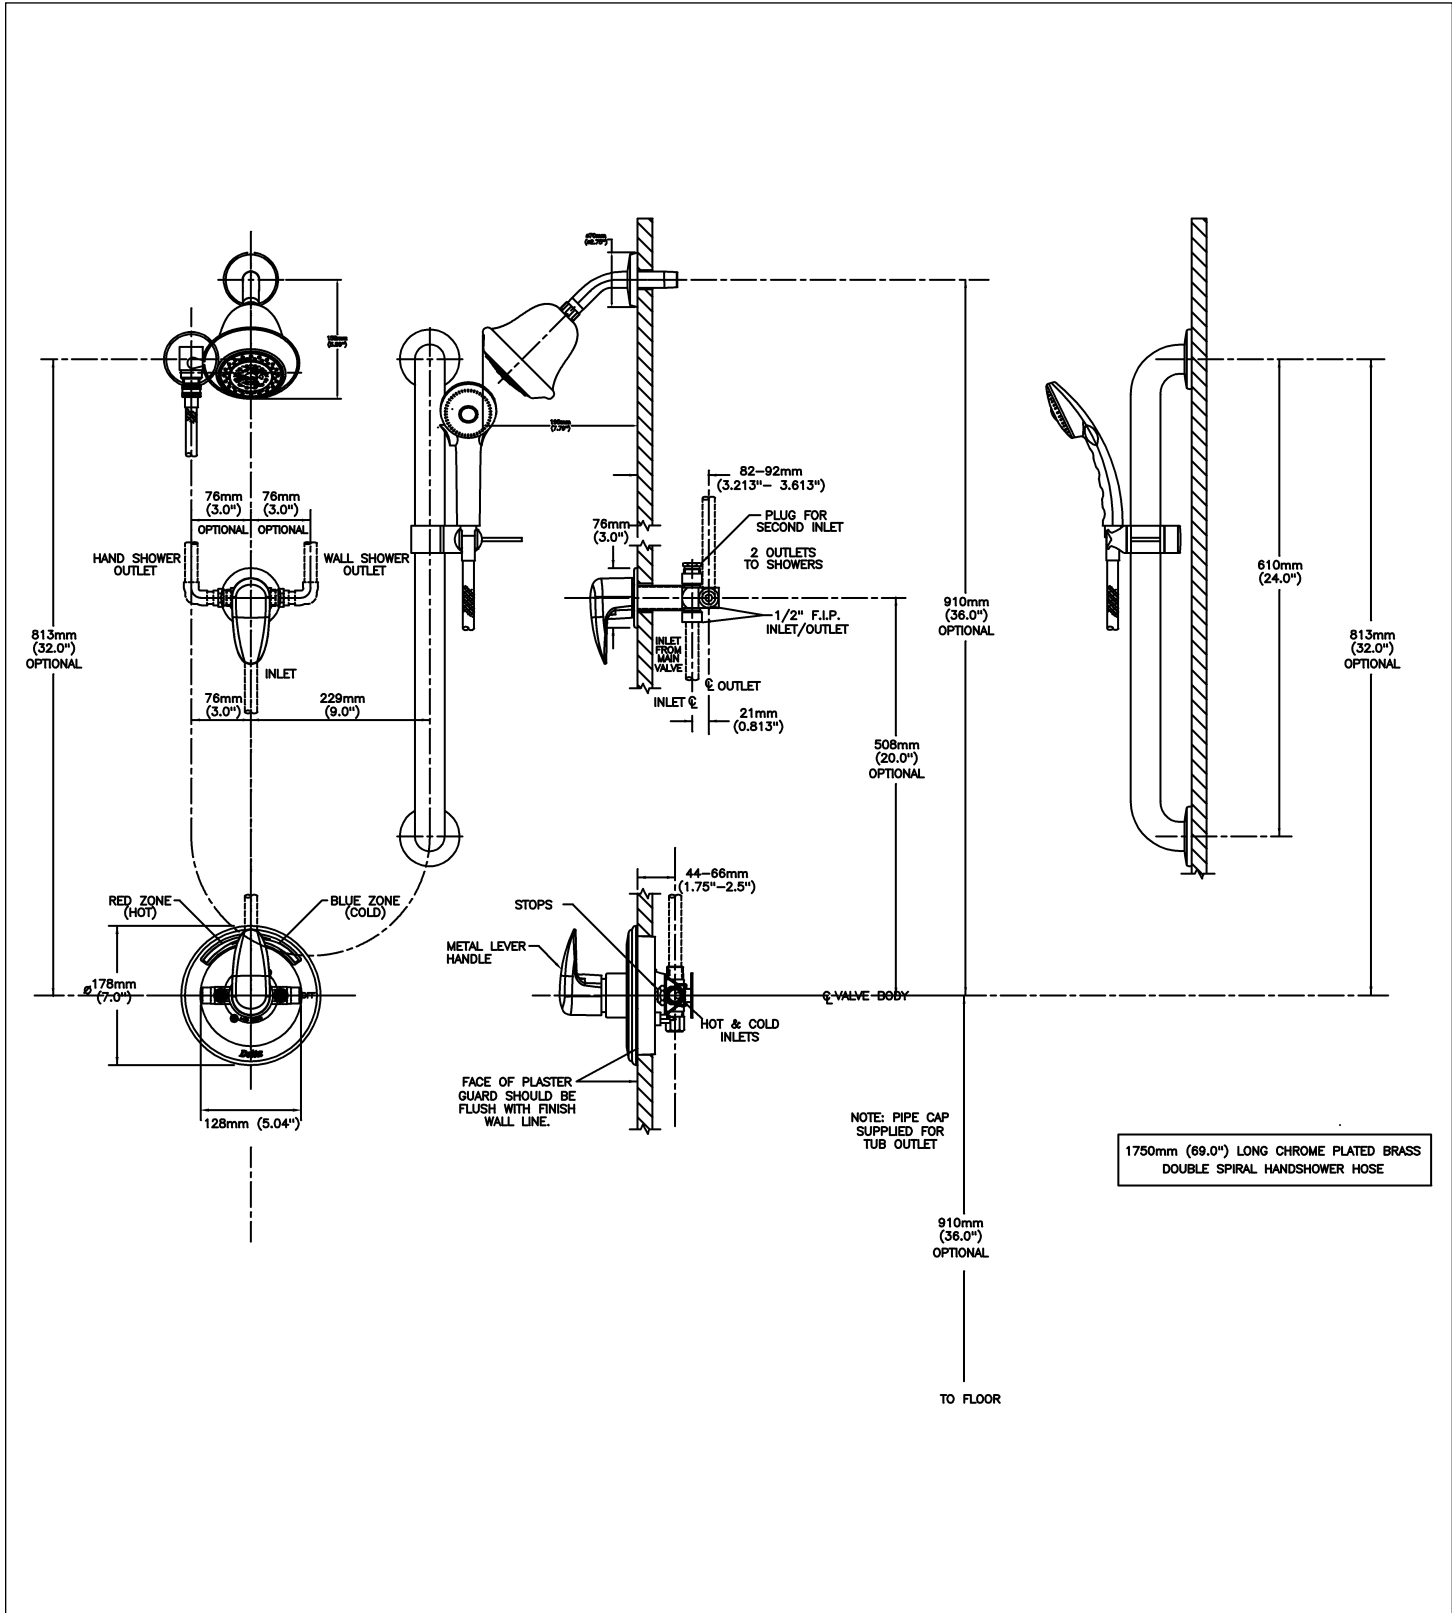

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced November 29, 2017.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
 Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030