

SJS-1750

► **Description**

Sensor Activated, Deck Mount, Electronic Foam Soap Dispenser.

► **Model**

□ SJS-1750 AC Powered, Electronic Foam Soap Dispenser

► **Specifications**

Sensor Activated, Electronic, Chrome Plated Metal Spout, Foam Soap Dispenser with the following features:

- Modular One-piece Construction
- Active Infrared Sensor
- Low Soap Level Indicator
- Easy Loading Disposable Soap Refills
- Locking Foam Tank Case Unit
- Mounting Hardware included

► **Electrical Specifications**

- 120 VAC/6 VDC

► **Variations**

• **Starter Pack**

- **SJS-1751-SP** One (1) Foam Soap Dispenser and one (1) 1000 ml Foam Soap Bottle

► **Warranty**

3 year (limited)

► **ADA Compliant**



The Optima SJS-1750 sensor activated foam soap dispenser is the next evolution in dispenser technology. It uses a refill bottle that simplifies replacement and reduces waste. Its sensor technology offers hands-free operation by delivering a pre-measured foam soap application "on demand."

Benefits

- "Touch-free" operation reduces the risk of germs and cross-contamination during the washing process
- Promotes health and wellness by preventing the spread of infectious diseases
- Encourages handwashing for improved sanitary protection
- Economical pre-measured foam soap dispensing saves soap and money
- Flashing light indicates that soap replacement is required for continuous soap dispensing
- Eliminates "untidiness" from refillable containers
- Easily installs to deck surface
- Three-year Warranty (limited)

This space for Architect/Engineer approval	
Job Name _____	Date _____
Model Specified _____	Quantity _____
Variations Specified _____	
Customer/Wholesaler _____	
Contractor _____	
Architect _____	

SJS-1750

► Description

Sensor Activated, Deck Mount, Electronic Foam Soap Dispenser.


► Model

□ SJS-1750 AC Powered, Electronic Foam Soap Dispenser

OPERATION




As the user's hand enters the beam's effective range, the beam is reflected back into the sensor receiver and activates the solenoid valve allowing a single foam soap application to flow from the spout.

- Flashing light in the sensor window indicates low refill

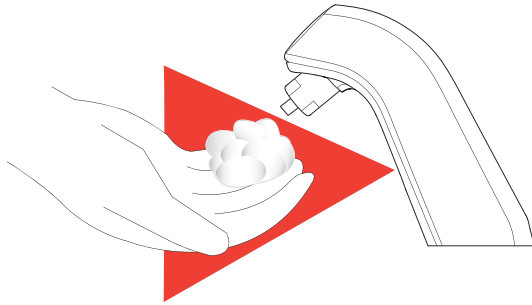

SOAP REPLACEMENT

When the soap Bottle is empty, a new Bottle must be used. The Bottle furnished with the unit is not designed to be refilled. Altering the Bottle and refilling it with soap will void the warranty of the product.

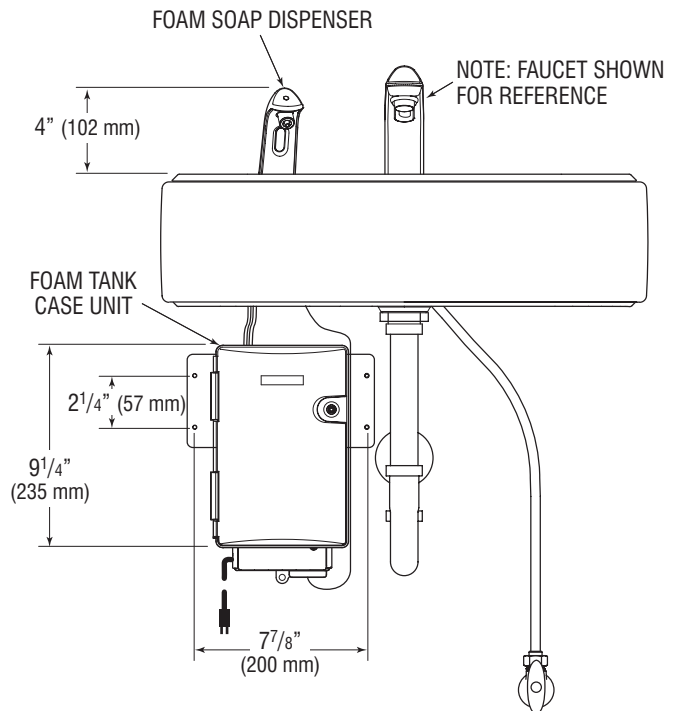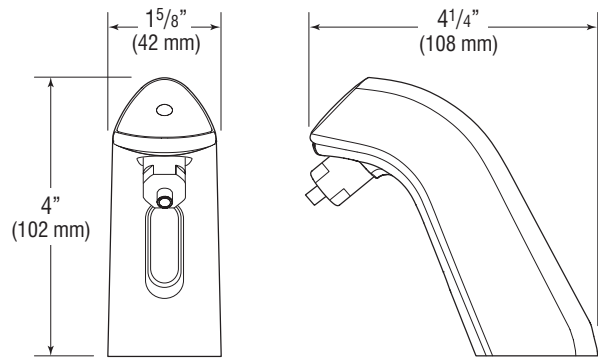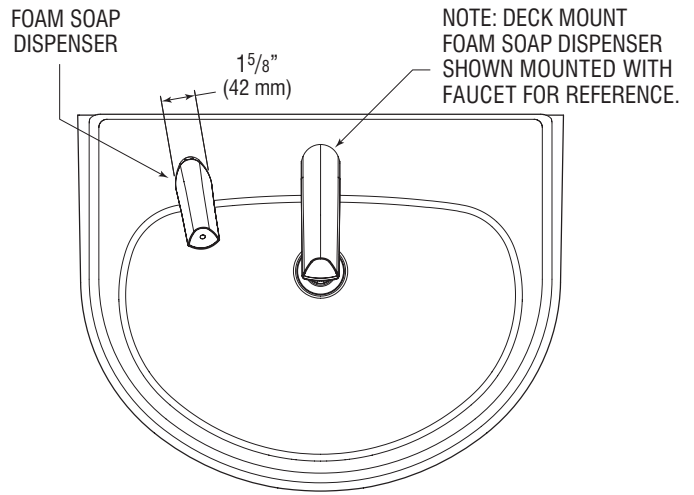

SLOAN VALVE COMPANY • 10500 SEYMOUR AVENUE • FRANKLIN PARK, IL 60131

Phone: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380 • www.sloanvalve.com