

Shown below are the ways to install AmeriVent Pro-Line Chimney Systems.



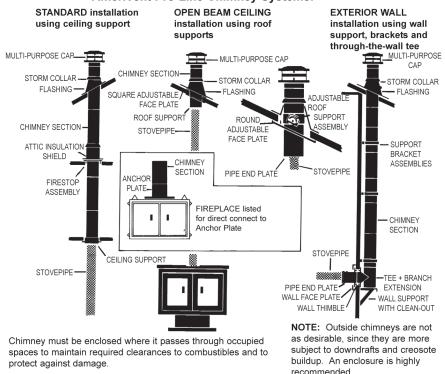

MODEL HS/HSS CHIMNEY

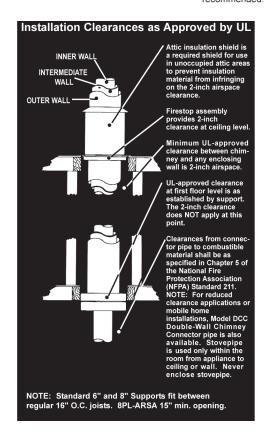

CHIMNEY LENGTHS

Chimney Lengths


- Combine corrosion-resistant stainless steel and sturdy galvanized steel for strong chimney construction
- Lightweight and snap-lock joints offer faster, easier installations
- Also available with a stainless steel outer wall for corrosive environments, Model HSS
- Available in lengths: 6", 12", 18", 24", 36", 48"


PART #	SIZE	ID	OD	LENGTH
6HS-6	6"	6"	9"	6"
6HSS-6	6"	6"	9"	
6HS-12	6"	6"	9"	12"
6HSS-12	6"	6"	9"	
6HS-18	6"	6"	9"	18"
6HSS-18	6"	6"	9"	
6HS-24	6"	6"	9"	24"
6HSS-24	6"	6"	9"	
6HS-36	6"	6"	9"	36"
6HSS-36	6"	6"	9"	
6HS-48	6"	6"	9"	48"
6HSS-48	6"	6"	9"	
8HS-6	8"	8"	11"	6"
8HSS-6	8"	8"	11"	
8HS-12	8"	8"	11"	12"
8HSS-12	8"	8"	11"	
8HS-18	8"	8"	11"	18"
8HSS-18	8"	8"	11"	
8HS-24	8"	8"	11"	24"
8HSS-24	8"	8"	11"	
8HS-36	8"	8"	11"	36"
8HSS-36	8"	8"	11"	
8HS-48	8"	8"	11"	48"
8HSS-48	8"	8"	11"	


ELBOWS 15° and 30° Elbow Set

- For use in pairs to permit chimney to "go around" joists, rafters or other projections
- Add chimney sections between offsets to produce additional offset
- Elbows are available with a stainless steel outer wall for corrosive environments, Model HSS
- Includes two elbows



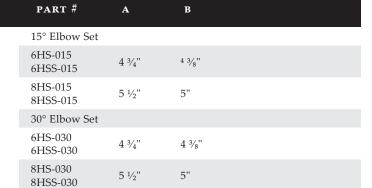





Part #	(2) Elbows		(2) Elbows +6" Section		(2) Elbows +12" Section		(2) Elbows +18" Section		(2) Elbows +24" Section		(2) Elbows +36" Section		(2) Elbows +48" Section	
	Χ	Y	X	Y	X	Y	X	Y	X	Y	Χ	Y	X	Y
6HS-015	1 3/4"	17 3/7"	3 1/4"	23"	4 3/4"	28 1/4"	6 1/4"	33 ½"	7 3/4"	38 ¾"	10 ¾"	49 1/4"	13 ¾"	59 3/4"
6HS-030	4"	17"	7"	22 1/4"	10"	27 ½"	13"	32 ¾"	16"	38"	22"	48 ½"	28"	59"
8HS-015	2 1/4"	21"	3 ¾"	27"	5 1/4"	30 ½"	6 3/4"	36 1/2"	8 1/4"	42"	11 1/4"	53 ½"	14 1/4"	65"
8HS-030	4 ½"	19 ½"	7 ½"	25"	10 ½"	28 1/2"	13 ½"	34"	16 ½"	39"	22 ½"	49 ½"	28 1/2"	60"