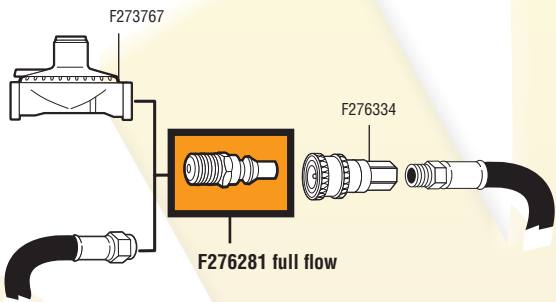
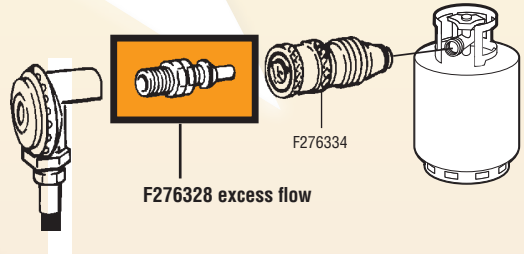
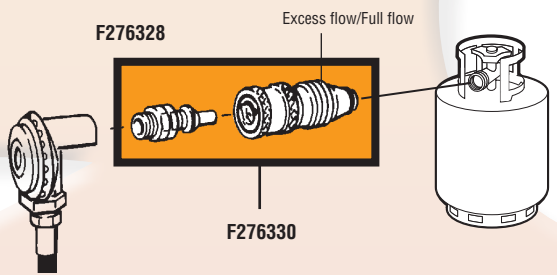
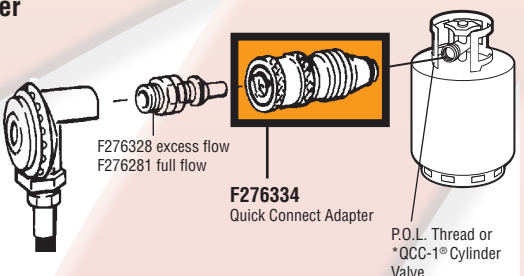
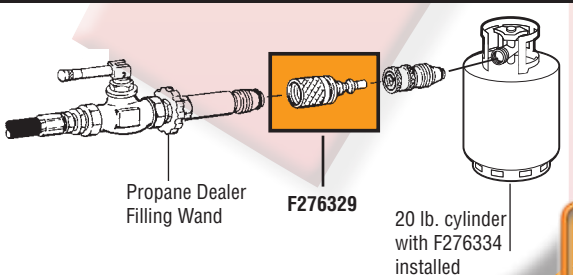


ACCESSORIES

Part#	Description	Application
A. F276281	Propane/Natural Gas Full Flow Male Plug (1/4" Male Pipe Thread x Full Flow Male Plug) Quick Connect Fitting for use with F276330 & F276334, F276186 & F276190 Features: <ul style="list-style-type: none"> • Full Flow Plug (all BTU capacities) • No restrictions 	 <p>F273767</p> <p>F276281 full flow</p> <p>F276334</p>
B. F276328	Propane/Natural Gas Excess Flow Male Plug (1/4" Male Pipe Thread x Male Plug Quick Connect Fitting) For appliances 80,000 BTU's or less. For use with F276334, F276330, F276186, F276190 Features: <ul style="list-style-type: none"> • Thermal Shutoff • Excess Flow • 80,000 BTU capacity low pressure only • CSA Approved • UL Listed 	 <p>F276328 excess flow</p> <p>F276334</p>
C. F276330	Propane Gas Coupling Adapter Kit (1/4" Male Pipe Thread x Male Plug) (Quick Connect x Soft Nose P.O.L.) Most commonly used to upgrade old propane gas grill connections to meet the new safety standards. Features: <ul style="list-style-type: none"> • UL Listed • Gas Mate Series 	 <p>F276328</p> <p>Excess flow/Full flow</p> <p>F276330</p> <p>F276334</p>
D. F276334	Propane Gas Grill "Quick Connect" Adapter (Quick Connect x Soft Nose P.O.L.) Most commonly used on spare cylinder users of Weber, Ducane, PGS or other grills using the Gas Mate II System. Features: <ul style="list-style-type: none"> • UL Listed • Gas Mate Series 	 <p>F276328 excess flow</p> <p>F276281 full flow</p> <p>F276334 Quick Connect Adapter</p> <p>P.O.L. Thread or "QCC-1" Cylinder Valve</p>
E. F276329	Propane Cylinder Fill Plug For use with Mr. Heater's Gas Mate II Quick Connects (7/8" Female P.O.L. x Male Plug) Use L.P. Gas Fill Plug for filling the tank with the Gas Mate II in place	 <p>Propane Dealer Filling Wand</p> <p>F276329</p> <p>20 lb. cylinder with F276334 installed</p>