


- Multi-speed slide control.
- 370 CFM internal blower (<300 CFM with ARP6.)
- Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.
- Two 20-watt halogen lamps included (one level).
- Dishwasher-safe aluminum filters feature a quick-release latch and professional-style appearance.
- Requires separate purchase of a non-ducted kit (RRK51) for indoor exhaust recirculation.
- Ducted/non-ducted telescopic flue accommodates ceiling heights from 8' to 9'. Flue extension for higher ceilings is also available.*
- Install hood so that the bottom of the unit is 24" to 30" above the cooking surface. Mounting height is affected by ceiling height.

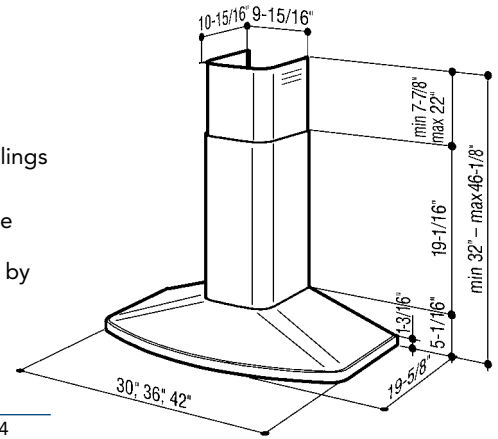

SPECIFICATIONS

Width	CFM	Sones	Volts	Amps	Duct
30", 36", 42"	370**	7.0	120	2.6	6" RD


OPTIONAL ACCESSORIES

Ducted Flue Extension*	RFX5204
Non-ducted Flue Extension*	RFXN5204
Non-ducted Kit†	RRK51
Non-ducted Filter	FILTERSQUARE
Make-Up Air Damper	MD6TU, MD8TU, MD10TU

* Optional flue extension for 10' ceiling.
 ** 299 CFM max with ARP6 reducer plate option.
 † Includes non-ducted filter.



- Multi-speed slide control.
- 370 CFM internal blower (<300 CFM with ARP6.)
- Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.
- Two 20-watt halogen lamps included (one level).
- Dishwasher-safe aluminum filters feature a quick-release latch and professional-style appearance.
- Ducted/non-ducted telescopic flue accommodates ceiling heights from 8' to 9'. Flue extension for higher ceilings is also available.*
- Requires separate purchase of a non-ducted kit (RRK51) for indoor exhaust recirculation.
- Install hood so that the bottom of the unit is 24" to 30" above the cooking surface. Mounting height is affected by ceiling height.

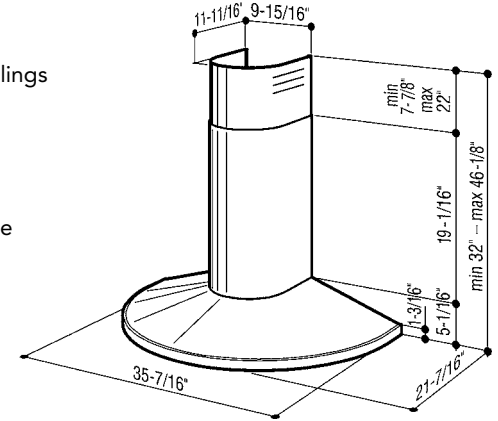

SPECIFICATIONS

Width	CFM	Sones	Volts	Amps	Duct
35-7/16"	370**	7.0	120	2.6	6" RD


OPTIONAL ACCESSORIES

Ducted Flue Extension*	RFX5104
Non-ducted Kit†	RRK51
Non-ducted Filter	FILTERSQUARE
Make-Up Air Damper	MD6TU, MD8TU, MD10TU

* Optional flue extension for 10' ceiling.
 ** 299 CFM max with ARP6 reducer plate option.
 † Includes non-ducted filter.



- Multi-speed slide control and integrated dual light assembly.
- 290 CFM internal blower
- Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.
- Dual 40-watt incandescent lamps included (one level).
- Dishwasher-safe aluminum filter features a quick-release latch and professional style appearance.
- Includes non-ducted kit and charcoal filter for indoor exhaust recirculation.
- Ducted/non-ducted telescopic flue accommodates ceiling heights from 8' to 9'. Flue extension for higher ceilings is also available.*
- Non-ducted flue extensions available in stainless steel only.†*
- Install hood so that the bottom of the unit is 24" to 30" above the cooking surface. Mounting height is affected by ceiling height.
- ENERGY STAR® version on page 33.

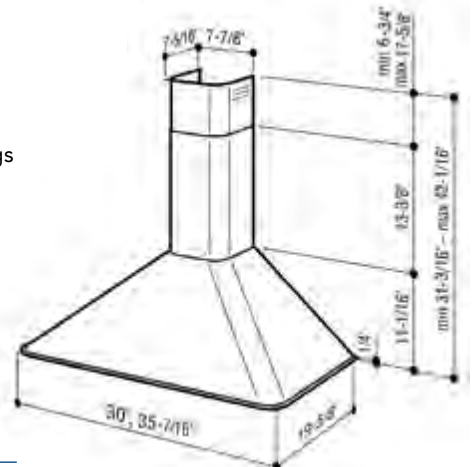

SPECIFICATIONS

Width	CFM	Sones	Volts	Amps	Duct
30", 36", 42"	290	6.5	120	2.9	6" RD

OPTIONAL ACCESSORIES

Ducted Flue Extension*	RFX5004
Non-ducted Filter	FILTEREB40
Non-ducted Flue Extension in Stainless Steel Only†*	RFXN5004
White Flue Extension	RFX5001
Black Flue Extension	RFX5023

* Optional flue extension for 10' ceiling.
 † Includes non-ducted filter.

