

## Bevelers

With a strong aluminum alloy frame, effective roller locking, and good tool life, a smooth 15° bevel is produced on all types of plastic pipe, including gasketed PVC and C900 PVC in about one minute. Depending on wall thickness, the bevel can be up to 1 1/2" long. Easily adjustable for different pipe sizes and thicknesses, with no part changes. Bevel blade can be sharpened or replaced.

Catalog No.	Item Code	Pipe Capacity		Weight	
		Inches-Nominal	Actual Ø mm	lbs	kg
BT1	04395	1 1/2 - 8	40 - 200	3.0	1.4
BT2	04398	1 1/2 - 12	40 - 300	6.1	2.8

IF PIPE IS NOT STATIONARY, A REED PIPE VISE (P. 33-37) IS RECOMMENDED.

### REPLACEMENT BLADES

Catalog No.	Item Code	Description
BT1B	94388	Bevel Blade for BT1 and BT2
BT1SB	94386	Support Blade for BT1 and BT2



### ✓ WHY REED?

Much faster, safer, and far more effective than a file or power saw as it reduces the possibility of injury and leaks after joining pipe.

## Plastic Pipe Joiners

With 28-to-1 leverage, it is easy for one person to join PVC pipe up to 16" gasketed or up to 12" solvent cement joints.

### FOR GASKETED PIPE:

The Plastic Pipe Joiner can connect and separate 4" - 16" IPS and cast iron size gasketed pipe. Components required for joining gasketed pipe include the Plastic Pipe Joiner (PPJ) and V-shaped saddles (PPJVS).

### FOR SOLVENT CEMENT CONNECTIONS:

The Plastic Pipe Joiner connects solvent cement joints on all pipe schedules, IPS, and water pipe from 4" - 12". For solvent cement connections, individually sized saddles must be ordered together with the Plastic Pipe Joiner (PPJ) and the plastic pipe joiner fitting attachment (PPJFA). PPJFA is only used for branch attachments.

### GASKETED PIPE

Catalog No.	Item Code	Pipe Capacity		Weight	
		Inches-Nominal	Actual Ø mm	lbs	kg
PPJ*	04446	—	—	44.0	20.0
PPJVS*	04441	4 - 16	114 - 434	8.0	3.6

\*EXCLUSIVE


### SOLVENT CEMENT CONNECTION

Catalog No.	Item Code	O.D. Capacity		Weight	
		Inches-Nominal	Actual Ø mm	lbs	kg
PPJ*	04446	—	—	44.0	20.0
PPJFA	04439	4 - 12	114 - 324	39.0	17.7

\*EXCLUSIVE

### SADDLES FOR SOLVENT CEMENT CONNECTION (sold in pairs)

Catalog No.	Item Code	O.D. Capacity		Weight	
		Actual Ø in	Actual Ø mm	lbs	kg
PPJ4S	04442	4.5	114	4.0	1.8
PPJ6S	04444	6.625	168	4.5	2.0
PPJ8S	04447	8.825	224	6.0	2.7
PPJ10S	04448	10.75	273	7.0	3.2
PPJ12S	04449	12.75	324	7.0	3.2

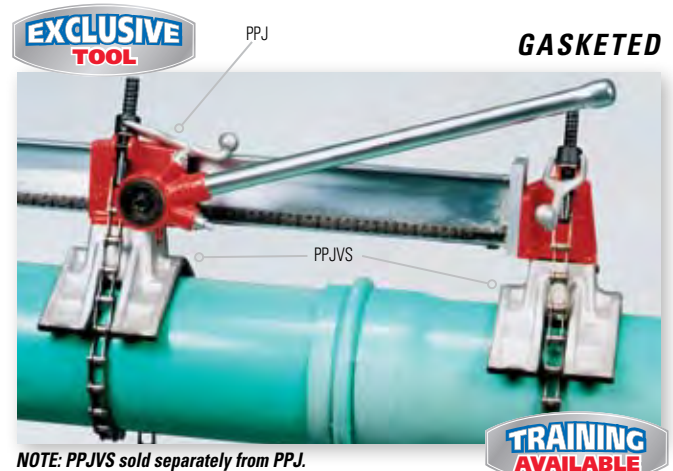

NOTE: PPJVS sold separately from PPJ.

### ✓ WHY REED?

Easy-to-use design for one person operation with no leaks.



NOTE: Fitting attachment (PPJFA) and saddles sold separately from PPJ.

